

REMS Swing

Single-hand tube bender

Practical one-hand pipe bender for dimensionally accurate bending of pipes up to 90°. Ideal for on-site work. For trade and industry. For the building site and the workshop.

Soft copper pipes, also thin-walled	Ø 10–22 mm Ø 3/8–7/8" s ≤ 1 mm
Coated soft copper tubes	Ø 10–18 mm Ø 3/8–5/8" s ≤ 1 mm
Soft, coated carbon steel pipes of the pressfitting systems	Ø 12–18 mm s ≤ 1.2 mm
Soft precision steel tubes	Ø 10–18 mm s ≤ 1 mm
Multi-layer composite tubes	Ø 14–32 mm

REMS Swing – bending tubes where they are installed. Ultra light, ultra small, ultra handy. Universally usable for many pipe types. Ultra fast operation by practical multifunction lever for fast in-feed and fast return. Proven, reliable ratchet feed. Ideal also for coated tubes.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

Cost advantage

Bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design


Compact, job site-proven. Handy and light, drive unit only 0.9 kg. Can be used anywhere, free-hand, in confined areas. Easy, quick working, e.g. Ø 22 mm copper pipe bend in just 9 s. Marked bending formers for exact bending. Crossover, swan-neck, reverse bends possible. Easy and rapid changing of bending formers. Back former support S Ø 10–26 mm, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø 10–26 mm, 3/8–7/8". Back former support Ø 32 mm with back formers for pipe Ø 32 mm. Device for reverse bends up to Ø 22 mm, 7/8".

Bending formers and sliding pieces

In high-strength, high-slide, glass-fibre reinforced polyamide. See table on page 109 for bending formers.

Drive

Sturdy drive unit with proven, reliable ratchet feed for the complete work range up to Ø 32 mm. Practical multi-function lever for fast in-feed and fast return saves time and effort.

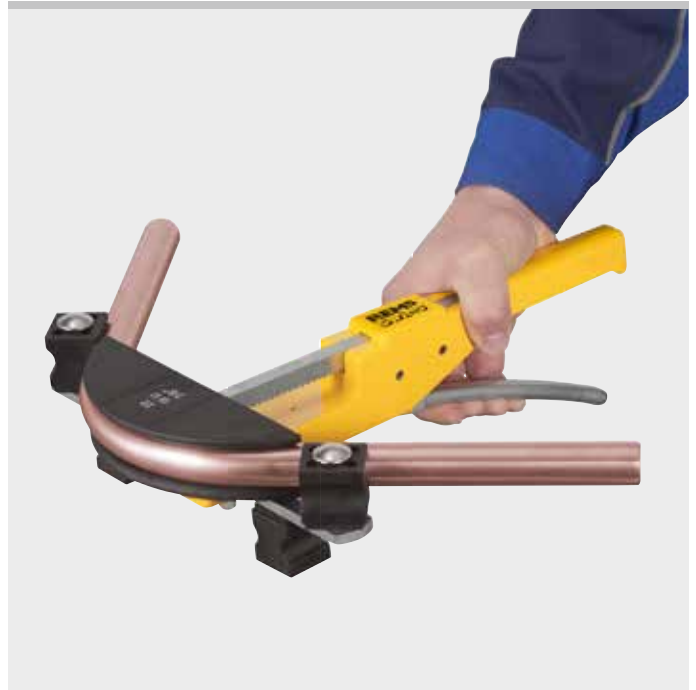

German Quality Product



Info

Supply format

REMS Swing Set. Single-hand tube bender \varnothing 10–32 mm, \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ " , up to 90°. Soft copper pipes \varnothing 10–22 mm, \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ " , $s \leq 1$ mm, soft, coated copper pipes \varnothing 10–18 mm, \varnothing $\frac{3}{8}$ – $\frac{5}{8}$ " , $s \leq 1$ mm, soft, coated carbon steel pipes of the pressfitting systems \varnothing 12–18 mm, $s \leq 1.2$ mm, soft precision steel pipes \varnothing 10–18 mm, $s \leq 1$ mm, composite tubes \varnothing 14–32 mm. Up to \varnothing 26 mm with drive unit, bending formers, back former supports S \varnothing 10–26 mm with back formers, in a sturdy steel box/case. Up to \varnothing 32 mm with drive unit, bending formers, 2 back former supports \varnothing 10–26 mm and \varnothing 32 mm with back formers, in a sturdy steel case.

Description mm	inch	Art.-No.
Set 12-15-18-22	$\frac{1}{2}$ - $\frac{5}{8}$ - $\frac{3}{4}$ - $\frac{7}{8}$ "	153025
Set 10-12-15-18-22	$\frac{3}{8}$ - $\frac{1}{2}$ - $\frac{5}{8}$ - $\frac{3}{4}$ - $\frac{7}{8}$ "	153021
Set 12-14-16-18-22	$\frac{1}{2}$ - $\frac{3}{4}$ - $\frac{7}{8}$ "	153020
Set 14-16-20-25/26		153026
Set 14-16-18-20-25/26		153022
Set 16-20-25/26-32		153029
Set Allround 22		
10-12-14-15-16-17-18-20-22	$\frac{3}{8}$ - $\frac{1}{2}$ - $\frac{5}{8}$ - $\frac{3}{4}$ - $\frac{7}{8}$ "	153027
Set 16-18-20-25/26-32		153023
Set Allround 32		
10-12-14-15-16-17-18-20-22-25/26-32	$\frac{3}{8}$ - $\frac{1}{2}$ - $\frac{5}{8}$ - $\frac{3}{4}$ - $\frac{7}{8}$ "	153028



Accessories

Description	Art.-No.
REMS Swing drive unit	153100
Back former support S \varnothing 10–26 mm with back formers for pipe \varnothing 10–26 mm, $\frac{3}{8}$ – $\frac{7}{8}$ "	153125
Back former support \varnothing 32 mm with back formers for pipe \varnothing 32 mm	153115
Device for reverse bends on laid pipes up to \varnothing 26 mm, $\frac{7}{8}$ "	153140
Steel case with inlay	153265
Case with inlay	153270

Bending former for tubes \varnothing mm/inch	Bending radius ¹⁾ mm	suitable for					Art.-No.
		Cu	Cu-U	St 10305-U	St 10305	V	
10, $\frac{3}{8}$	30	•			•		153155
12, 10 U, $\frac{1}{2}$	36	•	•		•		153160
14, 12 U	50	•		•	•	•	153170
15, 12 U, $\frac{5}{8}$	55	•	•		•		153175
16, 14 U	55	•	•		•	•	153180
17, 15 U	60			•		•	153185
18, 14 U, 15 U, 16 U, $\frac{3}{4}$	72	•	•		•	•	153190
20, 18 U	79	•	•	•		•	153195
22, 18 U, $\frac{7}{8}$	86	•	•				153200
25, 26	88					•	153205
32	128					•	153210

¹⁾ Bending radius mm at the neutral axis of the bend (DVGW GW 392)

- Cu: soft copper tubes, also thin-wall
- St 10305-U: soft, coated carbon steel pipes of the pressfitting systems EN 10305-3
- St 10305: soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3
- U: coated
- V: multi-layer composite tubes of pressfitting systems

