

### REMS RAS Cu – quality pipe cutter. With quick adjustment.

Solid, handy, U-shaped design.



Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe, easy in-feed, easy cutting and precise, right angle cut. Ergonomic, handy operating knob in metal for easy work and long service life.

Ratchet for quick adjustment in both directions.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Only 1 cutter wheel for the complete working capacity Ø 3 – 120 mm.

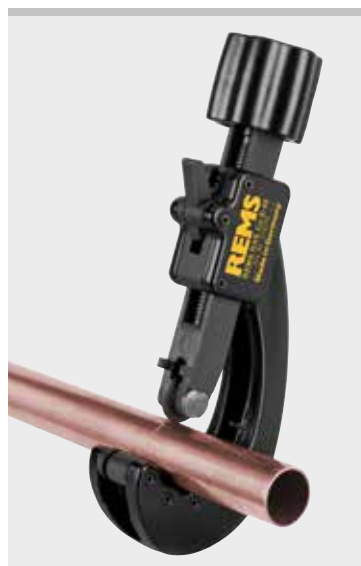

German Quality Products

#### Supply format

**REMS RAS Cu.** Pipe cutter for copper tubes. With cutter wheel.  
In blister pack/in box.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	лв.
<b>Cu 8 – 42</b> with quick adjustment	8 – 42 3/8 – 1 5/8"	3	113370R	<b>303,00</b>
<b>Cu 8 – 64</b> with quick adjustment	8 – 64 3/8 – 2 1/2"	3	113410R	<b>364,00</b>

#### Accessories

Description	Wall thick- ness s ≤ mm	Art.-No.	лв.
<b>REMS cutter wheel Cu 3 – 120, s 3</b>	3	113225R	<b>23,60</b>
<b>Universal deburring blade, ground</b>		113360	<b>15,50</b>

International  
Design Award



# REMS RAS P

## Pipe cutters

### REMS RAS P – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.


Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.



#### Supply format

**REMS RAS P.** Pipe cutter for plastic pipes and multi-layer composite tubess, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	лв.
<b>P 10 – 32 T</b>	10 – 32 1/2 – 1 3/8"	4,5	290001R	<b>114,00</b>
<b>P 10 – 40 T</b>	10 – 40 1/2 – 1 5/8"	4,5	290002R	<b>137,00</b>



High performance quality tools for cutting pipes.  
With quick adjustment.

Plastic pipes,  
multi-layer composite tubes  $\varnothing 10-315 \text{ mm}$   
 $\varnothing \frac{1}{2}-12''$

### REMS RAS P – quality pipe cutter. With quick adjustment.

Solid, handy, U-shaped design.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe, easy in-feed, easy cutting and precise, right angle cut. Ergonomic, handy operating knob in metal for easy work and long service life.

Ratchet for quick adjustment in both directions.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Cutter wheels for different wall thicknesses (s).

REMS RAS P 50–125 with integrated pipe deburrer, on rotating bearing, adapts to the workpiece edge to be deburred. Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life. Fast, simple blade change. Additional guide roller, adjustable, for cutting  $\varnothing 110 \text{ mm}$  or  $\varnothing 125 \text{ mm}$  pipes. Fast cutting wheel change without tools by cutting wheel axle with ball catch.

### Supply format

**REMS RAS P.** Pipe cutter for plastic pipes and multi-layer composite tubes. With cutter wheel. In blister pack/in box.

Description	Pipes $\varnothing \text{ mm/inch}$	Wall thickness $s \leq \text{ mm}$	Art.-No.	лв.
<b>P 10–40*</b> with quick adjustment	10–40 $\frac{1}{2}-1\frac{1}{2}''$	7	290050R	<b>303,00</b>
<b>P 10–63*</b> with quick adjustment	10–63 $\frac{1}{2}-2''$	7	290000R	<b>384,00</b>
<b>P 50–110*, s11</b> with quick adjustment	50–110 2–4"	11	290100R	<b>459,00</b>
<b>P 50–110*, s16</b> with quick adjustment	50–110 2–4"	16	290100R	<b>459,00</b>
<b>P 50–110*, s19</b> with quick adjustment	50–90 2–3"	19	290100R	<b>459,00</b>
<b>P 50–125, s16</b> with quick adjustment	50–125 2–5"	16	290500R-S16	<b>474,00</b>
<b>P 110–160*</b> with quick adjustment	110–160 4–6"	16	290200R	<b>570,00</b>

### REMS RAS P – cutting up to $\varnothing 315 \text{ mm}$ , $s \leq 19 \text{ mm}$ .

Fast and inexpensive cutting of large pipes. Quick adjustment.

Separate pipe centering for right angle cutting.

Solid design, double-T-shaped body.

Cutter wheels for different wall thicknesses (s).


### Supply format

**REMS RAS P.** Pipe cutter for plastic pipes and multi-layer composite tubes. With cutter wheel and spare cutter wheel. In sturdy steel case.

Description	Pipes $\varnothing \text{ mm/inch}$	Wall thickness $s \leq \text{ mm}$	Art.-No.	лв.
<b>P 180–315</b> with quick adjustment	180–315 7–12"	16	290300	<b>3 360,00</b>

### Accessories

Description	$s \leq \text{ mm}$	Art.-No.	лв.
<b>REMS cutter wheel P 10–40, s 4,5</b> for REMS RAS P 10–32 T, 10–40 T	4,5	290023R	<b>38,20</b>
<b>REMS cutter wheel P 10–63, s 7</b> for REMS RAS P 10–40, 10–63	7	290016R	<b>38,20</b>
<b>REMS cutter wheel P 50–315, s 11</b> for REMS RAS P 50–110, 50–125, 110–160, 180–315	11	290116R	<b>46,30</b>
<b>REMS cutter wheel P 50–315, s 16</b> for REMS RAS P 50–110, 50–125, 110–160, 180–315	16	290216R	<b>55,30</b>
<b>REMS cutter wheel P 50–315, s 19</b> for REMS RAS P 50–110, 110–160, 180–315	19	290316R	<b>89,20</b>



\*German Quality Products



**International  
Design Award**

P 50–110, s11  
P 50–110, s16  
P 50–110, s19

