

for all common pressfitting systems

**Select REMS pressing tongs/
REMS pressing rings yourself!**

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 238) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press (page 185) using the adapter tong Z8.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (Patent EP 2 027 971).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Adapter tongs required, see page 238.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 238. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing ring (PR-2B)

REMS pressing ring (PR-2B) with 2 pressing jaws, for secure engagement of the pressing jaws in tight spaces, for midsize dimensions. Adapter tongs required for driving the REMS (PR-2B) pressing rings, see page 238.

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 238.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Confirmation of suitability

See page 239.

Hold-Harmless and Indemnification Agreement

See page 240.



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)



REMS pressing rings (PR-2B)




REMS pressing ring S (PR-2B), continuously swivellable

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

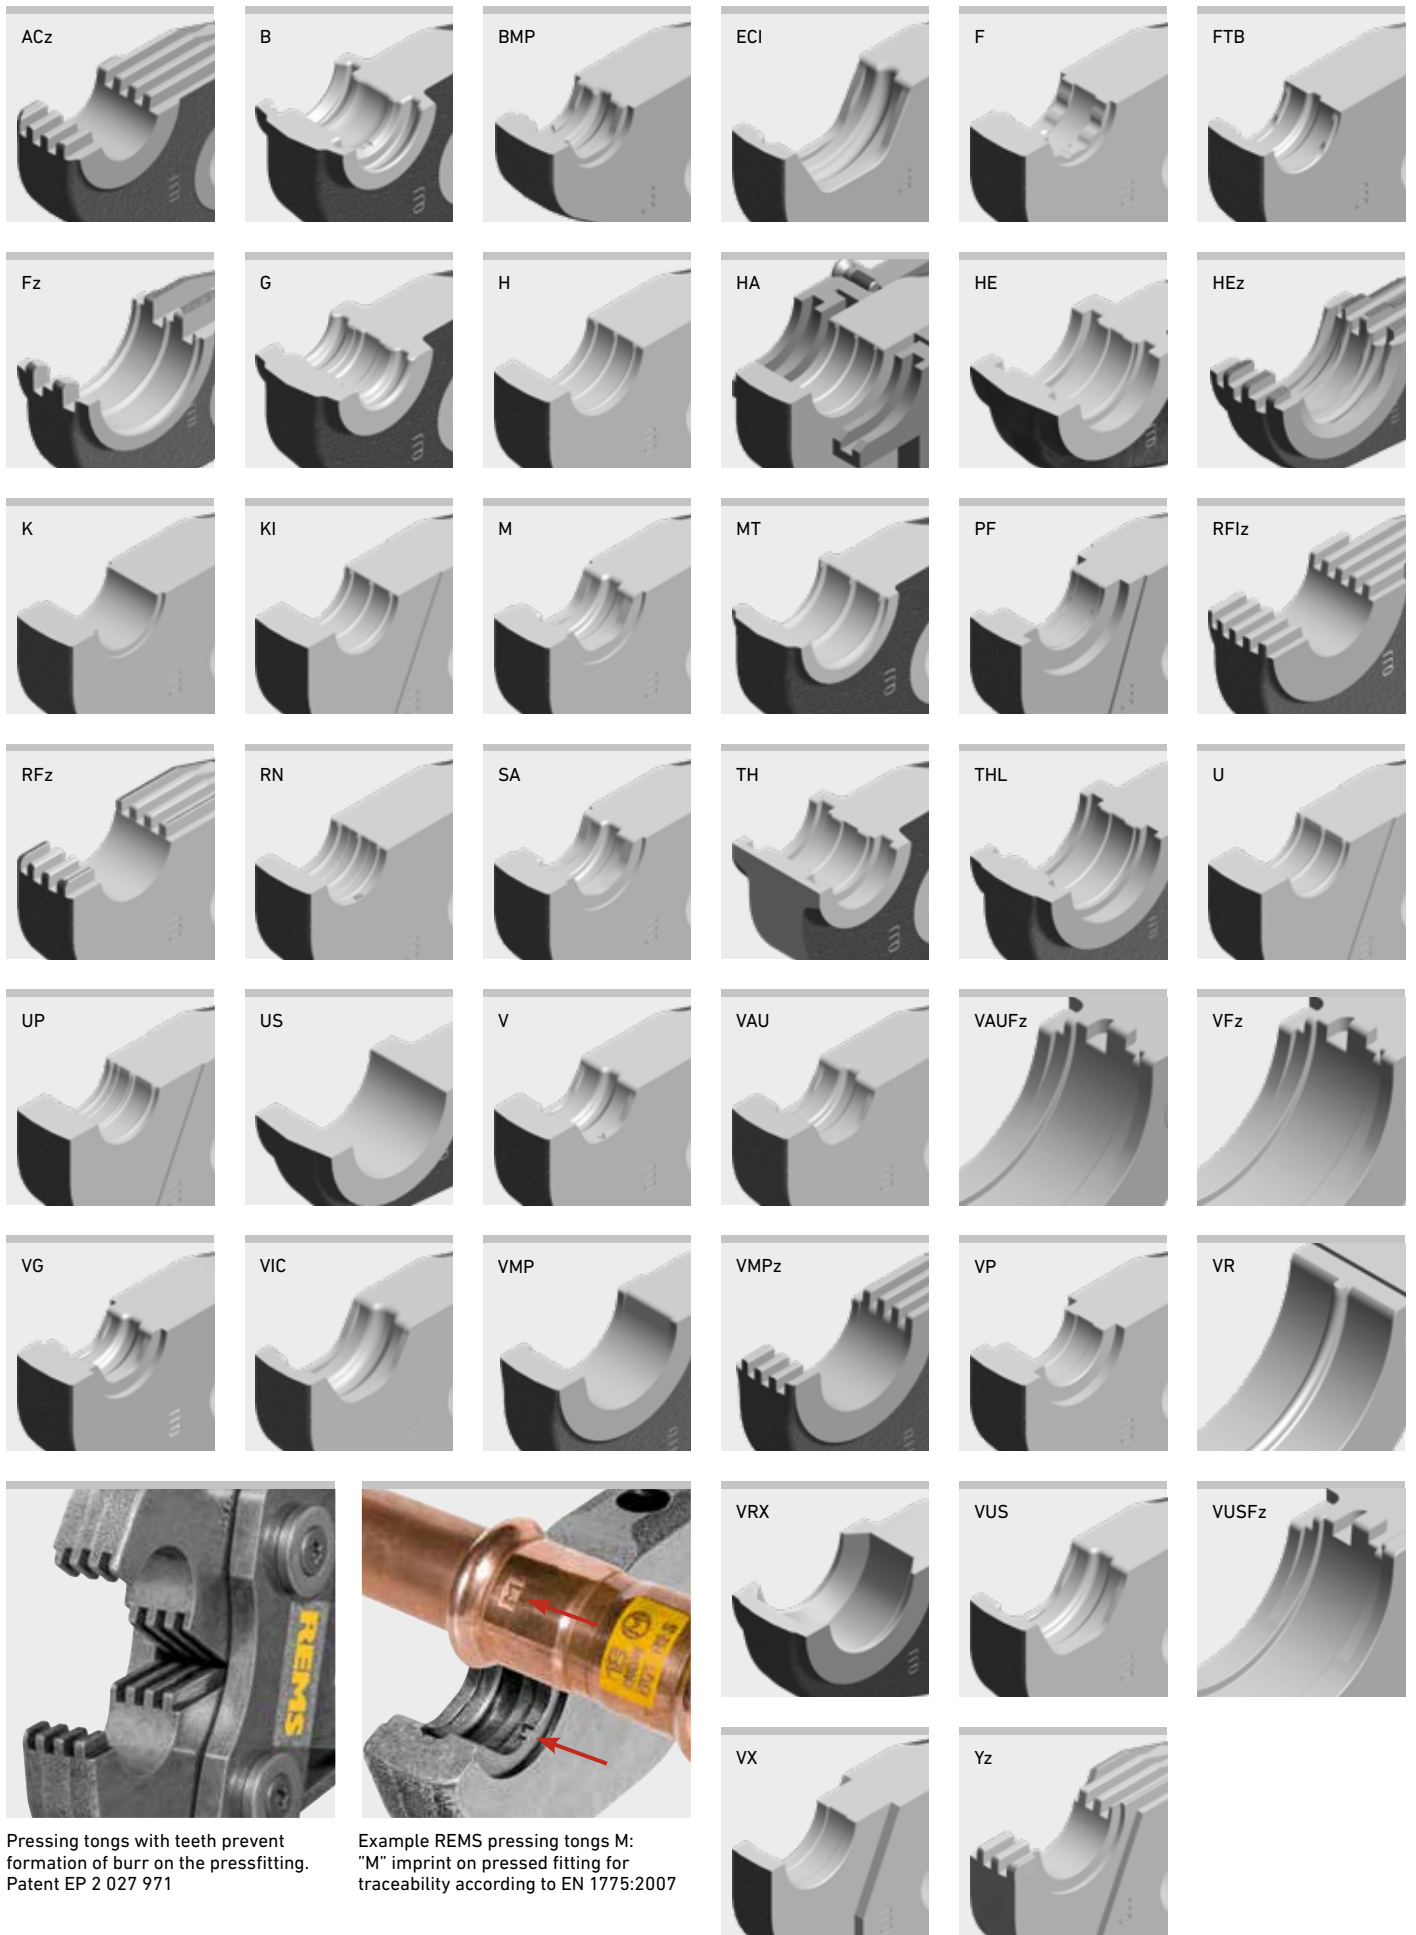

Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs M: "M" imprint on pressed fitting for traceability according to EN 1775:2007

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
A				
Aalberts integrated piping systems	U 14*		570760	353,00
VSH MultiPress	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	TH 14*		570455	377,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 14 S (PR-2B)**	Z8	574778 R	252,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
Aalberts integrated piping systems	U 16 ²⁾		570765	353,00
VSH MultiPress Gas ²⁾	U 20 ²⁾		570775	353,00
	U 25 ²⁾		570780	353,00
	TH 16 ²⁾		570460	377,00
	TH 20 ²⁾		570470	377,00
	TH 16 S (PR-2B) ²⁾	Z8	574782 R	252,00
	TH 20 S (PR-2B) ²⁾	Z8	574788 R	252,00
Aalberts integrated piping systems	V 12		570107	313,00
VSH SudoPress Carbon	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
Aalberts integrated piping systems	V 12		570107	313,00
VSH SudoPress Copper	V 14		570112	313,00
	VG 14		570132	313,00
	V 15		570115	313,00
	V 16		570117	313,00
	VG 16		570137	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 14 S (PR-2B)	Z8	574800 R	252,00
	VG 14 S (PR-2B)	Z8	574750 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	VG 16 S (PR-2B)	Z8	574754 R	252,00
	V 16 S (PR-2B)	Z8	574802 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
Aalberts integrated piping systems	V 12		570107	313,00
VSH SudoPress Copper Gas	V 14		570112	313,00
	VG 14		570132	313,00
	V 15		570115	313,00
	V 16		570117	313,00
	VG 16		570137	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 14 S (PR-2B)	Z8	574800 R	252,00
	VG 14 S (PR-2B)	Z8	574750 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	VG 16 S (PR-2B)	Z8	574754 R	252,00
	V 16 S (PR-2B)	Z8	574802 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
Aalberts integrated piping systems	V 15		570115	313,00
VSH SuoPress	V 18		570125	313,00
Stainless	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
Aalberts integrated piping systems	M 12		570100	313,00
VSH XPress Carbon	M 15		570110	313,00
	M 18 ¹⁾		570120	313,00
	M 22		570130	313,00
	M 28 ¹⁾		570140	313,00
	M 35		570150	313,00
	M 42 (PZ-46)		570160	1.010,00
	M 54 (PZ-46)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 12 S (PR-2B)	Z8	574736 R	252,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
Aalberts integrated piping systems	M 12		570100	313,00
VSH XPress Copper	M 15		570110	313,00
	M 18 ¹⁾		570120	313,00
	M 22		570130	313,00
	M 28 ¹⁾		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109 R	2.750,00
	M 12 S (PR-2B)	Z8	574736 R	252,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
Aalberts integrated piping systems	M 15		570110	313,00
VSH XPress Copper Gas	M 18 ¹⁾		570120	313,00
	M 22		570130	313,00
	M 28 ¹⁾		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
Aalberts integrated piping systems	M 15		570110	313,00
VSH XPress Stainless	M 18 ¹⁾		570120	313,00
	M 22		570130	313,00
	M 28 ¹⁾		570140	313,00
	M 35		570150	313,00
	M 42 (PZ-46)		570160	1.010,00
	M 54 (PZ-46)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
Aalberts integrated piping systems	M 15		570110	313,00
VSH XPress Stainless Gas	M 18 ¹⁾		570120	313,00
	M 22		570130	313,00
	M 28 ¹⁾		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM
AC-FIX PRESS (Global Piping Systems)	H 12*		570300	340,00	AHLSELL A-press elförzinkad V	V 12		570107	313,00
	H 16*		570320	340,00		V 15		570115	313,00
	H 20*		570350	340,00		V 18		570125	313,00
	H 25*		570360	340,00		V 22		570135	313,00
	H 32		570380	340,00		V 28		570145	313,00
	RFz 12*		571320	393,00		V 35		570155	313,00
	RFz 16*		571325	393,00		V 42		570165	729,00
	RFz 20*		571330	393,00		V 54		570175	750,00
	RFz 25		571335	393,00		V 12 S (PR-2B)	Z8	574748 R	252,00
	RFz 32		571340	393,00		V 15 S (PR-2B)	Z8	574752 R	252,00
	U 16*		570765	353,00		V 18 S (PR-2B)	Z8	574756 R	252,00
	U 20*		570775	353,00		V 22 S (PR-2B)	Z8	574758 R	252,00
	U 25*		570780	353,00		V 28 S (PR-2B)	Z8	574760 R	252,00
	U 32		570785	414,00		V 35 S (PR-2B)	Z8	574762 R	277,00
	VX 16*		571635	435,00		AHLSELL	M 12	570100	313,00
	VX 20*		571640	435,00		A-press koppar M	M 15	570110	313,00
	AC-FIX PRESS DUO (Global Piping Systems)	RFz 16*		571325		393,00	M 18	570120	313,00
		RFz 20*		571330		393,00	M 22	570130	313,00
		RFz 25		571335		393,00	M 28	570140	313,00
		RFz 32		571340		393,00	M 35	570150	313,00
TH 16*			570460	377,00	M 42 (PR-3S)	Z2	572706 R	1.370,00	
TH 20*			570470	377,00	M 54 (PR-3S)	Z2	572708 R	1.370,00	
TH 25*			570495	377,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
TH 26*			570475	377,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
TH 32			570480	377,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00	M 15 S (PR-2B)	Z8	574738 R	252,00	
TH 20 S (PR-2B)**		Z8	574788 R	252,00	M 18 S (PR-2B)	Z8	574740 R	252,00	
TH 25 S (PR-2B)**		Z8	574792 R	252,00	M 22 S (PR-2B)	Z8	574742 R	252,00	
TH 26 S (PR-2B)**		Z8	574794 R	252,00	M 28 S (PR-2B)	Z8	574744 R	252,00	
TH 32 S (PR-2B)		Z8	574798 R	277,00	M 35 S (PR-2B)	Z8	574746 R	277,00	
U 16*			570765	353,00	AHLSELL	V 12	570107	313,00	
U 20*			570775	353,00	A-press koppar V	V 15	570115	313,00	
U 25*			570780	353,00	V 18		570125	313,00	
U 32			570785	414,00	V 22		570135	313,00	
AC-FIX PRESS-MULTI (Global Piping Systems)		H 16*		570320	340,00	V 28		570145	313,00
		H 18*		570340	340,00	V 35		570155	313,00
	H 20*		570350	340,00	V 42		570165	729,00	
	H 25*		570360	340,00	V 54		570175	750,00	
	H 32		570380	340,00	V 12 S (PR-2B)	Z8	574748 R	252,00	
	RFz 16*		571325	393,00	V 15 S (PR-2B)	Z8	574752 R	252,00	
	RFz 20*		571330	393,00	V 18 S (PR-2B)	Z8	574756 R	252,00	
	RFz 25		571335	393,00	V 22 S (PR-2B)	Z8	574758 R	252,00	
	RFz 32		571340	393,00	V 28 S (PR-2B)	Z8	574760 R	252,00	
	U 16*		570765	353,00	V 35 S (PR-2B)	Z8	574762 R	277,00	
	U 18*		570770	353,00	AHLSELL	M 15	570110	313,00	
	U 20*		570775	353,00	A-press rostfritt	M 18	570120	313,00	
	U 25*		570780	353,00	M 22	570130	313,00		
	U 32		570785	414,00	M 28	570140	313,00		
	ACOME MT	ACz 12*		572642	393,00	M 35	570150	313,00	
		ACz 16*		572644	393,00	M 42 (PR-3S)	Z2	572706 R	1.370,00
		ACz 20*		572646	393,00	M 54 (PR-3S)	Z2	572708 R	1.370,00
		ACz 25		572648	393,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
						M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	AHLSELL A-press elförzinkad M	M 12		570100	313,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
M 15			570110	313,00	M 15 S (PR-2B)	Z8	574738 R	252,00	
M 18			570120	313,00	M 18 S (PR-2B)	Z8	574740 R	252,00	
M 22			570130	313,00	M 22 S (PR-2B)	Z8	574742 R	252,00	
M 28			570140	313,00	M 28 S (PR-2B)	Z8	574744 R	252,00	
M 35			570150	313,00	M 35 S (PR-2B)	Z8	574746 R	277,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00	AIRBEL	M 15	570110	313,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00	PRESSCLIM	M 18	570120	313,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	M 22	570130	313,00		
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	M 28	570140	313,00		
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	M 35	570150	313,00		
M 12 S (PR-2B)		Z8	574736 R	252,00	M 42 (PR-3S)	Z2	572706 R	1.370,00	
M 15 S (PR-2B)		Z8	574738 R	252,00	M 54 (PR-3S)	Z2	572708 R	1.370,00	
M 18 S (PR-2B)		Z8	574740 R	252,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
M 22 S (PR-2B)		Z8	574742 R	252,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
M 28 S (PR-2B)	Z8	574744 R	252,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
M 35 S (PR-2B)	Z8	574746 R	277,00	M 15 S (PR-2B)	Z8	574738 R	252,00		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
AIRBEL	M 15		570110	313,00
SERTINOX	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
ALB	TH 16*		570460	377,00
Sistema Multicapa para calefacción y sanitario	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 26* ¹²⁾		570750	414,00
	U 32		570785	414,00
	U 40		570790	504,00
ALB	TH 16*		570460	377,00
Sistema Multicapa para Gas	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 26* ¹²⁾		570750	414,00
	U 32		570785	414,00
ALTECH Altech	Rfz 12*		571320	393,00
	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
APE MULTYGAS Serie AP Gas	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
APE Serie AP	B 16*		570850	412,00
	B 20*		570860	412,00
	B 26		570870	454,00
	B 32		570880	454,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
APE Serie APL	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
AQUATECHNIK Press-fitting metal	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 26* ¹²⁾		570750	414,00
	U 32		570785	414,00
AQUATECHNIK Universal	B 16*		570850	412,00
	B 20*		570860	412,00
	B 26		570870	454,00
	B 32		570880	454,00
	F 16*		570717	359,00
	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
	F 32 S (PR-2B)	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 26* ¹²⁾		570750	414,00
	U 32		570785	414,00
ARKA DUROsystem	H 16*		570320	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
Aschl NIR	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
ASSOTHERM IPC-RAC Carbon Steel	M 15		570110	313,00	ASSOTHERM IPR-RRR Copper	M 15		570110	313,00
	M 18		570120	313,00		M 18		570120	313,00
	M 22		570130	313,00		M 22		570130	313,00
	M 28		570140	313,00		M 28		570140	313,00
	M 35		570150	313,00		M 35		570150	313,00
	M 42 (PZ-4G)		570160	1.010,00		M 42 (PZ-4G)		570160	1.010,00
	M 54 (PZ-4G)		570170	1.010,00		M 54 (PZ-4G)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00		M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00		M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	2.350,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	2.750,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	2.750,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00		M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00		M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00		M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00		M 28 S (PR-2B)	Z8	574744 R	252,00
M 35 S (PR-2B)	Z8	574746 R	277,00	M 35 S (PR-2B)	Z8	574746 R	277,00		
ASSOTHERM IPI-RAX Inox	M 15		570110	313,00	ASSOTHERM IPR-RRR Copper Gas	M 15		570110	313,00
	M 18		570120	313,00		M 18		570120	313,00
	M 22		570130	313,00		M 22		570130	313,00
	M 28		570140	313,00		M 28		570140	313,00
	M 35		570150	313,00		M 35		570150	313,00
	M 42 (PZ-4G)		570160	1.010,00		M 15 S (PR-2B)	Z8	574738 R	252,00
	M 54 (PZ-4G)		570170	1.010,00		M 18 S (PR-2B)	Z8	574740 R	252,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00		M 22 S (PR-2B)	Z8	574742 R	252,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00		M 28 S (PR-2B)	Z8	574744 R	252,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	2.350,00		M 35 S (PR-2B)	Z8	574746 R	277,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	2.750,00		ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8"	571450	429,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	2.750,00			US 1/2"	571455	429,00
	M 15 S (PR-2B)	Z8	574738 R	252,00			US 3/4"	571460	429,00
	M 18 S (PR-2B)	Z8	574740 R	252,00			US 1"	571465	429,00
	M 22 S (PR-2B)	Z8	574742 R	252,00			US 1 1/4"	571470	429,00
	M 28 S (PR-2B)	Z8	574744 R	252,00			US 1 1/2"	571475	429,00
M 35 S (PR-2B)	Z8	574746 R	277,00		US 2"	571477	578,00		
ASSOTHERM IPI-RAX Inox Gas	M 15		570110	313,00	ATUSA ITALIA	M 15		570110	313,00
	M 18		570120	313,00	INSTALPRESS	M 18		570120	313,00
	M 22		570130	313,00	CARBON STEEL	M 22		570130	313,00
	M 28		570140	313,00	PRESS FITTINGS	M 28		570140	313,00
	M 35		570150	313,00		M 35		570150	313,00
	M 42 (PZ-4G)		570160	1.010,00	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PZ-4G)		570170	1.010,00	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	2.350,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	2.750,00	
	M 76,1 XL (PR-3S)	Z7 XL 45kN ⁴⁾	579101 R	2.350,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	2.750,00	
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45kN ⁴⁾	579110 R	2.750,00	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45kN ⁴⁾	579111 R	2.750,00	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	M 35 S (PR-2B)	Z8	574746 R	277,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	ATUSA ITALIA	M 15		570110	313,00
M 35 S (PR-2B)	Z8	574746 R	277,00	INSTALPRESS	M 18		570120	313,00	
ASSOTHERM IPM-Multistrato	H 16*		570320	340,00	STAINLESS STEEL	M 22		570130	313,00
	H 20*		570350	340,00	PRESS FITTINGS	M 28		570140	313,00
	H 26*		570370	340,00		M 35		570150	313,00
	H 32		570380	340,00	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	TH 16*		570460	377,00	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	TH 20*		570470	377,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	2.350,00	
	TH 26*		570475	377,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	2.750,00	
	TH 32		570480	377,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	2.750,00	
	THL 32		570487	377,00	M 15 S (PR-2B)	Z8	574738 R	252,00	
	TH 40		570485	500,00	M 18 S (PR-2B)	Z8	574740 R	252,00	
	TH 50 (PZ-S)		572400	1.310,00	M 22 S (PR-2B)	Z8	574742 R	252,00	
	TH 63 (PZ-S)		572405	1.310,00	M 28 S (PR-2B)	Z8	574744 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	M 35 S (PR-2B)	Z8	574746 R	277,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	AUSTEC	TH 16*		570460	377,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	PEX-B, PEX-AL-PEX (AUS)	TH 20*		570470	377,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00		TH 25*		570495	377,00
	U 16*		570765	353,00		TH 32		570480	377,00
	U 20*		570775	353,00		U 16*		570765	353,00
	U 26* ¹²⁾		570750	414,00		U 20*		570775	353,00
	U 32		570785	414,00		U 25*		570780	353,00
						U 32		570785	414,00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 32		570480	377,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
AYOR FIXOCONNECT Press	H 12*		570300	340,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	Rfz 12*		571320	393,00
	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
AYOR FIXOMULTIX	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 32		570785	414,00
U 40		570790	504,00	
U 50		570795	605,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00	
U 63 (PZ-S)		572365	1.310,00	
U 75 (PR-3B)	Z4	572828 R	1.310,00	
AYOR SOMATHERM FOR YOU -1	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	U 16*		570765	353,00
	U 20*		570775	353,00
AYOR SOMATHERM FOR YOU -2	H 12*		570300	340,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	Rfz 12*		571320	393,00
	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00

B

Bampi BALPEX serie LP	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 26* ⁽¹²⁾		570750	414,00
	U 32		570785	414,00
	U 40		570790	504,00
U 50		570795	605,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00	
U 63 (PZ-S)		572365	1.310,00	
Bampi BALPEX serie MP	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
Bampi BALPEX Gas	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300	340,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 32		570380	340,00
	Rfz 12*		571320	393,00
	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	U 16*		570765	353,00
	U 20*		570775	353,00
U 25*		570780	353,00	
U 32		570785	414,00	
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310	340,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	Rfz 16*		571325	393,00
	Rfz 18*		571327	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	Rfz 32		571340	393,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
TH 32		570480	377,00	
TH 16 S (PR-2B)**	Z8	574782 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
U 16*		570765	353,00	
U 18*		570770	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 32		570785	414,00	
U 40		570790	504,00	
U 50		570795	605,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00	
U 63 (PZ-S)		572365	1.310,00	
BEGETUBE/ IVAR	B 14*		570845	412,00
	B 16*		570850	412,00
	B 18*		570855	412,00
	B 20*		570860	412,00
	B 26		570870	454,00
	B 32		570880	454,00
	Fz 40		570742	416,00
	Fz 50		570747	630,00
	F 63 (PZ-S)		572385	1.310,00
	Fz 75 (PR-3B)	Z4	572830 R	1.240,00
	Béné inox Série 41	M 15		570110
M 18			570120	313,00
M 22			570130	313,00
M 28			570140	313,00
M 35			570150	313,00
M 42 (PR-3S)		Z2	572706 R	1.370,00
M 54 (PR-3S)		Z2	572708 R	1.370,00
M 76,1 XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00
M 88,9 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00
M 108,0 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00
M 15 S (PR-2B)		Z8	574738 R	252,00
M 18 S (PR-2B)	Z8	574740 R	252,00	
M 22 S (PR-2B)	Z8	574742 R	252,00	
M 28 S (PR-2B)	Z8	574744 R	252,00	
M 35 S (PR-2B)	Z8	574746 R	277,00	
Brass Form Master-Al-Pex	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
U 16*		570765	353,00	
U 18*		570770	353,00	
U 20*		570775	353,00	
Brass & Fittings PRESSMAN MultiPress	Rfz 16*		571325	393,00
	Rfz 18*		571327	393,00
	Acz 20*		572646	393,00
	Rfz 25		571335	393,00
Rfz 32		571340	393,00	
Brass & Fittings PRESSMAN RetiPress	Rfz 16*		571325	393,00
	Rfz 18*		571327	393,00
	Acz 20*		572646	393,00
	Rfz 25		571335	393,00
Rfz 32		571340	393,00	

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM		
BRASSTECH MULTitermoSAN Brasspress	B 16*		570850	412,00	CHIALI CHIALIPEX	TH 16*		570460	377,00		
	B 20*		570860	412,00		TH 20*		570470	377,00		
	B 26		570870	454,00		TH 26*		570475	377,00		
	B 32		570880	454,00		TH 32		570480	377,00		
	F 16*		570717	359,00		TH 40		570485	500,00		
	F 20*		570727	359,00		TH 50 (PZ-S)		572400	1.310,00		
	F 26*		570730	389,00		TH 63 (PZ-S)		572405	1.310,00		
	F 16 S (PR-2B)**	Z8	574728 R	252,00		Climatrix Climatrix Rhinopex	H 16*		570320	340,00	
	F 20 S (PR-2B)**	Z8	574730 R	252,00			H 20*		570350	340,00	
	F 26 S (PR-2B)**	Z8	574732 R	252,00			U 16*		570765	353,00	
	H 16*		570320	340,00			U 20*		570775	353,00	
	H 18*		570340	340,00			U 26* ¹²⁾		570750	414,00	
	H 20*		570350	340,00			TH 14*		570455	377,00	
	H 26*		570370	340,00			TH 16*		570460	377,00	
	TH 16*		570460	377,00			TH 18*		570465	377,00	
	TH 18*		570465	377,00			TH 20*		570470	377,00	
	TH 20*		570470	377,00			TH 26*		570475	377,00	
	TH 26*		570475	377,00		TH 32		570480	377,00		
	TH 32		570480	377,00		TH 16 S (PR-2B)**	Z8	574782 R	252,00		
	TH 40		570485	500,00		TH 20 S (PR-2B)**	Z8	574788 R	252,00		
	TH 50 (PZ-S)		572400	1.310,00		TH 26 S (PR-2B)**	Z8	574794 R	252,00		
	TH 63 (PZ-S)		572405	1.310,00		TH 32 S (PR-2B)	Z8	574798 R	277,00		
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		Climatrix Variotherm	TH 11,6*		570482	377,00	
	TH 18 S (PR-2B)**	Z8	574786 R	252,00			TH 16*		570460	377,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00			System TH	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00				ClouSet	TH 16*		570460
	TH 32 S (PR-2B)	Z8	574798 R	277,00			TH 18*			570465	377,00
	U 16*		570765	353,00			TH 20*			570470	377,00
	U 18*		570770	353,00			TH 16 S (PR-2B)**		Z8	574782 R	252,00
	U 20*		570775	353,00			TH 18 S (PR-2B)**		Z8	574786 R	252,00
	U 26* ¹²⁾		570750	414,00			TH 20 S (PR-2B)**		Z8	574788 R	252,00
	U 32		570785	414,00			Comap PEX Press		RFz 12*		571320
C					RFz 16*				571325	393,00	
Cello Products -B- Press	VUS ½" (OD 15,9 mm)		571770	378,00	RFz 20*			571330	393,00		
	VUS ¾" (OD 22,2 mm)		571775	378,00	RFz 25			571335	393,00		
	VUS 1" (OD 28,6 mm)		571780	378,00	Comap Multiskin	TH 14*			570455	377,00	
	VUS 1¼" (OD 34,9 mm)		571785	378,00		TH 16*			570460	377,00	
	VUS 1½" (OD 41,3 mm)		571790	729,00		TH 18*		570465	377,00		
VUS 2" (OD 54,0 mm)		571795	750,00	TH 20*			570470	377,00			
CGR DYNAFLU multicouche	H 16*		570320	340,00		TH 26*		570475	377,00		
	H 20*		570350	340,00		TH 32		570480	377,00		
	H 26*		570370	340,00	THL 32		570487	377,00			
	H 32		570380	340,00	TH 40		570485	500,00			
	TH 16*		570460	377,00	TH 50 (PZ-S)		572400	1.310,00			
	TH 20*		570470	377,00	TH 63 (PZ-S)		572405	1.310,00			
	TH 26*		570475	377,00	THz 75 (PR-3B)	Z4	572829 R	1.240,00			
	TH 32		570480	377,00	TH 16 S (PR-2B)**	Z8	574782 R	252,00			
	TH 40		570485	500,00	TH 20 S (PR-2B)**	Z8	574788 R	252,00			
	TH 50 (PZ-S)		572400	1.310,00	TH 26 S (PR-2B)**	Z8	574794 R	252,00			
	TH 63 (PZ-S)		572405	1.310,00	TH 32 S (PR-2B)	Z8	574798 R	277,00			
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	U 14*		570760	353,00			
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	U 16*		570765	353,00			
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	U 18*		570770	353,00			
	TH 32 S (PR-2B)	Z8	574798 R	277,00	U 20*		570775	353,00			
	U 16*		570765	353,00	U 32		570785	414,00			
	U 20*		570775	353,00	U 40		570790	504,00			
	U 26* ¹²⁾		570750	414,00	U 50		570795	605,00			
	U 32		570785	414,00	U 63 (PR-3B)	Z4	572837 R	1.490,00			
	U 40		570790	504,00	U 63 (PZ-S)		572365	1.310,00			
U 50		570795	605,00	U 75 (PR-3B)	Z4	572828 R	1.310,00				
U 63 (PR-3B)	Z4	572837 R	1.490,00	H 14*		570310	340,00				
U 63 (PZ-S)		572365	1.310,00	H 16*		570320	340,00				
CGR DYNAFLU PER	H 12*		570300	340,00	H 18*		570340	340,00			
	H 16*		570320	340,00	H 20*		570350	340,00			
	H 20*		570350	340,00	H 26*		570370	340,00			
	H 25*		570360	340,00	H 32		570380	340,00			
	RFz 12*		571320	393,00	H 40 (PZ-4G)		570390	1.150,00			
	RFz 16*		571325	393,00							
	RFz 20*		571330	393,00							
	RFz 25		571335	393,00							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
Comap Multiskin Gas	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	THL 32		570487	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 32		570785	414,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	COMISA Press System	TH 14*		570455	377,00
	TH 16*		570460	377,00	
	TH 18*		570465	377,00	
	TH 20*		570470	377,00	
TH 25*		570495	377,00		
TH 26*		570475	377,00		
TH 32		570480	377,00		
TH 40		570485	500,00		
TH 50 (PZ-S)		572400	1.310,00		
TH 63 (PZ-S)		572405	1.310,00		
TH 16 S (PR-2B)**	Z8	574782 R	252,00		
TH 18 S (PR-2B)**	Z8	574786 R	252,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 25 S (PR-2B)**	Z8	574792 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00		
H 14*		570310	340,00		
H 16*		570320	340,00		
H 18*		570340	340,00		
H 20*		570350	340,00		
H 26*		570370	340,00		
H 32		570380	340,00		
B 14*		570845	412,00		
B 16*		570850	412,00		
B 18*		570855	412,00		
B 20*		570860	412,00		
B 26		570870	454,00		
B 32		570880	454,00		
COMISA Press System Gas	TH 16*		570460	377,00	
TH 20*		570470	377,00		
TH 26*		570475	377,00		
TH 32		570480	377,00		
TH 16 S (PR-2B)**	Z8	574782 R	252,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00		
CONEL CONNECT INOX	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	V 15		570115	313,00	
	V 18		570125	313,00	
	V 22		570135	313,00	
	V 42 (PR-2B)	Z2	572850 R	653,00	
	V 54 (PR-2B)	Z2	572851 R	706,00	
CONEL CONNECT MULTI	F 16*		570717	359,00	
	F 20*		570727	359,00	
	F 26*		570730	389,00	
	F 32		570735	389,00	
	F 16 S (PR-2B)**	Z8	574728 R	252,00	
	F 20 S (PR-2B)**	Z8	574730 R	252,00	
	F 26 S (PR-2B)**	Z8	574732 R	252,00	
	F 32 S (PR-2B)**	Z8	574734 R	277,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)**	Z8	574798 R	277,00	
(DN 26)	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	VP 16*		570910	376,00	
	VP 20*		570915	376,00	
	VP 32		570925	416,00	
	CONEL CONNECT MV2	F 16*		570717	359,00
		F 20*		570727	359,00
		F 26*		570730	389,00
F 32			570735	389,00	
F 16 S (PR-2B)**		Z8	574728 R	252,00	
F 20 S (PR-2B)**		Z8	574730 R	252,00	
F 26 S (PR-2B)**		Z8	574732 R	252,00	
F 32 S (PR-2B)**		Z8	574734 R	277,00	
TH 16*			570460	377,00	
TH 20*			570470	377,00	
TH 26*		570475	377,00		
TH 32		570480	377,00		
TH 16 S (PR-2B)**	Z8	574782 R	252,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TH 32 S (PR-2B)**	Z8	574798 R	277,00		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
Conex Bänninger <A> Press Inox (304)	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 35 (PR-3S)	Z2	572727 R	1.370,00
	M 42 (PZ-46)		570160	1.010,00
	M 54 (PZ-46)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
M 22 S (PR-2B)	Z8	574742 R	252,00	
M 28 S (PR-2B)	Z8	574744 R	252,00	
M 35 S (PR-2B)	Z8	574746 R	277,00	
Conex Bänninger <A> Press Inox (316L)	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 35 (PR-3S)	Z2	572727 R	1.370,00
	M 42 (PZ-46)		570160	1.010,00
	M 54 (PZ-46)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
M 22 S (PR-2B)	Z8	574742 R	252,00	
M 28 S (PR-2B)	Z8	574744 R	252,00	
M 35 S (PR-2B)	Z8	574746 R	277,00	
Conex Bänninger >B< Flex	F 16*		570717	359,00
	F 18*		570720	359,00
	F 20*		570727	359,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 32 S (PR-2B)	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 32		570380	340,00
	Rfz 16*		571325	393,00
	Rfz 18*		571327	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	Rfz 32		571340	393,00
	TH 16*		570460	377,00
TH 18*		570465	377,00	
TH 20*		570470	377,00	
TH 25*		570495	377,00	
TH 32		570480	377,00	
TH 16 S (PR-2B)**	Z8	574782 R	252,00	
TH 18 S (PR-2B)**	Z8	574786 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
U 16*		570765	353,00	
U 18*		570770	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 32		570785	414,00	
Conex Bänninger >B< Flex Gas	F 16*		570717	359,00
	F 18*		570720	359,00
	F 20*		570727	359,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 32 S (PR-2B)	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 32		570380	340,00
	Rfz 16*		571325	393,00
	Rfz 18*		571327	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	Rfz 32		571340	393,00
	TH 16*		570460	377,00
TH 18*		570465	377,00	
TH 20*		570470	377,00	
TH 25*		570495	377,00	
TH 32		570480	377,00	
TH 16 S (PR-2B)**	Z8	574782 R	252,00	
TH 18 S (PR-2B)**	Z8	574786 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
U 16*		570765	353,00	
U 18*		570770	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 32		570785	414,00	
Conex Bänninger >B< MaxiPro	BMP ¼"		571700 R	374,00
	BMP ⅜"		571702 R	374,00
	BMP ½"		571704 R	374,00
	BMP ⅝"		571706 R	374,00
	BMP ¾"		571708 R	374,00
	BMP 1"		571710 R	374,00
	BMP 1 1/8"		571712 R	374,00
	BMP 1 1/4"		571714 R	374,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM					
Conex Bänninger >B< Press	V 12		570107	313,00	Conex Bänninger >B< Press XL stainless	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00					
	V 14		570112	313,00		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00					
	V 15		570115	313,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00					
	V 16		570117	313,00		CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	2.750,00					
	V 18		570125	313,00		CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	2.750,00					
	V 22		570135	313,00		Conex Bänninger >B< Press Solar	V 12		570107	313,00				
	V 28		570145	313,00			V 14		570112	313,00				
	V 35		570155	313,00			V 15		570115	313,00				
	V 42		570165	729,00			V 16		570117	313,00				
	V 54		570175	750,00			V 18		570125	313,00				
	V 12 S (PR-2B)	Z8	574748 R	252,00			V 22		570135	313,00				
	V 14 S (PR-2B)	Z8	574800 R	252,00			V 28		570145	313,00				
	V 15 S (PR-2B)	Z8	574752 R	252,00			V 35		570155	313,00				
	V 16 S (PR-2B)	Z8	574802 R	252,00			V 42		570165	729,00				
	V 18 S (PR-2B)	Z8	574756 R	252,00			V 54		570175	750,00				
	V 22 S (PR-2B)	Z8	574758 R	252,00			V 12 S (PR-2B)	Z8	574748 R	252,00				
	V 28 S (PR-2B)	Z8	574760 R	252,00		V 14 S (PR-2B)	Z8	574800 R	252,00					
	V 35 S (PR-2B)	Z8	574762 R	277,00		V 15 S (PR-2B)	Z8	574752 R	252,00					
	M 15		570110	313,00		V 16 S (PR-2B)	Z8	574802 R	252,00					
	M 22		570130	313,00		V 18 S (PR-2B)	Z8	574756 R	252,00					
	M 28		570140	313,00		V 22 S (PR-2B)	Z8	574758 R	252,00					
						V 28 S (PR-2B)	Z8	574760 R	252,00					
						V 35 S (PR-2B)	Z8	574762 R	277,00					
Conex Bänninger >B< Press XL copper	VFz 64,0 (PR-3B)	Z5	572815 R	1.240,00	D									
	CBVFz 66,7 (PR-3B)	Z5	572847 R	1.240,00										
	VFz 76,1 (PR-3B) ¹⁾	Z5	572816 R	1.240,00										
	VFz 88,9 (PR-3B) ¹⁾	Z5	572817 R	1.310,00										
	VFz 108,0 (PR-3B) ¹⁾	Z5	572818 R	1.310,00										
Conex Bänninger >B< Press carbon	V 15		570115	313,00						Debrunner Acifer	M 12		570100	313,00
	V 18		570125	313,00						d-a Presssystem	M 15		570110	313,00
	V 22		570135	313,00						C-Stahl	M 18		570120	313,00
	V 28		570145	313,00							M 22		570130	313,00
	V 35		570155	313,00							M 28		570140	313,00
	V 42		570165	729,00							M 35		570150	313,00
	V 42 (PR-2B)	Z2	572850 R	653,00							M 42 (PR-3S)	Z2	572706 R	1.370,00
	V 54		570175	750,00							M 54 (PR-3S)	Z2	572708 R	1.370,00
	V 54 (PR-2B)	Z2	572851 R	706,00							M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	V 15 S (PR-2B)	Z8	574752 R	252,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00					
	V 18 S (PR-2B)	Z8	574756 R	252,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00					
	V 22 S (PR-2B)	Z8	574758 R	252,00		M 12 S (PR-2B)	Z8	574736 R	252,00					
	V 28 S (PR-2B)	Z8	574760 R	252,00		M 15 S (PR-2B)	Z8	574738 R	252,00					
V 35 S (PR-2B)	Z8	574762 R	277,00		M 18 S (PR-2B)	Z8	574740 R	252,00						
Conex Bänninger >B< Press XL carbon	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00		M 22 S (PR-2B)	Z8	574742 R	252,00					
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00		M 28 S (PR-2B)	Z8	574744 R	252,00					
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		M 35 S (PR-2B)	Z8	574746 R	277,00					
	CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	2.750,00	DUOPIPE SYSTEMS	U 16*		570765	353,00					
	CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	2.750,00	DUOFIL MKSYSTEM	U 18*		570770	353,00					
Conex Bänninger >B< Press Gas	V 12		570107	313,00		U 20*		570775	353,00					
	V 14		570112	313,00		U 25*		570780	353,00					
	V 15		570115	313,00		U 32		570785	414,00					
	V 16		570117	313,00	DW Verbundrohr multitubo systems	U 16*		570765	353,00					
	V 18		570125	313,00		U 18*		570770	353,00					
	V 22		570135	313,00		U 20*		570775	353,00					
	V 28		570145	313,00		U 25*		570780	353,00					
	V 35		570155	313,00		U 32		570785	414,00					
	V 42		570165	729,00		U 40		570790	504,00					
	V 54		570175	750,00		U 50		570795	605,00					
	V 12 S (PR-2B)	Z8	574748 R	252,00	U 63 (PR-3B)	Z4	572837 R	1.490,00						
	V 14 S (PR-2B)	Z8	574800 R	252,00	U 63 (PZ-S)		572365	1.310,00						
	V 15 S (PR-2B)	Z8	574752 R	252,00	U 75 (PR-3B)	Z4	572828 R	1.310,00						
	V 16 S (PR-2B)	Z8	574802 R	252,00	E									
	V 18 S (PR-2B)	Z8	574756 R	252,00										
	V 22 S (PR-2B)	Z8	574758 R	252,00										
	V 28 S (PR-2B)	Z8	574760 R	252,00										
V 35 S (PR-2B)	Z8	574762 R	277,00											
Conex Bänninger >B< Press Inox	V 15		570115	313,00						EBRILLE	U 16*		570765	353,00
	V 18		570125	313,00						Isomonflex	U 20*		570775	353,00
	V 22		570135	313,00							U 25*		570780	353,00
	V 28		570145	313,00							H 26*		570370	340,00
	V 35		570155	313,00							TH 26*		570475	377,00
	V 42		570165	729,00							TH 26 S (PR-2B)**	Z8	574794 R	252,00
	V 42 (PR-2B)	Z2	572850 R	653,00							U 32		570785	414,00
	V 54		570175	750,00						EBRILLE	U 16*		570765	353,00
	V 54 (PR-2B)	Z2	572851 R	706,00						Monflex	U 20*		570775	353,00
	V 15 S (PR-2B)	Z8	574752 R	252,00		U 25*		570780	353,00					
	V 18 S (PR-2B)	Z8	574756 R	252,00		H 26*		570370	340,00					
	V 22 S (PR-2B)	Z8	574758 R	252,00		TH 26*		570475	377,00					
	V 28 S (PR-2B)	Z8	574760 R	252,00		TH 26 S (PR-2B)**	Z8	574794 R	252,00					
V 35 S (PR-2B)	Z8	574762 R	277,00		U 32		570785	414,00						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
EFFEBI	M 15		570110	313,00
EFFEBI-PRESS	M 18		570120	313,00
Aisi316	M 22		570130	313,00
System M Profile ¹⁾	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S) ⁵⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
EFFEBI	V 12		570107	313,00
EFFEBI-PRESS	V 15		570115	313,00
Aisi316	V 18		570125	313,00
System V Profile	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
EFFEBI	M 12		570100	313,00
EFFEBI-PRESS	M 15		570110	313,00
Carbon-S	M 18		570120	313,00
System M Profile ¹⁾	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 12 S (PR-2B)	Z8	574736 R	252,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
EFFEBI	V 12		570107	313,00
EFFEBI-PRESS	V 15		570115	313,00
Carbon-S	V 18		570125	313,00
System V Profile	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
EFFEBI	V 12		570107	313,00
EFFEBI-PRESS	V 14		570112	313,00
COPPER	V 15		570115	313,00
	V 16		570117	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 14 S (PR-2B)	Z8	574800 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 16 S (PR-2B)	Z8	574802 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
EFFEBI	V 12		570107	313,00
EFFEBI-PRESS	V 15		570115	313,00
UNICO	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
EFFEBI	V 12		570107	313,00
EFFEBI-PRESS	V 15		570115	313,00
UNICO (GAS)	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
EFFEBI	M 15		570110	313,00
PRESSTIGE	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
EFFEBI	M 15		570110	313,00
PRESSTIGE 4E05	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
EFFEBI	M 15		570110	313,00
PRESSTIGE-GAS	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
EFFEBI	TH 16*		570460	377,00
TOF-GAS	TH 20*		570470	377,00
MULTIPINZA	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 32		570785	414,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM
EFFEBI	TH 16*		570460	377,00
	TH 18*		570465	377,00
TOF	TH 20*		570470	377,00
	TH 25*		570495	377,00
MULTIPINZA	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	F 16*		570717	359,00
	F 18*		570720	359,00
	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	Fz 40		570742	416,00
	Fz 50		570747	630,00
	F 63 (PZ-S)		572385	1.310,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 24 S (PR-2B)**	Z8	574732 R	252,00
	F 32 S (PR-2B)	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 26* ¹²⁾		570750	414,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PZ-S)		572365	1.310,00
	B 16*		570850	412,00
	B 18*		570855	412,00
	B 20*		570860	412,00
	B 26		570870	454,00
	B 32		570880	454,00
EFIELD MULTILAYER PRESS DINGAS	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
EFIELD MULTILAYER PRESS WATER	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
Elkhart	VUS ½" (OD 15,9 mm)		571770	378,00
APOLLOXPRESS	VUS ¾" (OD 22,2 mm)		571775	378,00
Fittings Copper	VUS 1" (OD 28,6 mm)		571780	378,00
and Low-Lead	VUS 1¼" (OD 34,9 mm)		571785	378,00
Brass	VUS 1½" (OD 41,3 mm)		571790	729,00
	VUS 2" (OD 54,0 mm)		571795	750,00
Elkhart	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	1.240,00
APOLLOXPRESS	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	1.240,00
LD-C Fittings	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	1.310,00
Copper				

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	
EMMETI GERPEX- FIVPRESS	B 16*		570850	412,00	
	B 20*		570860	412,00	
	B 26		570870	454,00	
	B 32		570880	454,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 20*		570775	353,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 15 S (PR-2B)**	Z8	574780 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 17 S (PR-2B)**	Z8	574784 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 25 S (PR-2B)**	Z8	574792 R	252,00		
EMPUR	TH 14*		570455	377,00	
	TH 15*		570457	377,00	
	TH 16*		570460	377,00	
	TH 17*		570462	377,00	
	TH 20*		570470	377,00	
	TH 25*		570495	377,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 15 S (PR-2B)**	Z8	574780 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 17 S (PR-2B)**	Z8	574784 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 25 S (PR-2B)**	Z8	574792 R	252,00	
	Esta Rohr simplesta SH M	M 15		570110	313,00
		M 18		570120	313,00
		M 22		570130	313,00
		M 28		570140	313,00
		M 35		570150	313,00
		M 42 (PZ-4G)		570160	1.010,00
		M 54 (PZ-4G)		570170	1.010,00
		M 42 (PR-3S)	Z2	572706 R	1.370,00
M 54 (PR-3S)		Z2	572708 R	1.370,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
M 108,0 G XL (PR-3S) ⁸⁾		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
M 15 S (PR-2B)		Z8	574738 R	252,00	
M 18 S (PR-2B)		Z8	574740 R	252,00	
M 22 S (PR-2B)		Z8	574742 R	252,00	
M 28 S (PR-2B)		Z8	574744 R	252,00	
M 35 S (PR-2B)		Z8	574746 R	277,00	
Esta Rohr simplesta ST M		M 15		570110	313,00
		M 18		570120	313,00
		M 22		570130	313,00
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PZ-4G)		570160	1.010,00	
	M 54 (PZ-4G)		570170	1.010,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		570100	313,00	
	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
M 12 S (PR-2B)	Z8	574736 R	252,00		
M 15 S (PR-2B)	Z8	574738 R	252,00		
M 18 S (PR-2B)	Z8	574740 R	252,00		
M 22 S (PR-2B)	Z8	574742 R	252,00		
M 28 S (PR-2B)	Z8	574744 R	252,00		
M 35 S (PR-2B)	Z8	574746 R	277,00		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
EUROTUBI	M 15		570110	313,00
EUROPA	M 18		570120	313,00
Inox Pressfitting	M 22		570130	313,00
System M-Profile ¹⁾	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
Evans	VAU 15 (½") (OD 12,7 mm)		572687	324,00
Components	VAU 20 (¾") (OD 19,1 mm)		572689	324,00
Presslok	VAU 25 (1") (OD 25,4 mm)		572691	324,00
	ECI 1½"		571932	405,00
	ECI 2" (PZ-4G)		571934	1.010,00
	ECI 2½" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104 R	2.140,00
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105 R	2.350,00
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106 R	2.750,00
F				
FAR Rubinetterie	TH 14*		570455	377,00
PRESSFAR	TH 16*		570460	377,00
	TH 17*		570462	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 14 S (PR-2B)**	Z8	574778 R	252,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 17 S (PR-2B)**	Z8	574784 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	H 14*		570310	340,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	U 14*		570760	353,00
	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PZ-S)		572365	1.310,00
F.B.Q. BARONIO	V 12		570107	313,00
BQ PRESS SOLAR	V 14		570112	313,00
	V 15		570115	313,00
	V 16		570117	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 14 S (PR-2B)	Z8	574800 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	VG 16 S (PR-2B)	Z8	574754 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
F.B.Q. BARONIO	V 12		570107	313,00
BQ PRESS WATER	V 14		570112	313,00
	V 15		570115	313,00
	V 16		570117	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 14 S (PR-2B)	Z8	574800 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	VG 16 S (PR-2B)	Z8	574754 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
F.B.Q. BARONIO	V 12		570107	313,00
BQ PRESS GAS	V 14		570112	313,00
	V 15		570115	313,00
	V 16		570117	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	VG 16 S (PR-2B)	Z8	574754 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
FERCOFLOOR	RfZ 16*		571325	393,00
DUO Press	RfZ 20*		571330	393,00
FERCO PEX	RfZ 25		571335	393,00
	RfZ 32		571340	393,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
FERCOFLOOR	RfZ 16*		571325	393,00
DUO Press	RfZ 20*		571330	393,00
MULTIFER	RfZ 25		571335	393,00
	RfZ 32		571340	393,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
FERRO systems	TH 16*		570460	377,00
BRASELLI	TH 20*		570470	377,00
GPF GAS	TH 25*		570495	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
FERRO systems	U 16*		570765	353,00
BRASELLI	U 18*		570770	353,00
GPF MULT	U 20*		570775	353,00
Pressfitting	U 25*		570780	353,00
MULTICAPA	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
FERRO systems	U 16*		570765	353,00
BRASELLI	U 18*		570770	353,00
GPF PPSU	U 20*		570775	353,00
Pressfitting	U 25*		570780	353,00
PEX y MULTICAPA	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
FERRO systems	RfZ 16*		571325	393,00
BRASELLI	RfZ 20*		571330	393,00
GPF PRESS	RfZ 25		571335	393,00
Pressfitting PEX	RfZ 32		571340	393,00
FILINOX	FTB 15		571432	454,00
Filpress	FTB 18		571434	454,00
	FTB 22		571436	454,00
	FTB 28		571438	454,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM		
FILINOX Instalpress Steel	M 15		570110	313,00	FORZA WATER CRIMP (AUS)	K16/P18*		572600	393,00		
	M 18		570120	313,00		K/20*		572605	393,00		
	M 22		570130	313,00		K/25*		572610	393,00		
	M 28		570140	313,00		K32		572615	393,00		
	M 35		570150	313,00		K1/40		572620	393,00		
	M 42 (PR-3S)	Z2	572706 R	1.370,00		K1/50		572625	645,00		
	M 54 (PR-3S)	Z2	572708 R	1.370,00		FORZA STAINLESS WATER CRIMP	K16/P18*		572600	393,00	
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00			K/20*		572605	393,00	
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00		FORZA	U 16*		570765	353,00	
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00		STESSO PEX	U 20*		570775	353,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00		WATER AND GAS	U 25*		570780	353,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00		CRIMP	U 32		570785	414,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00		(AUS)	U 40		570790	504,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00		U 50		570795	605,00		
	M 35 S (PR-2B)	Z8	574746 R	277,00		U 63 (PZ-S)		572365	1.310,00		
	FILINOX Instalpress Inox	M 15		570110		313,00	FORZA GAS CRIMP (AUS)	K16/P18*		572600	393,00
		M 18		570120		313,00		K/20*		572605	393,00
M 22			570130	313,00	K/25*			572610	393,00		
M 28			570140	313,00	K32			572615	393,00		
M 35			570150	313,00	K1/40			572620	393,00		
M 42 (PR-3S)		Z2	572706 R	1.370,00	K1/50			572625	645,00		
M 54 (PR-3S)		Z2	572708 R	1.370,00	FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)			572687	324,00	
M 76,1 XL (PR-3S)		Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00		VAU 20 (OD 19,1 mm)			572689	324,00	
M 88,9 G XL (PR-3S)		Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00	VAU 25 (OD 25,4 mm)			572691	324,00		
M 108,0 G XL (PR-3S)		Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00	VAU 32 (OD 31,8 mm)			572693	340,00		
M 15 S (PR-2B)		Z8	574738 R	252,00	VAU 40 (OD 38,1 mm)			572695	504,00		
M 18 S (PR-2B)		Z8	574740 R	252,00	VAU 50 (OD 50,8 mm)			572697	892,00		
M 22 S (PR-2B)		Z8	574742 R	252,00	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5		572839 R	1.240,00		
M 28 S (PR-2B)		Z8	574744 R	252,00	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5		572840 R	1.240,00		
M 35 S (PR-2B)		Z8	574746 R	277,00	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5		572841 R	1.310,00		
FITTINGS ESTÁNDAR ECO-PRESS		RFz 16*		571325	393,00	VAU 15 S (PR-2B) (OD 12,7 mm)		Z8	574804 R	252,00	
		RFz 20*		571330	393,00	VAU 20 S (PR-2B)** (OD 19,1 mm)		Z8	574806 R	252,00	
	RFz 25		571335	393,00	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	277,00			
	RFz 32		571340	393,00	FORZA STAINLESS V PRESS (AUS)	V 15		570115	313,00		
	RFz 16*		571325	393,00		V 22		570135	313,00		
	RFz 18*		571327	393,00		V 28		570145	313,00		
RFz 20*		571330	393,00	V 35			570155	313,00			
RFz 25		571335	393,00	V 42			570165	729,00			
RFz 32		571340	393,00	V 54			570175	750,00			
FITTINGS ESTÁNDAR PE-X	RFz 16*		571325	393,00	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00			
	RFz 20*		571330	393,00	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00			
	RFz 25		571335	393,00	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00			
	RFz 32		571340	393,00	V 15 S (PR-2B)	Z8	574752 R	252,00			
	FORNARA ForPress	B 16*		570850	412,00	V 22 S (PR-2B)	Z8	574758 R	252,00		
		B 20*		570860	412,00	V 28 S (PR-2B)	Z8	574760 R	252,00		
B 26			570870	454,00	V 35 S (PR-2B)	Z8	574762 R	277,00			
B 32			570880	454,00	FRABO FRABOPRESS 316 GAS M	M 15		570110	313,00		
F 16*			570717	359,00		M 18		570120	313,00		
F 20*			570727	359,00		M 22		570130	313,00		
F 26*			570730	389,00		M 28		570140	313,00		
F 32			570735	389,00		M 35		570150	313,00		
F 16 S (PR-2B)**		Z8	574728 R	252,00		M 42 (PR-3S)	Z2	572706 R	1.370,00		
F 20 S (PR-2B)**		Z8	574730 R	252,00		M 54 (PR-3S)	Z2	572708 R	1.370,00		
F 26 S (PR-2B)**		Z8	574732 R	252,00		M 15 S (PR-2B)	Z8	574738 R	252,00		
F 32 S (PR-2B)		Z8	574734 R	277,00		M 18 S (PR-2B)	Z1	574740 R	252,00		
H 16*			570320	340,00		M 22 S (PR-2B)	Z8	574742 R	252,00		
H 20*			570350	340,00		M 28 S (PR-2B)	Z8	574744 R	252,00		
H 26*			570370	340,00		M 35 S (PR-2B)	Z8	574746 R	277,00		
H 32			570380	340,00		FRABO FRABOPRESS 316 GAS V	V 15		570115	313,00	
TH 16*			570460	377,00			V 18		570125	313,00	
TH 20*		570470	377,00	V 22				570135	313,00		
TH 26*		570475	377,00	V 28				570145	313,00		
TH 32		570480	377,00	V 35				570155	313,00		
TH 16 S (PR-2B)**	Z8	574782 R	252,00	V 42			570165	729,00			
TH 20 S (PR-2B)**	Z8	574788 R	252,00	V 42 (PR-2B)	Z2		572850 R	653,00			
TH 26 S (PR-2B)**	Z8	574794 R	252,00	V 54			570175	750,00			
TH 32 S (PR-2B)	Z8	574798 R	277,00	V 54 (PR-2B)	Z2		572851 R	706,00			
U 16*		570765	353,00	V 15 S (PR-2B)	Z8		574752 R	252,00			
U 20*		570775	353,00	V 18 S (PR-2B)	Z8		574756 R	252,00			
U 26* ⁽¹²⁾		570750	414,00	V 22 S (PR-2B)	Z8		574758 R	252,00			
U 32		570785	414,00	V 28 S (PR-2B)	Z8		574760 R	252,00			
				V 35 S (PR-2B)	Z8		574762 R	277,00			

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
FRABO	M 15		570110	313,00
FRABOPRESS	M 18		570120	313,00
316 M	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 66,7 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579107 R	2.350,00
	M 76,1 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
FRABO	V 15		570115	313,00
FRABOPRESS	V 18		570125	313,00
316 V	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
FRABO	V 12		570107	313,00
FRABOPRESS	V 15		570115	313,00
CHROME	V 18		570125	313,00
	V 22		570135	313,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
FRABO	M 15		570110	313,00
FRABOPRESS	M 18		570120	313,00
C-STEEL M	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 66,7 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579107 R	2.350,00
	M 76,1 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
FRABO	V 12		570107	313,00
FRABOPRESS	V 15		570115	313,00
C-STEEL V	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
FRABO	M 12		570100	313,00
FRABOPRESS	M 15		570110	313,00
GAS M	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 12 S (PR-2B)	Z8	574736 R	252,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
FRABO	V 12		570107	313,00
FRABOPRESS	V 15		570115	313,00
GAS V	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
FRABO	V 12		570107	313,00
FRABOPRESS	V 15		570115	313,00
KOMBI	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	M 66,7 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579107 R	2.350,00
	M 76,1 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579111 R	2.750,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
FRABO	M 12		570100	313,00
FRABOPRESS M	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 66,7 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579107 R	2.350,00
	M 76,1 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579111 R	2.750,00
	M 12 S (PR-2B)	Z8	574736 R	252,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
FRABO	V 15		570115	313,00
FRABOPRESS	V 18		570125	313,00
SOLAR	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
FRABO	V 12		570107	313,00
FRABOPRESS V	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
Fränkische	F 16*		570717	359,00
alpex-duo XS	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
	F 32 S (PR-2B)**	Z8	574734 R	277,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)**	Z8	574798 R	277,00
Fränkische	F 16*		570717	359,00
alpex F50 PROF1	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
	F 32 S (PR-2B)**	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)**	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
(DN 26)	U 25*		570780	353,00
	U 32		570785	414,00
	VP 16*		570910	376,00
	VP 20*		570915	376,00
	VP 32		570925	416,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	
Fränkische alpeX L	Fz 40		570742	416,00	
	Fz 50		570747	630,00	
	F 63 (PZ-S)		572385	1.310,00	
	Fz 75 (PR-3B)	Z4	572830 R	1.240,00	
G					
gabotherm H+S	TH 10*		570467	377,00	
	TH 12*		570452	377,00	
	TH 14*		570455	377,00	
	TH 15*		570457	377,00	
	TH 16*		570460	377,00	
	TH 17*		570462	377,00	
	TH 18*		570465	377,00	
	TH 20*		570470	377,00	
	TH 25*		570495	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 10 S (PR-2B)**	Z8	574772 R	252,00	
	TH 12 S (PR-2B)**	Z8	574776 R	252,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 15 S (PR-2B)**	Z8	574780 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 17 S (PR-2B)**	Z8	574784 R	252,00	
	TH 18 S (PR-2B)**	Z8	574786 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 25 S (PR-2B)**	Z8	574792 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	Gallagher USA YogaPipe ACR	H 12" (¾")		570300	340,00
		U 14" (¾")		570760	353,00
		U 16" (½")		570765	353,00
		U 18" (¾")		570770	353,00
		U 20" (¾")		570775	353,00
		U 25" (¾")		570780	353,00
		U 32 (1½")		570785	414,00
		Geberit Mapress C-STAHl	M 12		570100
M 15			570110	313,00	
M 18			570120	313,00	
M 22			570130	313,00	
M 28			570140	313,00	
M 35			570150	313,00	
M 35 (PR-3S)	Z2		572727 R	1.370,00	
M 42 (PZ-4G)			570160	1.010,00	
M 54 (PZ-4G)			570170	1.010,00	
M 42 (PR-3S)	Z2		572706 R	1.370,00	
M 54 (PR-3S)	Z2		572708 R	1.370,00	
M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579107 R	2.350,00	
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101 R	2.350,00	
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110 R	2.750,00	
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579111 R	2.750,00	
M 12 S (PR-2B)	Z8		574736 R	252,00	
M 15 S (PR-2B)	Z8		574738 R	252,00	
M 18 S (PR-2B)	Z8		574740 R	252,00	
M 22 S (PR-2B)	Z8		574742 R	252,00	
M 28 S (PR-2B)	Z8		574744 R	252,00	
M 35 S (PR-2B)	Z8		574746 R	277,00	
Geberit Mapress C-STAHl	M 22			570130	313,00
	M 28			570140	313,00
Sprinkler nass	M 35 (PR-3S)	Z2	572727 R	1.370,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	
Geberit Mapress Edelstahl	M 12		570100	313,00	
	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 35 (PR-3S)	Z2	572727 R	1.370,00	
	M 42 (PZ-4G)		570160	1.010,00	
	M 54 (PZ-4G)		570170	1.010,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 12 S (PR-2B)	Z8	574736 R	252,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
	Geberit Mapress Edelstahl Gas	M 15		570110	313,00
		M 18		570120	313,00
		M 22		570130	313,00
M 28			570140	313,00	
M 35			570150	313,00	
M 35 (PR-3S)		Z2	572727 R	1.370,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00	
M 88,9 G XL (PR-3S) ⁷⁾		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
Geberit Mapress Edelstahl Sprinkler	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35 (PR-3S)	Z2	572727 R	1.370,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	Geberit Mapress Kupfer	M 12		570100	313,00
M 15			570110	313,00	
M 18			570120	313,00	
M 22			570130	313,00	
M 28			570140	313,00	
M 35			570150	313,00	
M 35 (PR-3S)		Z2	572727 R	1.370,00	
M 42 (PZ-4G)			570160	1.010,00	
M 54 (PZ-4G)			570170	1.010,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00	
Geberit Mapress Kupfer Gas	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 35 (PR-3S)	Z2	572727 R	1.370,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
Geberit Mepla	G 16*		570400	378,00
	G 20*		570410	378,00
	G 26*		570420	401,00
	G 32		570430	429,00
	G 40		570440	555,00
	G 50		570450	580,00
	G 63 (PZ-S)		572470	1.640,00
Geberit Mepla Therm	G 16*		570400	378,00
	G 20*		570410	378,00
	G 26*		570420	401,00
Geberit Volex	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
General Fittings 5T00	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 63 (PZ-S)		572365	1.310,00
U 63 (PR-3B)	Z4	572837 R	1.490,00	
General Fittings Ewoprex	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 63 (PZ-S)		572365	1.310,00
U 63 (PR-3B)	Z4	572837 R	1.490,00	
General Fittings Serie 5S00	B 16*		570850	412,00
	B 18*		570855	412,00
	B 20*		570860	412,00
	B 26		570870	454,00
	B 32		570880	454,00
	F 16*		570717	359,00
	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
	F 32 S (PR-2B)	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
TH 18 S (PR-2B)**	Z8	574786 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
U 16*		570765	353,00	
U 18*		570770	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 32		570785	414,00	
U 40		570790	504,00	
U 63 (PZ-S)		572365	1.310,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
General Fittings Trident	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 32		570785	414,00	
General Fittings Trident Gas	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 32		570785	414,00	
	Giacomini Raccordi RM Giacomini	H 16*		570320	340,00
H 20*			570350	340,00	
H 26*			570370	340,00	
H 32			570380	340,00	
TH 16*			570460	377,00	
TH 20*			570470	377,00	
TH 26*			570475	377,00	
TH 32			570480	377,00	
TH 40			570485	500,00	
TH 50 (PZ-S)			572400	1.310,00	
TH 63 (PZ-S)			572405	1.310,00	
U 16*			570765	353,00	
U 20*			570775	353,00	
U 32			570785	414,00	
U 40			570790	504,00	
U 50		570795	605,00		
Giacomini RM MULTIGAS	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	Giacomini Valvole Giacomini serie R850V	V 15		570115	313,00
		V 18		570125	313,00
V 22			570135	313,00	
V 28			570145	313,00	
V 35			570155	313,00	
V 42			570165	729,00	
V 54			570175	750,00	
V 15 S (PR-2B)		Z8	574752 R	252,00	
V 18 S (PR-2B)		Z8	574756 R	252,00	
V 22 S (PR-2B)		Z8	574758 R	252,00	
V 28 S (PR-2B)		Z8	574760 R	252,00	
V 35 S (PR-2B)		Z8	574762 R	277,00	
SA 15			570935	376,00	
SA 18			570940	376,00	
SA 22			570945	376,00	
SA 28		570950	376,00		
SA 35		570955	376,00		
M 15		570110	313,00		
M 18		570120	313,00		
M 22		570130	313,00		
M 28		570140	313,00		
M 35		570150	313,00		
M 15 S (PR-2B)	Z8	574738 R	252,00		
M 18 S (PR-2B)	Z8	574740 R	252,00		
M 22 S (PR-2B)	Z8	574742 R	252,00		
M 28 S (PR-2B)	Z8	574744 R	252,00		
M 35 S (PR-2B)	Z8	574746 R	277,00		
Golan Pipe Systems (Scandinavia) Alu-Pres	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
U 50		570795	605,00		
U 63 (PZ-S)		572365	1.310,00		
U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 75 (PR-3B)	Z4	572828 R	1.310,00		
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770	378,00	
	VUS ¾" (OD 22,2 mm)		571775	378,00	
	VUS 1" (OD 28,6 mm)		571780	378,00	
	VUS 1¼" (OD 34,9 mm)		571785	378,00	
	VUS 1½" (OD 41,3 mm)		571790	729,00	
	VUS 2" (OD 54,0 mm)		571795	750,00	
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	1.240,00	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	1.240,00	
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	1.310,00		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM
GS Wärmesysteme System TH	TH 14*		570455	377,00	Herotec tempusPRESS PLUS	H 16*		570320	340,00
	TH 16*		570460	377,00		H 20*		570350	340,00
	TH 20*		570470	377,00		H 25*		570360	340,00
	TH 26*		570475	377,00		H 32		570380	340,00
	TH 32		570480	377,00		H 40 (PZ-4G)		570390	1.150,00
	TH 40		570485	500,00		RFz 16*		571325	393,00
	TH 50 (PZ-S)		572400	1.310,00		RFz 20*		571330	393,00
	TH 63 (PZ-S)		572405	1.310,00		RFz 25		571335	393,00
	TH 14 S (PR-2B)**	Z8	574778 R	252,00		RFz 32		571340	393,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		TH 16*		570460	377,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		TH 20*		570470	377,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		TH 25*		570495	377,00
	TH 32 S (PR-2B)**	Z8	574798 R	277,00		TH 32		570480	377,00
	GS Wärmesysteme System V	V 15		570115		313,00	TH 40		570485
V 18		570125	313,00	TH 50 (PZ-S)		572400	1.310,00		
V 22		570135	313,00	TH 63 (PZ-S)		572405	1.310,00		
V 28		570145	313,00	TH 16 S (PR-2B)**	Z8	574782 R	252,00		
V 35		570155	313,00	TH 20 S (PR-2B)**	Z8	574788 R	252,00		
V 15 S (PR-2B)	Z8	574752 R	252,00	TH 25 S (PR-2B)**	Z8	574792 R	252,00		
V 18 S (PR-2B)	Z8	574756 R	252,00	TH 32 S (PR-2B)	Z8	574798 R	277,00		
V 22 S (PR-2B)	Z8	574758 R	252,00	U 16*		570765	353,00		
V 28 S (PR-2B)	Z8	574760 R	252,00	U 20*		570775	353,00		
V 35 S (PR-2B)	Z8	574762 R	277,00	U 25*		570780	353,00		
H					U 32		570785	414,00	
HASTINIK Hastinik/Hitpress	M 15		570110	313,00	U 40		570790	504,00	
	M 18		570120	313,00	U 50		570795	605,00	
	M 22		570130	313,00	U 63 (PZ-S)		572365	1.310,00	
	M 28		570140	313,00	U 63 (PR-3B)	Z4	572837 R	1.490,00	
	M 35		570150	313,00	U 75 (PR-3B)	Z4	572828 R	1.310,00	
	M 42 (PZ-4G)		570160	1.010,00	Herotec	H 16*	570320	340,00	
	M 54 (PZ-4G)		570170	1.010,00	tempusPRESS	H 20*	570350	340,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	PLUS PPSU	H 25*	570360	340,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	H 32		570380	340,00	
	M 76,1 XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579101 R	2.350,00	TH 16*		570460	377,00	
	M 88,9 G XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579110 R	2.750,00	TH 20*		570470	377,00	
	M 108,0 G XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579111 R	2.750,00	TH 25*		570495	377,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	TH 32		570480	377,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	TH 40		570485	500,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	TH 50 (PZ-S)		572400	1.310,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	TH 63 (PZ-S)		572405	1.310,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	heima24	TH 16*		570460	377,00	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 20*		570470	377,00	TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 26*		570475	377,00	TH 32 S (PR-2B)	Z8	574798 R	277,00		
TH 32		570480	377,00	U 16*		570765	353,00		
TH 40		570485	500,00	U 20*		570775	353,00		
TH 50 (PZ-S)		572400	1.310,00	U 25*		570780	353,00		
TH 63 (PZ-S)		572405	1.310,00	U 32		570785	414,00		
TH 16 S (PR-2B)**	Z8	574782 R	252,00	U 40		570790	504,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00	U 50		570795	605,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00	U 63 (PR-3B)	Z4	572837 R	1.490,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00	U 63 (PZ-S)		572365	1.310,00		
U 16*		570765	353,00	U 75 (PR-3B)	Z4	572828 R	1.310,00		
U 20*		570775	353,00	HELIROMA Klimapress	U 16*	570765	353,00		
U 32		570785	414,00	U 20*		570775	353,00		
HELIROMA Klimapress	U 25*		570780	353,00	U 25*		570780	353,00	
U 32		570785	414,00	U 32		570785	414,00		
U 40		570790	504,00	U 40		570790	504,00		
U 50		570795	605,00	U 50		570795	605,00		
U 63 (PR-3B)	Z4	572837 R	1.490,00	U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 63 (PZ-S)		572365	1.310,00	U 75 (PR-3B)	Z4	572828 R	1.310,00		
U 75 (PR-3B)	Z4	572828 R	1.310,00	HELIROMA Klimapress PPSU	U 16*	570765	353,00		
HELIROMA Klimapress PPSU	U 20*		570775	353,00	U 20*		570775	353,00	
U 25*		570780	353,00	U 25*		570780	353,00		
U 32		570785	414,00	U 32		570785	414,00		
Henco	TH 14*		570455	377,00	HERZ PIPEFIX	TH 10*	570467	377,00	
TH 16*		570460	377,00	TH 16*		570460	377,00		
TH 18*		570465	377,00	TH 20*		570470	377,00		
TH 20*		570470	377,00	TH 26*		570475	377,00		
TH 26*		570475	377,00	TH 32		570480	377,00		
HE 32		571900	452,00	TH 40		570485	500,00		
HEz 40		571904	655,00	TH 50 (PZ-S)		572400	1.310,00		
				TH 63 (PZ-S)		572405	1.310,00		
				THz 75 (PR-3B)	Z4	572829 R	1.240,00		
				TH 10 S (PR-2B)**	Z8	574772 R	252,00		
				TH 16 S (PR-2B)**	Z8	574782 R	252,00		
				TH 20 S (PR-2B)**	Z8	574788 R	252,00		
				TH 26 S (PR-2B)**	Z8	574794 R	252,00		
				TH 32 S (PR-2B)**	Z8	574798 R	277,00		
				HIDRONIX	TH 16*	570460	377,00		
				MULTIGAS	TH 20*	570470	377,00		
					TH 26*	570475	377,00		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
HIDRONIX MULTIPIPE	TH 14*		570455	377,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	H 14*		570310	340,00	
	H 16*		570320	340,00	
	H 18*		570340	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	U 14*		570760	353,00	
	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 26* ¹²⁾		570750	414,00	
	U 32		570785	414,00	
	HIDRONIX UNICO	TH 14*		570455	377,00
		TH 16*		570460	377,00
		TH 20*		570470	377,00
		TH 26*		570475	377,00
		H 14*		570310	340,00
H 16*			570320	340,00	
H 18*			570340	340,00	
H 20*			570350	340,00	
H 26*			570370	340,00	
U 14*			570760	353,00	
U 16*			570765	353,00	
U 18*			570770	353,00	
U 20*			570775	353,00	
U 26* ¹²⁾			570750	414,00	
U 32			570785	414,00	
HITEC Sistema Multistrato		TH 14*		570455	377,00
		TH 16*		570460	377,00
		TH 18*		570465	377,00
		TH 20*		570470	377,00
		TH 26*		570475	377,00
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 18 S (PR-2B)**	Z8	574786 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	HITHERM-ISOTUBI NUMEPRESS	M 15		570110	313,00
M 18			570120	313,00	
M 22			570130	313,00	
M 28			570140	313,00	
M 35			570150	313,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
M 15 S (PR-2B)		Z8	574738 R	252,00	
M 18 S (PR-2B)		Z8	574740 R	252,00	
M 22 S (PR-2B)		Z8	574742 R	252,00	
M 28 S (PR-2B)		Z8	574744 R	252,00	
M 35 S (PR-2B)		Z8	574746 R	277,00	
HITHERM HTpress		M 15		570110	313,00
		M 18		570120	313,00
		M 22		570130	313,00
		M 28		570140	313,00
		M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
	HITHERM HTfire	M 15		570110	313,00
		M 18		570120	313,00
		M 22		570130	313,00
		M 28		570140	313,00
		M 35		570150	313,00
M 42 (PR-3S)		Z2	572706 R	1.370,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
M 15 S (PR-2B)		Z8	574738 R	252,00	
M 18 S (PR-2B)		Z8	574740 R	252,00	
M 22 S (PR-2B)		Z8	574742 R	252,00	
M 28 S (PR-2B)		Z8	574744 R	252,00	
M 35 S (PR-2B)		Z8	574746 R	277,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
HITHERM HTair	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
Hopewell press fit system	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PZ-4G)		570160	1.010,00
	M 54 (PZ-4G)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	hp praski BAVARIA-press	TH 10*		570467
TH 12*			570452	377,00
TH 14*			570455	377,00
TH 16*			570460	377,00
TH 17*			570462	377,00
TH 20*			570470	377,00
TH 25*			570495	377,00
TH 26*			570475	377,00
TH 32			570480	377,00
TH 40			570485	500,00
TH 10 S (PR-2B)**		Z8	574772 R	252,00
TH 12 S (PR-2B)**		Z8	574776 R	252,00
TH 14 S (PR-2B)**		Z8	574778 R	252,00
TH 16 S (PR-2B)**		Z8	574782 R	252,00
TH 17 S (PR-2B)**		Z8	574784 R	252,00
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
ICMA Sempiter	H 16*		570320	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
U 16*		570765	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 26* ¹²⁾		570750	414,00	
U 32		570785	414,00	
U 40		570790	504,00	
U 50		570795	605,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00	
U 63 (PZ-S)		572365	1.310,00	
ICMA Sempigas	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	Idrosanitaria Bonomi	TH 16*		570460
TH 20*			570470	377,00
TH 26*			570475	377,00
TH 16 S (PR-2B)**		Z8	574782 R	252,00
TH 20 S (PR-2B)**		Z8	574788 R	252,00
Homegas	TH 26*		570475	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
Idrosanitaria Bonomi Idropress	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM		
IDROSISTEMI Ta-Press	TH 16*		570460	377,00	IDROTRADE StormSTEEL ¹⁾	M 12		570100	313,00		
	TH 20*		570470	377,00		M 15		570110	313,00		
	TH 26*		570475	377,00		M 18		570120	313,00		
	TH 32		570480	377,00		M 22		570130	313,00		
	TH 40		570485	500,00		M 28		570140	313,00		
	TH 50 (PZ-S)		572400	1.310,00		M 35		570150	313,00		
	TH 63 (PZ-S)		572405	1.310,00		M 42 (PR-3S)	Z2	572706 R	1.370,00		
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		M 54 (PR-3S)	Z2	572708 R	1.370,00		
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
	TH 32 S (PR-2B)	Z8	574798 R	277,00		M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
	F 16*		570717	359,00		M 12 S (PR-2B)	Z8	574736 R	252,00		
	F 20*		570727	359,00		M 15 S (PR-2B)	Z8	574738 R	252,00		
	F 26*		570730	389,00		M 18 S (PR-2B)	Z8	574740 R	252,00		
	F 32		570735	389,00		M 22 S (PR-2B)	Z8	574742 R	252,00		
	F 16 S (PR-2B)**	Z8	574728 R	252,00		M 28 S (PR-2B)	Z8	574744 R	252,00		
	F 20 S (PR-2B)**	Z8	574730 R	252,00		M 35 S (PR-2B)	Z8	574746 R	277,00		
	F 26 S (PR-2B)**	Z8	574732 R	252,00		ILTA INOX/CHIBRO Pressfitting Cuni	M 15		570110	313,00	
	F 32 S (PR-2B)	Z8	574734 R	277,00			M 18		570120	313,00	
	Fz 40		570742	416,00			M 22		570130	313,00	
	Fz 50		570747	630,00			M 28		570140	313,00	
	F 63 (PZ-S)		572385	1.310,00			M 35		570150	313,00	
	H 16*		570320	340,00			M 42 (PR-3S)	Z2	572706 R	1.370,00	
	H 20*		570350	340,00			M 54 (PR-3S)	Z2	572708 R	1.370,00	
	H 26*		570370	340,00			M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	H 32		570380	340,00			M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	H 40 (PZ-46)		570390	1.150,00			M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	U 16*		570765	353,00			M 15 S (PR-2B)	Z8	574738 R	252,00	
	U 20*		570775	353,00			M 18 S (PR-2B)	Z8	574740 R	252,00	
	U 26* ¹²⁾		570750	414,00		M 22 S (PR-2B)	Z8	574742 R	252,00		
	U 32		570785	414,00		M 28 S (PR-2B)	Z8	574744 R	252,00		
	U 40		570790	504,00		M 35 S (PR-2B)	Z8	574746 R	277,00		
	U 50		570795	605,00		ILTA INOX/CHIBRO Pressfitting inox	M 15		570110	313,00	
	U 63 (PZ-S)		572365	1.310,00			M 18		570120	313,00	
	B 16*		570850	412,00			M 22		570130	313,00	
	B 20*		570860	412,00			M 28		570140	313,00	
	B 26		570870	454,00			M 35		570150	313,00	
	B 32		570880	454,00			M 42 (PR-3S)	Z2	572706 R	1.370,00	
	IDROTRADE Storm Multipinza	H 16*		570320			340,00	M 54 (PR-3S)	Z2	572708 R	1.370,00
		H 20*		570350			340,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
		H 26*		570370			340,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
		H 32		570380			340,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
TH 16*			570460	377,00	M 15 S (PR-2B)		Z8	574738 R	252,00		
TH 20*			570470	377,00	M 18 S (PR-2B)		Z8	574740 R	252,00		
TH 26*			570475	377,00	M 22 S (PR-2B)	Z8	574742 R	252,00			
TH 32			570480	377,00	M 28 S (PR-2B)	Z8	574744 R	252,00			
THL 32			570487	377,00	M 35 S (PR-2B)	Z8	574746 R	277,00			
TH 40			570485	500,00	Instantor Press System	TH 16*		570460	377,00		
TH 50 (PZ-S)			572400	1.310,00		TH 20*		570470	377,00		
TH 63 (PZ-S)			572405	1.310,00		TH 26*		570475	377,00		
TH 16 S (PR-2B)**		Z8	574782 R	252,00		TH 32		570480	377,00		
TH 20 S (PR-2B)**		Z8	574788 R	252,00		TH 16 S (PR-2B)**	Z8	574782 R	252,00		
TH 26 S (PR-2B)**		Z8	574794 R	252,00		TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 32 S (PR-2B)		Z8	574798 R	277,00		TH 26 S (PR-2B)**	Z8	574794 R	252,00		
U 16*			570765	353,00		TH 32 S (PR-2B)	Z8	574798 R	277,00		
U 20*			570775	353,00		Instantor Copper Press Imperial	VI 1/2" S (PR-2B)	Z8	574850 R	252,00	
IDROTRADE StormPRES ¹⁾	M 15		570110	313,00			VI 3/4" S (PR-2B)	Z8	574852 R	252,00	
	M 18		570120	313,00			VI 1" S (PR-2B)	Z8	574854 R	252,00	
	M 22		570130	313,00			Instantor Copper Press Metric	M 15		570110	313,00
	M 28		570140	313,00	M 22				570130	313,00	
	M 35		570150	313,00	M 28				570140	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	M 15 S (PR-2B)	Z8		574738 R	252,00		
	M 54 (PR-3S)	Z2	572708 R	1.370,00	M 22 S (PR-2B)	Z8		574742 R	252,00		
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	M 28 S (PR-2B)	Z8		574744 R	252,00		
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	Instantor Copper Press Imperial	M 15		570110	313,00		
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		M 22		570130	313,00		
	M 15 S (PR-2B)	Z8	574738 R	252,00		M 28		570140	313,00		
	M 18 S (PR-2B)	Z8	574740 R	252,00		M 15 S (PR-2B)	Z8	574738 R	252,00		
M 22 S (PR-2B)	Z8	574742 R	252,00	M 22 S (PR-2B)		Z8	574742 R	252,00			
M 28 S (PR-2B)	Z8	574744 R	252,00	M 28 S (PR-2B)		Z8	574744 R	252,00			
M 35 S (PR-2B)	Z8	574746 R	277,00								

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
IPA IPANA Press	TH 10*		570467	377,00	
	TH 11,6*		570482	377,00	
	TH 12*		570452	377,00	
	TH 14*		570455	377,00	
	TH 15*		570457	377,00	
	TH 16*		570460	377,00	
	TH 17*		570462	377,00	
	TH 18*		570465	377,00	
	TH 20*		570470	377,00	
	TH 22*		570472	377,00	
	TH 25*		570495	377,00	
	TH 26*		570475	377,00	
	TH 28		570477	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	THz 75 (PR-3B)	Z4	572829 R	1.240,00	
	TH 10 S (PR-2B)**	Z8	574772 R	252,00	
	TH 11,6 S (PR-2B)**	Z8	574774 R	252,00	
	TH 12 S (PR-2B)**	Z8	574776 R	252,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 15 S (PR-2B)**	Z8	574780 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 17 S (PR-2B)**	Z8	574784 R	252,00	
	TH 18 S (PR-2B)**	Z8	574786 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 22 S (PR-2B)**	Z8	574790 R	252,00	
	TH 25 S (PR-2B)**	Z8	574792 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 28 S (PR-2B)**	Z8	574796 R	277,00	
	TH 32 S (PR-2B)**	Z8	574798 R	277,00	
	IPA THu IPANA Press	TH 16*		570460	377,00
		TH 20*		570470	377,00
		TH 26*		570475	377,00
TH 32			570480	377,00	
TH 40			570485	500,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00	
TH 20 S (PR-2B)**		Z8	574788 R	252,00	
TH 26 S (PR-2B)**		Z8	574794 R	252,00	
TH 32 S (PR-2B)**		Z8	574798 R	277,00	
IPALPEX (Industrie du Plastique et Accessoires)		TH 14*		570455	377,00
	TH 16*		570460	377,00	
	TH 18*		570465	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	THL 32		570487	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18*		572600	393,00
PF 22*			571980	424,00	
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K16/P18*		572600	393,00	
	K/20*		572605	393,00	
	K/25*		572610	393,00	
	K32		572615	393,00	
	K1/40		572620	393,00	
IPLEX PIPELINES AUSTRALIA Iplex K2	K16/P18*		572600	393,00	
	K/20*		572605	393,00	
	K/25*		572610	393,00	
ISOLTUBEX ISOLPEX IPERT	Rfz 16*		571325	393,00	
	Rfz 20*		571330	393,00	
	Rfz 25		571337	433,00	
	Rfz 32		571342	433,00	
ISOLTUBEX Multicapa	Rfz 16*		571325	393,00	
	Rfz 18*		571327	393,00	
	Rfz 20*		571330	393,00	
	Rfz 25		571337	433,00	
	Rfz 32		571342	433,00	
	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	U 63 (PR-3B)	Z4	572837 R	1.490,00	
	U 63 (PZ-S)		572365	1.310,00	
	ISOLTUBEX Multicapa GAS	Rfz 16*		571325	393,00
Rfz 20*			571330	393,00	
Rfz 25			571337	433,00	
Rfz 32			571342	433,00	
ISOLTUBEX Multicapa-PPSU	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
ISOTUBI NUMEPRESS	M 15		570110	313,00	
	M 18 ¹⁾		570120	313,00	
	M 22		570130	313,00	
	M 28 ¹⁾		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
IVAR ALPEX-GAS	B 20		570860	412,00
	B 26		570870	454,00
IVAR Ivar-Press	B 32		570880	454,00
	B 14*		570845	412,00
	B 16*		570850	412,00
	B 18*		570855	412,00
	B 20*		570860	412,00
	B 26		570870	454,00
	B 32		570880	454,00
	Fz 40		570742	416,00
	Fz 50		570747	630,00
	F 63 (PZ-S)		572385	1.310,00
IVAR MULTI PRESS GAS ITALIA	TH 16*		570460	377,00
	TH 20*		570470	377,00
IVAR Multi Press MP	TH 26*		570475	377,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
IVAR Multi Press Leak (MPL)	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	F 16*		570717	359,00
	F 18*		570720	359,00
	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	Fz 40		570742	416,00
	Fz 50		570747	630,00
	F 63 (PZ-S)		572385	1.310,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
	F 32 S (PR-2B)	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-46)		570390	1.150,00
U 16*		570765	353,00	
U 18*		570770	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 26* ¹²⁾		570750	414,00	
U 32		570785	414,00	
U 40		570790	504,00	
U 50		570795	605,00	
U 63 (PZ-S)		572365	1.310,00	
B 16*		570850	412,00	
B 18*		570855	412,00	
B 20*		570860	412,00	
B 26		570870	454,00	
B 32		570880	454,00	
IVAR Multi Press Leak (MPL)	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	F 16*		570717	359,00
	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
F 32 S (PR-2B)	Z8	574734 R	277,00	
H 16*		570320	340,00	
H 20*		570350	340,00	
H 26*		570370	340,00	
H 32		570380	340,00	
U 16*		570765	353,00	
U 20*		570775	353,00	
U 26* ¹²⁾		570750	414,00	
U 32		570785	414,00	
B 16*		570850	412,00	
B 20*		570860	412,00	
B 26		570870	454,00	
B 32		570880	454,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460	377,00	IVT PRIPRESS	TH 16*		570460	377,00	
	TH 20*		570470	377,00		TH 20*		570470	377,00	
	TH 26*		570475	377,00		TH 26*		570475	377,00	
	TH 32		570480	377,00		TH 32		570480	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		TH 40		570485	500,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00		TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	F 16*		570717	359,00		TH 32 S (PR-2B)	Z8	574798 R	277,00	
	F 20*		570727	359,00		J				
	F 26*		570730	389,00		Jäger - Aquatec	H 14*		570310	340,00
	F 32		570735	389,00		Aquapress H	H 16*		570320	340,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00			H 17*		570330	340,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00			H 18*		570340	340,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00			H 20*		570350	340,00
	F 32 S (PR-2B)	Z8	574734 R	277,00			H 26*		570370	340,00
	H 16*		570320	340,00			H 32		570380	340,00
	H 20*		570350	340,00			U 40		570790	504,00
	H 26*		570370	340,00			U 50		570795	605,00
	H 32		570380	340,00			U 63 (PZ-S)		572365	1.310,00
	U 16*		570765	353,00		Jäger - Aquatec	M 15		570110	313,00
	U 20*		570775	353,00		C-Stahl - Press Typ M	M 18		570120	313,00
	U 26* ¹²⁾		570750	414,00			M 22		570130	313,00
	U 32		570785	414,00			M 28		570140	313,00
	B 16*		570850	412,00			M 35		570150	313,00
	B 20*		570860	412,00			M 42 (PR-3S)	Z2	572706 R	1.370,00
	B 26		570870	454,00			M 54 (PR-3S)	Z2	572708 R	1.370,00
	B 32		570880	454,00			M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	IVAR	TH 16*		570460		377,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	Plastic Multi Press	TH 20*		570470		377,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	PMP	TH 25*		570495		377,00	M 15 S (PR-2B)	Z8	574738 R	252,00
		TH 26*		570475		377,00	M 18 S (PR-2B)	Z8	574740 R	252,00
	TH 32		570480	377,00	M 22 S (PR-2B)	Z8	574742 R	252,00		
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	M 28 S (PR-2B)	Z8	574744 R	252,00		
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	M 35 S (PR-2B)	Z8	574746 R	277,00		
	TH 25 S (PR-2B)**	Z8	574792 R	252,00	Jäger - Aquatec	M 15	570110	313,00		
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	Edelstahl -	M 18	570120	313,00		
	TH 32 S (PR-2B)	Z8	574798 R	277,00	Press Typ M	M 22	570130	313,00		
	F 16*		570717	359,00		M 28	570140	313,00		
	F 20*		570727	359,00		M 35	570150	313,00		
	F 26*		570730	389,00		M 42 (PR-3S)	Z2	572706 R	1.370,00	
	F 32		570735	389,00		M 54 (PR-3S)	Z2	572708 R	1.370,00	
	F 16 S (PR-2B)**	Z8	574728 R	252,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	F 20 S (PR-2B)**	Z8	574730 R	252,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	F 26 S (PR-2B)**	Z8	574732 R	252,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	F 32 S (PR-2B)	Z8	574734 R	277,00		M 15 S (PR-2B)	Z8	574738 R	252,00	
	H 16*		570320	340,00		M 18 S (PR-2B)	Z8	574740 R	252,00	
	H 20*		570350	340,00		M 22 S (PR-2B)	Z8	574742 R	252,00	
	H 25*		570360	340,00		M 28 S (PR-2B)	Z8	574744 R	252,00	
	H 26*		570370	340,00		M 35 S (PR-2B)	Z8	574746 R	277,00	
	H 32		570380	340,00	Jäger - Aquatec	V 15	570115	313,00		
	U 16*		570765	353,00	Kupfer -	V 18	570125	313,00		
	U 20*		570775	353,00	Press Typ V	V 22	570135	313,00		
	U 25*		570780	353,00		V 28	570145	313,00		
	U 26* ¹²⁾		570750	414,00		V 35	570155	313,00		
	U 32		570785	414,00		V 42	570165	729,00		
	B 16*		570850	412,00		V 42 (PR-2B)	Z2	572850 R	653,00	
	B 20*		570860	412,00		V 54	570175	750,00		
	B 26		570870	454,00		V 54 (PR-2B)	Z2	572851 R	706,00	
	B 32		570880	454,00		V 15 S (PR-2B)	Z8	574752 R	252,00	
IVT Edelstahl- Presssystem	M 15		570110	313,00		V 18 S (PR-2B)	Z8	574756 R	252,00	
	M 18 ¹⁾		570120	313,00		V 22 S (PR-2B)	Z8	574758 R	252,00	
	M 22		570130	313,00		V 28 S (PR-2B)	Z8	574760 R	252,00	
	M 28 ¹⁾		570140	313,00		V 35 S (PR-2B)	Z8	574762 R	277,00	
	M 35		570150	313,00						
	M 42 (PR-3S)	Z2	572706 R	1.370,00						
	M 54 (PR-3S)	Z2	572708 R	1.370,00						
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00						
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00						
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00						
	M 15 S (PR-2B)	Z8	574738 R	252,00						
	M 18 S (PR-2B)	Z8	574740 R	252,00						
	M 22 S (PR-2B)	Z8	574742 R	252,00						
	M 28 S (PR-2B)	Z8	574744 R	252,00						
	M 35 S (PR-2B)	Z8	574746 R	277,00						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
Jansen AG JANSEN COMISA	TH 14*		570455	377,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	Jaraflex-Presssystem	TH 14*		570455	377,00
		TH 16*		570460	377,00
		TH 17*		570462	377,00
TH 18*			570465	377,00	
TH 20*			570470	377,00	
TH 25*			570495	377,00	
TH 26*			570475	377,00	
TH 32			570480	377,00	
TH 40			570485	500,00	
TH 50 (PZ-S)			572400	1.310,00	
TH 63 (PZ-S)			572405	1.310,00	
TH 14 S (PR-2B)**		Z8	574778 R	252,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00	
TH 17 S (PR-2B)**		Z8	574784 R	252,00	
TH 18 S (PR-2B)**		Z8	574786 R	252,00	
TH 20 S (PR-2B)**		Z8	574788 R	252,00	
TH 25 S (PR-2B)**	Z8	574792 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00		
JUNGWOO JWPress	VUS ½" (OD 15,9 mm)		571770	378,00	
	VUS ¾" (OD 22,2 mm)		571775	378,00	
	VUS 1" (OD 28,6 mm)		571780	378,00	
	VUS 1½" (OD 34,9 mm)		571785	378,00	
	VUS 1½" (OD 41,3 mm)		571790	729,00	
	VUS 2" (OD 54,0 mm)		571795	750,00	
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	1.240,00	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	1.240,00	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	1.310,00	

K

KAN	U 14*		570760	353,00	
KAN-therm Press LBP	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 26* ⁽²⁾		570750	414,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	TH 14*		570455	377,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 25*		570495	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 25 S (PR-2B)**	Z8	574792 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00		
KAN	M 15		570110	313,00	
	KAN-therm Inox	M 18 ⁽¹⁾		570120	313,00
		M 22		570130	313,00
		M 28 ⁽¹⁾		570140	313,00
		M 35		570150	313,00
		M 42 (PZ-4G)		570160	1.010,00
		M 54 (PZ-4G)		570170	1.010,00
		M 42 (PR-3S)	Z2	572706 R	1.370,00
		M 54 (PR-3S)	Z2	572708 R	1.370,00
		M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00
		M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00
		M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00
		M 15 S (PR-2B)	Z8	574738 R	252,00
M 18 S (PR-2B)	Z8	574740 R	252,00		
M 22 S (PR-2B)	Z8	574742 R	252,00		
M 28 S (PR-2B)	Z8	574744 R	252,00		
M 35 S (PR-2B)	Z8	574746 R	277,00		
KAN	M 12		570100	313,00	
	KAN-therm Steel	M 15		570110	313,00
		M 18 ⁽¹⁾		570120	313,00
		M 22		570130	313,00
		M 28 ⁽¹⁾		570140	313,00
		M 35		570150	313,00
		M 42 (PZ-4G)		570160	1.010,00
		M 54 (PZ-4G)		570170	1.010,00
		M 42 (PR-3S)	Z2	572706 R	1.370,00
		M 54 (PR-3S)	Z2	572708 R	1.370,00
		XP 66,7 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579108 R	2.350,00
		M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00
		M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00
		M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00
		M 12 S (PR-2B)	Z8	574736 R	252,00
		M 15 S (PR-2B)	Z8	574738 R	252,00
		M 18 S (PR-2B)	Z8	574740 R	252,00
		M 22 S (PR-2B)	Z8	574742 R	252,00
		M 28 S (PR-2B)	Z8	574744 R	252,00
		M 35 S (PR-2B)	Z8	574746 R	277,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
KAN	U 14*		570760	353,00	
	KAN-therm UltraPRESS	U 16*		570765	353,00
		U 20*		570775	353,00
		U 25*		570780	353,00
		U 26* ⁽²⁾		570750	414,00
		U 32		570785	414,00
		U 40		570790	504,00
		TH 14*		570455	377,00
		TH 16*		570460	377,00
		TH 20*		570470	377,00
		TH 25*		570495	377,00
		TH 26*		570475	377,00
		TH 32		570480	377,00
		TH 40		570485	500,00
		TH 50 (PZ-S)		572400	1.310,00
		TH 63 (PZ-S)		572405	1.310,00
		TH 14 S (PR-2B)**	Z8	574778 R	252,00
TH 16 S (PR-2B)**	Z8	574782 R	252,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 25 S (PR-2B)**	Z8	574792 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00		
KE KELIT COPPERFIX Kupfer	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00	
KE KELIT KELIT KELOX	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
U 40		570790	504,00		
U 50		570795	605,00		
U 63 (PZ-S)		572365	1.310,00		
U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 75 (PR-3B)	Z4	572828 R	1.310,00		
KE KELIT KELOX-PPSU-W	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	U 63 (PZ-S)		572365	1.310,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 75 (PR-3B)	Z4	572828 R	1.310,00		
KE KELIT KELOX-ULTRAX	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	U 63 (PZ-S)		572365	1.310,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 75 (PR-3B)	Z4	572828 R	1.310,00		
KE KELIT KELOX-ULTRAX-W	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	U 63 (PZ-S)		572365	1.310,00	
U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 75 (PR-3B)	Z4	572828 R	1.310,00		
KE KELIT KELOX-WINDOW-U	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	U 63 (PZ-S)		572365	1.310,00	
	U 63 (PR-3B)	Z4	572837 R	1.490,00	
	U 75 (PR-3B)	Z4	572828 R	1.310,00	
	KE KELIT steelFIX C-Stahl	M 15		570110	313,00
		M 18		570120	313,00
M 22			570130	313,00	
M 28			570140	313,00	
M 35			570150	313,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00	
M 76,1 XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00	
M 88,9 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00	
M 108,0 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00	
M 15 S (PR-2B)		Z8	574738 R	252,00	
M 18 S (PR-2B)		Z8	574740 R	252,00	
M 22 S (PR-2B)		Z8	574742 R	252,00	
M 28 S (PR-2B)	Z8	574744 R	252,00		
M 35 S (PR-2B)	Z8	574746 R	277,00		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM		
KE KELIT steelFIX Edelstahl	M 15		570110	313,00	KISAN Kistal C	M 15		570110	313,00		
	M 18		570120	313,00		M 18		570120	313,00		
	M 22		570130	313,00		M 22		570130	313,00		
	M 28		570140	313,00		M 28		570140	313,00		
	M 35		570150	313,00		M 35		570150	313,00		
	M 42 (PR-3S)	Z2	572706 R	1.370,00		M 42 (PR-3S)	Z2	572706 R	1.370,00		
	M 54 (PR-3S)	Z2	572708 R	1.370,00		M 54 (PR-3S)	Z2	572708 R	1.370,00		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
	M 15 S (PR-2B)	Z8	574738 R	252,00		M 15 S (PR-2B)	Z8	574738 R	252,00		
	M 18 S (PR-2B)	Z8	574740 R	252,00		M 18 S (PR-2B)	Z8	574740 R	252,00		
	M 22 S (PR-2B)	Z8	574742 R	252,00		M 22 S (PR-2B)	Z8	574742 R	252,00		
	M 28 S (PR-2B)	Z8	574744 R	252,00		M 28 S (PR-2B)	Z8	574744 R	252,00		
	M 35 S (PR-2B)	Z8	574746 R	277,00		M 35 S (PR-2B)	Z8	574746 R	277,00		
	KEMBLA KemPress (AUS)	VAU 15 (OD 12,7 mm)		572687		324,00	KISAN Kistal Inox	M 15		570110	313,00
		VAU 20 (OD 19,1 mm)		572689		324,00		M 18		570120	313,00
VAU 25 (OD 25,4 mm)			572691	324,00	M 22			570130	313,00		
VAU 32 (OD 31,8 mm)			572693	340,00	M 28			570140	313,00		
VAU 40 (OD 38,1 mm)			572695	504,00	M 35			570150	313,00		
VAU 50 (OD 50,8 mm)			572697	892,00	M 42 (PR-3S)	Z2		572706 R	1.370,00		
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)		572687	324,00	M 54 (PR-3S)	Z2	572708 R	1.370,00			
	VAU 20 (OD 19,1 mm)		572689	324,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00			
	VAU 25 (OD 25,4 mm)		572691	324,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00			
	VAU 32 (OD 31,8 mm)		572693	340,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00			
	VAU 40 (OD 38,1 mm)		572695	504,00	M 15 S (PR-2B)	Z8	574738 R	252,00			
	VAU 50 (OD 50,8 mm)		572697	892,00	M 18 S (PR-2B)	Z8	574740 R	252,00			
KISAN Kisan KD	KI 16*		571360	399,00	M 22 S (PR-2B)	Z8	574742 R	252,00			
	KI 20*		571370	399,00	M 28 S (PR-2B)	Z8	574744 R	252,00			
	KI 25*		571375	399,00	M 35 S (PR-2B)	Z8	574746 R	277,00			
	TH 16*		570460	377,00							
	TH 20*		570470	377,00							
	TH 25*		570495	377,00							
	TH 16 S (PR-2B)**	Z8	574782 R	252,00							
	TH 20 S (PR-2B)**	Z8	574788 R	252,00							
	TH 25 S (PR-2B)**	Z8	574792 R	252,00							
KISAN Kisan WL	KI 16*		571360	399,00							
	KI 20*		571370	399,00							
	KI 25*		571375	399,00							
	KI 32		571380	538,00							
	TH 16*		570460	377,00							
	TH 20*		570470	377,00							
	TH 25*		570495	377,00							
	TH 32		570480	377,00							
	TH 16 S (PR-2B)**	Z8	574782 R	252,00							
	TH 20 S (PR-2B)**	Z8	574788 R	252,00							
KISAN Kisan WM	KI 16*		571360	399,00							
	KI 20*		571370	399,00							
	KI 25*		571375	399,00							
	KI 32		571380	538,00							
KISAN Kisan WR	U 20*		570775	353,00							
	U 25*		570780	353,00							
	U 32		570785	414,00							
	U 40		570790	504,00							
	U 50		570795	605,00							
	U 63 (PZ-S)		572365	1.310,00							
	U 75 (PR-3B)		572828 R	1.310,00							
	TH 20*		570470	377,00							
	TH 25*		570495	377,00							
	TH 32		570480	377,00							
	TH 40		570485	500,00							
	TH 50 (PZ-S)		572400	1.310,00							
	TH 63 (PZ-S)		572405	1.310,00							
	TH 20 S (PR-2B)**	Z8	574788 R	252,00							
	TH 25 S (PR-2B)**	Z8	574792 R	252,00							
	TH 32 S (PR-2B)	Z8	574798 R	277,00							

L				
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		571770	378,00
	VUS ¾" (OD 22,2 mm)		571775	378,00
	VUS 1" (OD 28,6 mm)		571780	378,00
	VUS 1¼" (OD 34,9 mm)		571785	378,00
	VUS 1½" (OD 41,3 mm)		571790	729,00
	VUS 2" (OD 54,0 mm)		571795	750,00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	1.240,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	1.240,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	1.310,00
	LK Systems LK >B-Press Elförzinkat	V 12		570107
V 15			570115	313,00
V 18			570125	313,00
V 22			570135	313,00
V 28			570145	313,00
V 35			570155	313,00
V 42			570165	729,00
V 54			570175	750,00
V 12 S (PR-2B)		Z8	574748 R	252,00
V 15 S (PR-2B)		Z8	574752 R	252,00
V 18 S (PR-2B)		Z8	574756 R	252,00
V 22 S (PR-2B)		Z8	574758 R	252,00
V 28 S (PR-2B)		Z8	574760 R	252,00
V 35 S (PR-2B)		Z8	574762 R	277,00
V 12			570107	313,00
V 15			570115	313,00
V 18			570125	313,00
V 22		570135	313,00	
V 28		570145	313,00	
V 35		570155	313,00	
V 42		570165	729,00	
V 54		570175	750,00	
V 12 S (PR-2B)	Z8	574748 R	252,00	
V 15 S (PR-2B)	Z8	574752 R	252,00	
V 18 S (PR-2B)	Z8	574756 R	252,00	
V 22 S (PR-2B)	Z8	574758 R	252,00	
V 28 S (PR-2B)	Z8	574760 R	252,00	
V 35 S (PR-2B)	Z8	574762 R	277,00	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
LK Systems LK >B-Press Gas	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 54		570175	750,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
V 28 S (PR-2B)	Z8	574760 R	252,00	
V 35 S (PR-2B)	Z8	574762 R	277,00	
LK Systems	TH 16*		570460	377,00
LK Universal	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
M				
MAINCOR	U 16*		570765	353,00
MAINPRESS	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
MAINCOR	U 16*		570765	353,00
MAINFLOR	U 20*		570775	353,00
Mair Heiztechnik M-Press	H 11,5*		570315	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
Ma.s.ter System PRESSMASTER	TH 14*		570455	377,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 14 S (PR-2B)**	Z8	574778 R	252,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	H 14*		570310	340,00
	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	U 14*		570760	353,00
	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PZ-S)		572365	1.310,00
Meier Tobler Metalplast - Stramax Serie MM	H 16*		570320	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 32		570380	340,00
	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	Rfz 32		571340	393,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
METALGRUP	U 16*		570765	353,00
Permatubo	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PZ-S)		572365	1.310,00
METALGRUP	Rfz 16*		571325	393,00
PexGrup	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	Rfz 32		571340	393,00
METALGRUP	U 16*		570765	353,00
MultiGrup	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
Mueller Streamline	VUS ½" (OD 15,9 mm)		571770	378,00
PRS Copper Press	VUS ¾" (OD 22,2 mm)		571775	378,00
	VUS 1" (OD 28,6 mm)		571780	378,00
	VUS 1¼" (OD 34,9 mm)		571785	378,00
	VUS 1½" (OD 41,3 mm)		571790	729,00
	VUS 2" (OD 54,0 mm)		571795	750,00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	1.240,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	1.240,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	1.310,00
MULTITHERM	TH 16*		570460	377,00
PRESSSYSTEM	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	THz 75 (PR-3B)	Z4	572829 R	1.240,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
Multicap Industrial AIS PEX	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	Rfz 32		571340	393,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
Multicap Industrial AIS XPRT	H 16*		570320	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25		571335	393,00
	Rfz 32		571340	393,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	THz 75 (PR-3B)	Z4	572829 R	1.240,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 75 (PR-3B)	Z4	572828 R	1.310,00
Multicap Industrial multitubo systems MC	U 16*		570765	353,00
	U 18*		570770	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 75 (PR-3B)	Z4	572828 R	1.310,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Multicap Industrial multitubo systems MM	H 16*		570320	340,00	NUPI Industrie Italiane Multinupi	B 16*		570850	412,00
	H 20*		570350	340,00		B 18*		570855	412,00
	H 25*		570360	340,00		B 20*		570860	412,00
	H 26*		570370	340,00		B 26		570870	454,00
	H 32		570380	340,00		B 32		570880	454,00
	RFz 16*		571325	393,00		F 16*		570717	359,00
	RFz 20*		571330	393,00		F 18*		570720	359,00
	RFz 25		571335	393,00		F 20*		570727	359,00
	RFz 32		571340	393,00		F 26*		570730	389,00
	TH 16*		570460	377,00		F 32		570735	389,00
	TH 20*		570470	377,00		F 16 S (PR-2B)**	Z8	574728 R	252,00
	TH 25*		570495	377,00		F 20 S (PR-2B)**	Z8	574730 R	252,00
	TH 26*		570475	377,00		F 26 S (PR-2B)**	Z8	574732 R	252,00
	TH 32		570480	377,00		F 32 S (PR-2B)	Z8	574734 R	277,00
	TH 40		570485	500,00		H 16*		570320	340,00
	TH 50 (PZ-S)		572400	1.310,00		H 18*		570340	340,00
	TH 63 (PZ-S)		572405	1.310,00		H 20*		570350	340,00
	THz 75 (PR-3B)	Z4	572829 R	1.240,00		H 25*		570360	340,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		H 26*		570370	340,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		H 32		570380	340,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00		TH 16*		570460	377,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		TH 18*		570465	377,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00		TH 20*		570470	377,00
	U 16*		570765	353,00		TH 25*		570495	377,00
	U 20*		570775	353,00		TH 26*		570475	377,00
	U 25*		570780	353,00		TH 32		570480	377,00
	U 32		570785	414,00		TH 40		570485	500,00
	U 40		570790	504,00		TH 50 (PZ-S)		572400	1.310,00
	U 50		570795	605,00		TH 63 (PZ-S)		572405	1.310,00
	U 63 (PZ-S)		572365	1.310,00		TH 16 S (PR-2B)**	Z8	574782 R	252,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00		TH 20 S (PR-2B)**	Z8	574788 R	252,00
	U 75 (PR-3B)	Z4	572828 R	1.310,00		TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 16*		570460	377,00		TH 32 S (PR-2B)	Z8	574798 R	277,00
	TH 20*		570470	377,00		U 14*		570760	353,00
	TH 26*		570475	377,00		U 16*		570765	353,00
TH 32		570480	377,00	U 18*		570770	353,00		
TH 40		570485	500,00	U 20*		570775	353,00		
TH 50 (PZ-S)		572400	1.310,00	U 25*		570780	353,00		
TH 63 (PZ-S)		572405	1.310,00	U 26** ¹²⁾		570750	414,00		
TH 16 S (PR-2B)**	Z8	574782 R	252,00	U 32		570785	414,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00	U 40		570790	504,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00	U 50		570795	605,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00	U 63 (PR-3B)	Z4	572837 R	1.490,00		
				U 63 (PZ-S)		572365	1.310,00		
N					Nussbaum	VMP ¾" (OD 17,2 mm)		571740	435,00
NEUTHERM	H 16*		570320	340,00	Optifitt-Press	VMP ½" G (OD 21,3 mm)		571766 R	435,00
MEKUPRESS-HT	H 20*		570350	340,00		VMPz ¾" (OD 26,9 mm)		571764	435,00
	H 26*		570370	340,00		VMPz 1" (OD 33,7 mm)		571767	435,00
	H 32		570380	340,00		VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00
	H 40 (PZ-4G)		570390	1.150,00		VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	970,00
	U 40		570790	504,00		VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	970,00
NIBCO	VUS ½" (OD 15,9 mm)		571770	378,00	Nussbaum	VRX 16		571750	397,00
Press System	VUS ¾" (OD 22,2 mm)		571775	378,00	Optiflex-Flowpress	VRX 20		571752	397,00
Copper	VUS 1" (OD 28,6 mm)		571780	378,00		VRX 25		571754	435,00
	VUS 1¼" (OD 34,9 mm)		571785	378,00		VRX 32		571756	435,00
	VUS 1½" (OD 41,3 mm)		571790	729,00		VRX 40		571758	605,00
	VUS 2" (OD 54,0 mm)		571795	750,00		VRX 50		571760	706,00
NICOLL FLUXO	TH 16*		570460	377,00		VRX 63		571797	1.140,00
	TH 20*		570470	377,00	Nussbaum	V 15		570115	313,00
	TH 26*		570475	377,00	Optipress	V 18		570125	313,00
	TH 32		570480	377,00	Aquaplus	V 22		570135	313,00
	TH 40		570485	500,00		V 28		570145	313,00
	TH 50 (PZ-S)		572400	1.310,00		V 35		570155	313,00
	TH 63 (PZ-S)		572405	1.310,00		V 42		570165	729,00
	THz 75 (PR-3B)	Z4	572829 R	1.240,00		V 42 (PR-2B)	Z2	572850 R	653,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		V 54		570175	750,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		V 54 (PR-2B)	Z2	572851 R	706,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		Vfz 64,0 (PR-3B)	Z5	572815 R	1.240,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00		Vfz 76,1 (PR-3B)	Z5	572816 R	1.240,00
						Vfz 88,9 (PR-3B)	Z5	572817 R	1.310,00
						Vfz 108,0 (PR-3B)	Z5	572818 R	1.310,00
						V 15 S (PR-2B)	Z8	574752 R	252,00
						V 18 S (PR-2B)	Z8	574756 R	252,00
						V 22 S (PR-2B)	Z8	574758 R	252,00
						V 28 S (PR-2B)	Z8	574760 R	252,00
						V 35 S (PR-2B)	Z8	574762 R	277,00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
Nussbaum Optipress-Gaz	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	Vfz 64,0 (PR-3B)	Z5	572815 R	1.240,00
	Vfz 76,1 (PR-3B)	Z5	572816 R	1.240,00
	Vfz 88,9 (PR-3B)	Z5	572817 R	1.310,00
	Vfz 108,0 (PR-3B)	Z5	572818 R	1.310,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
V 22 S (PR-2B)	Z8	574758 R	252,00	
V 28 S (PR-2B)	Z8	574760 R	252,00	
V 35 S (PR-2B)	Z8	574762 R	277,00	
Nussbaum Optipress-Therm	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	Vfz 64,0 (PR-3B)	Z5	572815 R	1.240,00
	Vfz 76,1 (PR-3B)	Z5	572816 R	1.240,00
	Vfz 88,9 (PR-3B)	Z5	572817 R	1.310,00
	Vfz 108,0 (PR-3B)	Z5	572818 R	1.310,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
V 22 S (PR-2B)	Z8	574758 R	252,00	
V 28 S (PR-2B)	Z8	574760 R	252,00	
V 35 S (PR-2B)	Z8	574762 R	277,00	
O				
Oventrop Cofit P	H 16 A*		570620	435,00
	H 20 A*		570650	435,00
	H 26 A*		570670	435,00
	H 32 A		570680	435,00
	H 40 A		570690	756,00
	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
Oventrop Cofit PD	U 63 (PZ-S)		572365	1.310,00
	H 16 A*		570620	435,00
Oventrop Cofit PDK	H 20 A*		570650	435,00
	H 26 A*		570670	435,00
Oventrop Cofit PD-HT	H 16 A*		570620	435,00
	H 20 A*		570650	435,00
	H 25 A*		570660	435,00
Oventrop Cofit PDK-HT	H 32 A		570680	435,00
	H 16 A*		570620	435,00
Oventrop Cofit PDK-HT	H 20 A*		570650	435,00
	H 20 A*		570650	435,00
P				
PBTab SERTIPRESS	Rfz 12*		571320	393,00
	Rfz 16*		571325	393,00
	Rfz 20*		571330	393,00
	Rfz 25*		571335	393,00
PBTab SERTI-STEEL	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
	Pegler Yorkshire	> Aalberts integrated piping systems		
PERFEXIM PERFEKT SYSTEM	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
PERFEXIM PERFEKT SYSTEM PLUS	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
TH 16 S (PR-2B)**	Z8	574782 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM		
PERFILTUBO PERFILALUPEX	U 16*		570765	353,00		
	U 18*		570770	353,00		
	U 20*		570775	353,00		
	U 25*		570780	353,00		
	U 32		570785	414,00		
	U 40		570790	504,00		
	U 50		570795	605,00		
	U 63 (PR-3B)	Z4	572837 R	1.490,00		
	U 63 (PZ-S)		572365	1.310,00		
	U 75 (PR-3B)	Z4	572828 R	1.310,00		
	PERFILTUBO PERFILPRESS	M 15		570110	313,00	
		M 18		570120	313,00	
		M 22		570130	313,00	
		M 28		570140	313,00	
		M 35		570150	313,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00		
M 54 (PR-3S)		Z2	572708 R	1.370,00		
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		
M 15 S (PR-2B)		Z8	574738 R	252,00		
M 18 S (PR-2B)		Z8	574740 R	252,00		
M 22 S (PR-2B)		Z8	574742 R	252,00		
M 28 S (PR-2B)		Z8	574744 R	252,00		
M 35 S (PR-2B)		Z8	574746 R	277,00		
PEXTUBE PexTube		Rfz 16*		571325	393,00	
		Rfz 20*		571330	393,00	
	Rfz 25		571337	433,00		
Pipelife C-PRESS	Rfz 32		571342	433,00		
	M 15		570110	313,00		
	M 18		570120	313,00		
	M 22		570130	313,00		
	M 28		570140	313,00		
	M 35		570150	313,00		
	M 42 (PR-3S)	Z2	572706 R	1.370,00		
	M 54 (PR-3S)	Z2	572708 R	1.370,00		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
	M 15 S (PR-2B)	Z8	574738 R	252,00		
	M 18 S (PR-2B)	Z8	574740 R	252,00		
	M 22 S (PR-2B)	Z8	574742 R	252,00		
	M 28 S (PR-2B)	Z8	574744 R	252,00		
M 35 S (PR-2B)	Z8	574746 R	277,00			
Pipelife RADOPRESS	TH 16*		570460	377,00		
	TH 18*		570465	377,00		
	TH 20*		570470	377,00		
	TH 26*		570475	377,00		
	TH 32		570480	377,00		
	TH 40		570485	500,00		
	TH 50 (PZ-S)		572400	1.310,00		
	TH 63 (PZ-S)		572405	1.310,00		
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		
	TH 18 S (PR-2B)**	Z8	574786 R	252,00		
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		
	TH 32 S (PR-2B)	Z8	574798 R	277,00		
	Pipetec Connect	TH 16*		570460	377,00	
		TH 20*		570470	377,00	
TH 26*			570475	377,00		
TH 32			570480	377,00		
TH 40			570485	500,00		
TH 50 (PZ-S)			572400	1.310,00		
TH 63 (PZ-S)			572405	1.310,00		
TH 16 S (PR-2B)**		Z8	574782 R	252,00		
TH 20 S (PR-2B)**		Z8	574788 R	252,00		
TH 26 S (PR-2B)**		Z8	574794 R	252,00		
TH 32 S (PR-2B)		Z8	574798 R	277,00		
PLASTICA ALFA Multypex		U 16*		570765	353,00	
		U 20*		570775	353,00	
		U 32		570785	414,00	
		TH 16*		570460	377,00	
	TH 20*		570470	377,00		
	TH 26*		570475	377,00		
	TH 32		570480	377,00		
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		
	TH 32 S (PR-2B)	Z8	574798 R	277,00		
	PLASTICA ALFA Multypex Air	TH 16*		570460	377,00	
		TH 20*		570470	377,00	
		TH 26*		570475	377,00	
		TH 32		570480	377,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00		
TH 20 S (PR-2B)**		Z8	574788 R	252,00		
TH 26 S (PR-2B)**		Z8	574794 R	252,00		
TH 32 S (PR-2B)		Z8	574798 R	277,00		
PLASTICA ALFA Multypex Alfa Gas		TH 16*		570460	377,00	
		TH 20*		570470	377,00	
		TH 26*		570475	377,00	
		TH 16 S (PR-2B)**	Z8	574782 R	252,00	
		TH 20 S (PR-2B)**	Z8	574788 R	252,00	
		TH 26 S (PR-2B)**	Z8	574794 R	252,00	
		PLASTICA ALFA Multypex Alfa Gas protek	TH 16*		570460	377,00
	TH 20*			570470	377,00	
	TH 26*			570475	377,00	
	TH 16 S (PR-2B)**		Z8	574782 R	252,00	
	TH 20 S (PR-2B)**		Z8	574788 R	252,00	
	TH 26 S (PR-2B)**		Z8	574794 R	252,00	
	PLASTICA ALFA Multypex Plus		TH 16*		570460	377,00
			TH 20*		570470	377,00
			TH 26*		570475	377,00
TH 32				570480	377,00	
TH 16 S (PR-2B)**			Z8	574782 R	252,00	
TH 20 S (PR-2B)**			Z8	574788 R	252,00	
TH 26 S (PR-2B)**			Z8	574794 R	252,00	
TH 32 S (PR-2B)			Z8	574798 R	277,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
PLASTICA ALFA Multypex Thermo	TH 16*		570460	377,00	POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110	313,00	
	TH 20*		570470	377,00		M 18		570120	313,00	
	TH 26*		570475	377,00		M 22		570130	313,00	
	TH 32		570480	377,00		M 28		570140	313,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		M 35		570150	313,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		POLYSAN- C-Stahl-Press- System M	M 42 (PR-3S)	Z2	572706 R	1.370,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		M 54 (PR-3S)	Z2	572708 R	1.370,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00			
TH 16 S (PR-2B)**	Z8	574782 R	252,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00			
TH 20 S (PR-2B)**	Z8	574788 R	252,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00			
TH 26 S (PR-2B)**	Z8	574794 R	252,00	M 15 S (PR-2B)	Z8	574738 R	252,00			
TH 32 S (PR-2B)	Z8	574798 R	277,00	M 18 S (PR-2B)	Z8	574740 R	252,00			
					M 22 S (PR-2B)	Z8	574742 R	252,00		
					M 28 S (PR-2B)	Z8	574744 R	252,00		
					M 35 S (PR-2B)	Z8	574746 R	277,00		
					POLYSAN	M 15		570110	313,00	
					Handelsges.	M 18		570120	313,00	
					m.b.H. & Co KG	M 22		570130	313,00	
					(Krems/Öster- reich)	M 28		570140	313,00	
					M 35			570150	313,00	
					POLYSAN- Edelstahl	M 42 (PR-3S)	Z2	572706 R	1.370,00	
					M 54 (PR-3S)	Z2	572708 R	1.370,00		
					Press-System 1.4520	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
					M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
					M 15 S (PR-2B)	Z8	574738 R	252,00		
					M 18 S (PR-2B)	Z8	574740 R	252,00		
					M 22 S (PR-2B)	Z8	574742 R	252,00		
					M 28 S (PR-2B)	Z8	574744 R	252,00		
					M 35 S (PR-2B)	Z8	574746 R	277,00		
					POLYSAN	M 15		570110	313,00	
					Handelsges.	M 18		570120	313,00	
					m.b.H. & Co KG	M 22		570130	313,00	
					(Krems/Öster- reich)	M 28		570140	313,00	
					M 35			570150	313,00	
					POLYSAN- Edelstahl	M 42 (PR-3S)	Z2	572706 R	1.370,00	
					M 54 (PR-3S)	Z2	572708 R	1.370,00		
					Press-System Gas	M 76.1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
					M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
					M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
					M 15 S (PR-2B)	Z8	574738 R	252,00		
					M 18 S (PR-2B)	Z8	574740 R	252,00		
					M 22 S (PR-2B)	Z8	574742 R	252,00		
					M 28 S (PR-2B)	Z8	574744 R	252,00		
					M 35 S (PR-2B)	Z8	574746 R	277,00		
					POLYSAN	M 15		570110	313,00	
					Handelsges.	M 18		570120	313,00	
					m.b.H. & Co KG	M 22		570130	313,00	
					(Krems/Öster- reich)	M 28		570140	313,00	
					M 35			570150	313,00	
					POLYSAN- Edelstahl	M 42 (PR-3S)	Z2	572706 R	1.370,00	
					M 54 (PR-3S)	Z2	572708 R	1.370,00		
					Press-System Wasser	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
					M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
					M 15 S (PR-2B)	Z8	574738 R	252,00		
					M 18 S (PR-2B)	Z8	574740 R	252,00		
					M 22 S (PR-2B)	Z8	574742 R	252,00		
					M 28 S (PR-2B)	Z8	574744 R	252,00		
					M 35 S (PR-2B)	Z8	574746 R	277,00		
					POLYSAN	TH 14*		570455	377,00	
					Handelsges.	TH 16*		570460	377,00	
					m.b.H. & Co KG	TH 17*		570462	377,00	
					(Krems/Öster- reich)	TH 18*		570465	377,00	
					TH 20*			570470	377,00	
					POLYSAN- Press-System	TH 26*		570475	377,00	
					TH 32			570480	377,00	
					TH 40			570485	500,00	
					TH 50 (PZ-S)			572400	1.310,00	
					TH 63 (PZ-S)			572405	1.310,00	
					THz 75 (PR-3B)	Z4		572829 R	1.240,00	
					TH 14 S (PR-2B)**	Z8		574778 R	252,00	
					TH 16 S (PR-2B)**	Z8		574782 R	252,00	
					TH 17 S (PR-2B)**	Z8		574784 R	252,00	
					TH 18 S (PR-2B)**	Z8		574786 R	252,00	
					TH 20 S (PR-2B)**	Z8		574788 R	252,00	
					TH 26 S (PR-2B)**	Z8		574794 R	252,00	
					TH 32 S (PR-2B)	Z8		574798 R	277,00	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455	377,00	
	TH 16*		570460	377,00	
	TH 17*		570462	377,00	
	TH 18*		570465	377,00	
	TH 20*		570470	377,00	
	POLYSAN-Henco- Press-System	TH 26*		570475	377,00
		HE 32		571900	452,00
		HEz 40		571904	655,00
		TH 14 S (PR-2B)**	Z8	574778 R	252,00
		TH 16 S (PR-2B)**	Z8	574782 R	252,00
		TH 17 S (PR-2B)**	Z8	574784 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
POLYSAN (España) „Rainbow“	U 16*		570765	353,00	
	U 18*		570770	353,00	
	U 20*		570775	353,00	
	U 25*		570780	353,00	
	U 32		570785	414,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	U 63 (PR-3B)	Z4	572837 R	1.490,00	
U 63 (PZ-S)		572365	1.310,00		
Prandelli Multyrama Pf	H 14*		570310	340,00	
	H 16*		570320	340,00	
	H 18*		570340	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	U 40		570790	504,00	
	U 50		570795	605,00	
	U 63 (PR-3B)	Z4	572837 R	1.490,00	
	Prandelli Multyrama Pfm	H 16*		570320	340,00
		H 18*		570340	340,00
		H 20*		570350	340,00
H 26*			570370	340,00	
H 32			570380	340,00	
TH 16*			570460	377,00	
TH 18*			570465	377,00	
TH 20*			570470	377,00	
TH 26*			570475	377,00	
TH 32			570480	377,00	
TH 40			570485	500,00	
TH 50 (PZ-S)			572400	1.310,00	
TH 16 S (PR-2B)**	Z8	574782 R	252,00		
TH 18 S (PR-2B)**	Z8	574786 R	252,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00		
U 16*		570765	353,00		
U 18*		570770	353,00		
U 20*		570775	353,00		
U 40		570790	504,00		
U 50		570795	605,00		
U 63 (PR-3B)	Z4	572837 R	1.490,00		
PURMO Cleverfit Radial	F 16*		570717	359,00	
	F 20*		570727	359,00	
	F 26*		570730	389,00	
	F 32		570735	389,00	
	F 16 S (PR-2B)**	Z8	574728 R	252,00	
	F 20 S (PR-2B)**	Z8	574730 R	252,00	
	F 26 S (PR-2B)**	Z8	574732 R	252,00	
	F 32 S (PR-2B)	Z8	574734 R	277,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	TH 14*		570455	377,00	
	TH 16*		570460	377,00	
	TH 17*		570462	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 17 S (PR-2B)**	Z8	574784 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	U 16*		570765	353,00	
U 20*		570775	353,00		
U 32		570785	414,00		
VP 16*		570910	376,00		
VP 20*		570915	376,00		
VP 25		570920	376,00		
R					
Raccorderie Metalliche aesPRES ¹⁾	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z2	572706 R	1.370,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z2	572708 R	1.370,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z2	572708 R	1.370,00	
M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		
M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
M 15 S (PR-2B)	Z8	574738 R	252,00		
M 18 S (PR-2B)	Z8	574740 R	252,00		
M 22 S (PR-2B)	Z8	574742 R	252,00		
M 28 S (PR-2B)	Z8	574744 R	252,00		
M 35 S (PR-2B)	Z8	574746 R	277,00		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
Raccorderie Metalliche inoxPRES ¹⁾	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
Raccorderie Metalliche MARINEPRES ¹⁾	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
Raccorderie Metalliche steelPRES ¹⁾	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
RBM Tita-fix	B 14*		570845	412,00	
	B 16*		570850	412,00	
	B 18*		570855	412,00	
	B 20*		570860	412,00	
	B 26		570870	454,00	
	F 16*		570717	359,00	
	F 18*		570720	359,00	
	F 20*		570727	359,00	
	F 16 S (PR-2B)**	Z8	574728 R	252,00	
	F 20 S (PR-2B)**	Z8	574730 R	252,00	
	H 14*		570310	340,00	
	H 16*		570320	340,00	
	H 18*		570340	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
H 32		570380	340,00		
TH 14*		570455	377,00		
TH 16*		570460	377,00		
TH 18*		570465	377,00		
TH 20*		570470	377,00		
TH 26*		570475	377,00		
TH 32		570480	377,00		
TH 40		570485	500,00		
TH 50 (PZ-S)		572400	1.310,00		
TH 63 (PZ-S)		572405	1.310,00		
TH 16 S (PR-2B)**	Z8	574782 R	252,00		
TH 20 S (PR-2B)**	Z8	574788 R	252,00		
TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TH 32 S (PR-2B)	Z8	574798 R	277,00		
U 14*		570760	353,00		
U 16*		570765	353,00		
U 18*		570770	353,00		
U 20*		570775	353,00		
RBM Tita-gas	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	Redi Nicol Fluxo	TH 14*		570455	377,00
		TH 16*		570460	377,00
		TH 18*		570465	377,00
		TH 20*		570470	377,00
		TH 26*		570475	377,00
		TH 32		570480	377,00
		TH 40		570485	500,00
TH 50 (PZ-S)			572400	1.310,00	
TH 63 (PZ-S)			572405	1.310,00	
THz 75 (PR-3B)		Z4	572829 R	1.240,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00	
TH 20 S (PR-2B)**		Z8	574788 R	252,00	
TH 26 S (PR-2B)**		Z8	574794 R	252,00	
TH 32 S (PR-2B)		Z8	574798 R	277,00	
Redi Nicol Fluxo Gas		TH 16*		570460	377,00
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	
RIFENG U PRESS FITTING (F5)	U 14*		570760	353,00	RUBINETTERIE Bresciane Bonomi TURBO INOX GAS	M 15		570110	313,00	
	U 16*		570765	353,00		M 18		570120	313,00	
	U 18*		570770	353,00		M 22		570130	313,00	
	U 20*		570775	353,00		M 28		570140	313,00	
	U 25*		570780	353,00		M 35		570150	313,00	
	U 32		570785	414,00		M 42 (PR-3S)	Z2	572706 R	1.370,00	
	U 40		570790	504,00		M 54 (PR-3S)	Z2	572708 R	1.370,00	
	U 50		570795	605,00		M 15 S (PR-2B)	Z8	574738 R	252,00	
	U 63 (PZ-S)		572365	1.310,00		M 18 S (PR-2B)	Z8	574740 R	252,00	
	U 63 (PR-3B)	Z4	572837 R	1.490,00		M 22 S (PR-2B)	Z8	574742 R	252,00	
	U 75 (PR-3B)	Z4	572828 R	1.310,00		M 28 S (PR-2B)	Z8	574744 R	252,00	
						M 35 S (PR-2B)	Z8	574746 R	277,00	
	RIFENG TH PRESS FITTING (F9)	TH 16*		570460		377,00	RUBINETTERIE Bresciane Bonomi TURBO STEEL	M 15		570110
TH 20*			570470	377,00	M 18			570120	313,00	
TH 25*			570495	377,00	M 22			570130	313,00	
TH 26*			570475	377,00	M 28			570140	313,00	
TH 32			570480	377,00	M 35			570150	313,00	
TH 40			570485	500,00	M 42 (PR-3S)	Z2		572706 R	1.370,00	
TH 50 (PZ-S)			572400	1.310,00	M 54 (PR-3S)	Z2		572708 R	1.370,00	
TH 63 (PZ-S)			572405	1.310,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101 R	2.350,00	
					M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110 R	2.750,00	
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579111 R	2.750,00	
RIQUIER A SERTIR	Rfz 12*		571320	393,00	TURBO PRESS	M 15 S (PR-2B)	Z8	574738 R	252,00	
	Rfz 16*		571325	393,00		M 18 S (PR-2B)	Z8	574740 R	252,00	
	Rfz 20*		571330	393,00		M 22 S (PR-2B)	Z8	574742 R	252,00	
	Rfz 25		571335	393,00		M 28 S (PR-2B)	Z8	574744 R	252,00	
						M 35 S (PR-2B)	Z8	574746 R	277,00	
						B 14*		570845	412,00	
						B 16*		570850	412,00	
						B 18*		570855	412,00	
						B 20*		570860	412,00	
						B 26		570870	454,00	
RIQUIER Système multicouche	TH 16*		570460	377,00	B 32		570880	454,00		
	TH 20*		570470	377,00	H 14*		570310	340,00		
	TH 26*		570475	377,00	H 16*		570320	340,00		
	TH 32		570480	377,00	H 18*		570340	340,00		
	TH 40		570485	500,00	H 20*		570350	340,00		
	TH 50 (PZ-S)		572400	1.310,00	H 26*		570370	340,00		
	TH 63 (PZ-S)		572405	1.310,00	H 32		570380	340,00		
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	TH 14*		570455	377,00		
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	TH 16*		570460	377,00		
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	TH 18*		570465	377,00		
	TH 32 S (PR-2B)	Z8	574798 R	277,00	TH 20*		570470	377,00		
	U 16*		570765	353,00	TH 26*		570475	377,00		
	U 20*		570775	353,00	TH 32		570480	377,00		
U 32		570785	414,00	TH 40		570485	500,00			
U 40		570790	504,00	TH 50 (PZ-S)		572400	1.310,00			
U 50		570795	605,00	TH 63 (PZ-S)		572405	1.310,00			
Roth PressCheck	RN 14*		572672	353,00	TH 16 S (PR-2B)**	Z8	574782 R	252,00		
	RN 16		572670	353,00	TH 20 S (PR-2B)**	Z8	574788 R	252,00		
	RN 17*		572674	353,00	TH 26 S (PR-2B)**	Z8	574794 R	252,00		
	RN 20*		572676	353,00	TH 32 S (PR-2B)	Z8	574798 R	277,00		
	RN 25/26		572678	353,00	U 14*		570760	353,00		
	RN 32		572680	414,00	U 16*		570765	353,00		
	RN 40 (PR-3S)	Z2	572714 R	1.370,00	U 18*		570770	353,00		
	RN 50 (PR-3S)	Z2	572716 R	1.370,00	U 20*		570775	353,00		
	RNz 63 (PR-3B)	Z4	572836 R	1.490,00	U 26 ¹²⁾		570750	414,00		
					U 32		570785	414,00		
	Rubinetteria Bresciane Bonomi TURBO CuNi	M 15		570110	313,00	RUBINETTERIE	TH 16*		570460	377,00
		M 18		570120	313,00	Bresciane	TH 20*		570470	377,00
		M 22		570130	313,00	Bonomi	TH 26*		570475	377,00
M 28			570140	313,00	TURBO PRESS	TH 32		570480	377,00	
M 35			570150	313,00	GAS	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00		TH 20 S (PR-2B)**	Z8	574788 R	252,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00		TH 26 S (PR-2B)**	Z8	574794 R	252,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		TH 32 S (PR-2B)	Z8	574798 R	277,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00						
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00						
M 15 S (PR-2B)		Z8	574738 R	252,00						
M 18 S (PR-2B)		Z8	574740 R	252,00						
M 22 S (PR-2B)		Z8	574742 R	252,00						
M 28 S (PR-2B)	Z8	574744 R	252,00							
M 35 S (PR-2B)	Z8	574746 R	277,00							
Rubinetteria Bresciane Bonomi TURBO INOX	M 15		570110	313,00						
	M 18		570120	313,00						
	M 22		570130	313,00						
	M 28		570140	313,00						
	M 35		570150	313,00						
	M 42 (PR-3S)	Z2	572706 R	1.370,00						
	M 54 (PR-3S)	Z2	572708 R	1.370,00						
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00						
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00						
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00						
	M 15 S (PR-2B)	Z8	574738 R	252,00						
	M 18 S (PR-2B)	Z8	574740 R	252,00						
	M 22 S (PR-2B)	Z8	574742 R	252,00						
M 28 S (PR-2B)	Z8	574744 R	252,00							
M 35 S (PR-2B)	Z8	574746 R	277,00							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
S					
SA.MI PLASTIC	TH 14*		570455	377,00	
	TH 16*		570460	377,00	
	TH 18*		570465	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 14 S (PR-2B)**	Z8	574778 R	252,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 18 S (PR-2B)**	Z8	574786 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)**	Z8	574798 R	277,00	
	SA.MI PLASTIC Multistrato Gas	TH 16*		570460	377,00
		TH 20*		570470	377,00
		TH 26*		570475	377,00
		TH 32		570480	377,00
		TH 16 S (PR-2B)**	Z8	574782 R	252,00
		TH 20 S (PR-2B)**	Z8	574788 R	252,00
		TH 26 S (PR-2B)**	Z8	574794 R	252,00
		TH 32 S (PR-2B)**	Z8	574798 R	277,00
SANHA 3fit-Press Pb-free Serie 25000		B 16*		570850	412,00
		B 20*		570860	412,00
		B 26		570870	454,00
		B 32		570880	454,00
		F 16*		570717	359,00
	F 20*		570727	359,00	
	F 26*		570730	389,00	
	F 32		570735	389,00	
	Fz 40		570742	416,00	
	Fz 50		570747	630,00	
	F 63 (PZ-S)		572385	1.310,00	
	F 16 S (PR-2B)**	Z8	574728 R	252,00	
	F 20 S (PR-2B)**	Z8	574730 R	252,00	
	F 26 S (PR-2B)**	Z8	574732 R	252,00	
	F 32 S (PR-2B)**	Z8	574734 R	277,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	H 40 (PZ-4G)		570390	1.150,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)**	Z8	574798 R	277,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
U 26* ¹²⁾		570750	414,00		
U 32		570785	414,00		
U 40		570790	504,00		
U 50		570795	605,00		
U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 63 (PZ-S)		572365	1.310,00		
SANHA 3fit-Press PPSU Serie 35000	B 16*		570850	412,00	
	B 20*		570860	412,00	
	B 26		570870	454,00	
	B 32		570880	454,00	
	F 16*		570717	359,00	
	F 20*		570727	359,00	
	F 26*		570730	389,00	
	F 32		570735	389,00	
	F 16 S (PR-2B)**	Z8	574728 R	252,00	
	F 20 S (PR-2B)**	Z8	574730 R	252,00	
	F 26 S (PR-2B)**	Z8	574732 R	252,00	
	F 32 S (PR-2B)**	Z8	574734 R	277,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	TH 16*		570460	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)**	Z8	574798 R	277,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
	U 26* ¹²⁾		570750	414,00	
	U 32		570785	414,00	
	SANHA Heavy Steel Press	VMP 1/2" G (ØD 21,3 mm)		571766 R	435,00
		VMPz 3/4" (ØD 26,7 mm)		571764	435,00
VMPz 1" (ØD 33,7 mm)			571767	435,00	
VMPz 1 1/4" (PZ-S) (ØD 42,4 mm)			572413	1.430,00	
VMPz 1 1/2" (PR-3B) (ØD 48,3 mm)		Z5	572844 R	970,00	
VMPz 2" (PR-3B) (ØD 60,3 mm)		Z5	572845 R	970,00	
VMPz 2" (PR-3B) (ØD 60,3 mm) ¹¹⁾			571766 R	435,00	
SANHA Heavy Steel Press Gas ⁹⁾	VMPz 3/4" (ØD 26,7 mm)		571764	435,00	
	VMPz 1" (ØD 33,7 mm)		571767	435,00	
	VMPz 1 1/4" (PZ-S) (ØD 42,4 mm)		572413	1.430,00	
	VMPz 1 1/2" (PR-3B) (ØD 48,3 mm)	Z5	572844 R	970,00	
	VMPz 2" (PR-3B) (ØD 60,3 mm)	Z5	572845 R	970,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15		570935	376,00
	SA 18		570940	376,00
	SA 22		570945	376,00
	SA 28		570950	376,00
	SA 35		570955	376,00
	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76.1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88.9 G XL (PR-3S) ¹⁾	Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108.0 G XL (PR-3S) ¹⁾	Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
V 35 S (PR-2B)	Z8	574762 R	277,00	
SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		570935	376,00
	SA 18		570940	376,00
	SA 22		570945	376,00
	SA 28		570950	376,00
	SA 35		570955	376,00
	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	XP 64.0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
V 28 S (PR-2B)	Z8	574760 R	252,00	
V 35 S (PR-2B)	Z8	574762 R	277,00	
SANHA-NiroSan-Presssystem Serie 9000	SA 15		570935	376,00
	SA 18		570940	376,00
	SA 22		570945	376,00
	SA 28		570950	376,00
	SA 35		570955	376,00
	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	XP 64.0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
V 28 S (PR-2B)	Z8	574760 R	252,00	
V 35 S (PR-2B)	Z8	574762 R	277,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM		
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935	376,00	SANHA NiroTherm Industrie Serie 98000	SA 15		570935	376,00		
	SA 18		570940	376,00		SA 18		570940	376,00		
	SA 22		570945	376,00		SA 22		570945	376,00		
	SA 28		570950	376,00		SA 28		570950	376,00		
	SA 35		570955	376,00		SA 35		570955	376,00		
	M 15		570110	313,00		M 15		570110	313,00		
	M 18		570120	313,00		M 18		570120	313,00		
	M 22		570130	313,00		M 22		570130	313,00		
	M 28		570140	313,00		M 28		570140	313,00		
	M 35		570150	313,00		M 35		570150	313,00		
	M 42 (PR-3S)	Z2	572706 R	1.370,00		M 42 (PR-3S)	Z2	572706 R	1.370,00		
	M 54 (PR-3S)	Z2	572708 R	1.370,00		M 54 (PR-3S)	Z2	572708 R	1.370,00		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		
	M 15 S (PR-2B)	Z8	574738 R	252,00		M 15 S (PR-2B)	Z8	574738 R	252,00		
	M 18 S (PR-2B)	Z8	574740 R	252,00		M 18 S (PR-2B)	Z8	574740 R	252,00		
	M 22 S (PR-2B)	Z8	574742 R	252,00		M 22 S (PR-2B)	Z8	574742 R	252,00		
	M 28 S (PR-2B)	Z8	574744 R	252,00		M 28 S (PR-2B)	Z8	574744 R	252,00		
	M 35 S (PR-2B)	Z8	574746 R	277,00		M 35 S (PR-2B)	Z8	574746 R	277,00		
	V 15		570115	313,00		V 15		570115	313,00		
	V 18		570125	313,00		V 18		570125	313,00		
	V 22		570135	313,00		V 22		570135	313,00		
	V 28		570145	313,00		V 28		570145	313,00		
	V 35		570155	313,00		V 35		570155	313,00		
	V 42		570165	729,00		V 42		570165	729,00		
	V 42 (PR-2B)	Z2	572850 R	653,00		V 42 (PR-2B)	Z2	572850 R	653,00		
	V 54		570175	750,00		V 54		570175	750,00		
	V 54 (PR-2B)	Z2	572851 R	706,00		V 54 (PR-2B)	Z2	572851 R	706,00		
	V 15 S (PR-2B)	Z8	574752 R	252,00		V 15 S (PR-2B)	Z8	574752 R	252,00		
	V 18 S (PR-2B)	Z8	574756 R	252,00		V 18 S (PR-2B)	Z8	574756 R	252,00		
	V 22 S (PR-2B)	Z8	574758 R	252,00		V 22 S (PR-2B)	Z8	574758 R	252,00		
	V 28 S (PR-2B)	Z8	574760 R	252,00		V 28 S (PR-2B)	Z8	574760 R	252,00		
	V 35 S (PR-2B)	Z8	574762 R	277,00		V 35 S (PR-2B)	Z8	574762 R	277,00		
	SANHA NiroTherm Serie 91000	SA 15		570935		376,00	SANHA-Press Chrom Serie 16000	SA 12		570930	546,00
		SA 18		570940		376,00		SA 15		570935	376,00
		SA 22		570945		376,00		SA 18		570940	376,00
		SA 28		570950		376,00		SA 22		570945	376,00
		SA 35		570955		376,00		SA 28		570950	376,00
		M 15		570110		313,00		M 12		570100	313,00
M 18			570120	313,00	M 15			570110	313,00		
M 22			570130	313,00	M 18			570120	313,00		
M 28			570140	313,00	M 22			570130	313,00		
M 35			570150	313,00	M 28			570140	313,00		
M 42 (PR-3S)		Z2	572706 R	1.370,00	M 12 S (PR-2B)	Z8		574736 R	252,00		
M 54 (PR-3S)		Z2	572708 R	1.370,00	M 15 S (PR-2B)	Z8		574738 R	252,00		
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	M 18 S (PR-2B)	Z8		574740 R	252,00		
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	M 22 S (PR-2B)	Z8		574742 R	252,00		
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	M 28 S (PR-2B)	Z8		574744 R	252,00		
M 15 S (PR-2B)		Z8	574738 R	252,00	V 12			570107	313,00		
M 18 S (PR-2B)		Z8	574740 R	252,00	V 15			570115	313,00		
M 22 S (PR-2B)		Z8	574742 R	252,00	V 18			570125	313,00		
M 28 S (PR-2B)		Z8	574744 R	252,00	V 22			570135	313,00		
M 35 S (PR-2B)		Z8	574746 R	277,00	V 28			570145	313,00		
V 15			570115	313,00	V 12 S (PR-2B)	Z8		574748 R	252,00		
V 18			570125	313,00	V 15 S (PR-2B)	Z8		574752 R	252,00		
V 22			570135	313,00	V 18 S (PR-2B)	Z8		574756 R	252,00		
V 28			570145	313,00	V 22 S (PR-2B)	Z8		574758 R	252,00		
V 35			570155	313,00	V 28 S (PR-2B)	Z8		574760 R	252,00		
V 42			570165	729,00	V 28 S (PR-2B)	Z8		574762 R	252,00		
V 42 (PR-2B)		Z2	572850 R	653,00							
V 54			570175	750,00							
V 54 (PR-2B)		Z2	572851 R	706,00							
V 15 S (PR-2B)		Z8	574752 R	252,00							
V 18 S (PR-2B)		Z8	574756 R	252,00							
V 22 S (PR-2B)		Z8	574758 R	252,00							
V 28 S (PR-2B)		Z8	574760 R	252,00							
V 35 S (PR-2B)		Z8	574762 R	277,00							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		570930	546,00	
	SA 14		570932	546,00	
	SA 15		570935	376,00	
	SA 16		570937	376,00	
	SA 18		570940	376,00	
	SA 22		570945	376,00	
	SA 28		570950	376,00	
	SA 35		570955	376,00	
	M 12		570100	313,00	
	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 12 S (PR-2B)	Z8	574736 R	252,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
	V 12		570107	313,00	
	V 14		570112	313,00	
	VG 14		570132	313,00	
	V 15		570115	313,00	
	V 16		570117	313,00	
	VG 16		570137	313,00	
	V 18		570125	313,00	
	V 22		570135	313,00	
	V 28		570145	313,00	
	V 35		570155	313,00	
	V 42		570165	729,00	
	V 42 (PR-2B)	Z2	572850 R	653,00	
	V 54		570175	750,00	
	V 54 (PR-2B)	Z2	572851 R	706,00	
	V 12 S (PR-2B)	Z8	574748 R	252,00	
	VG 14 S (PR-2B)	Z8	574750 R	252,00	
	V 15 S (PR-2B)	Z8	574752 R	252,00	
	VG 16 S (PR-2B)	Z8	574754 R	252,00	
	V 18 S (PR-2B)	Z8	574756 R	252,00	
	V 22 S (PR-2B)	Z8	574758 R	252,00	
	V 28 S (PR-2B)	Z8	574760 R	252,00	
	V 35 S (PR-2B)	Z8	574762 R	277,00	
	SANHA-Press Pressfittings Serie 6000	SA 12		570930	546,00
		SA 14		570932	546,00
		SA 15		570935	376,00
SA 16			570937	376,00	
SA 18			570940	376,00	
SA 22			570945	376,00	
SA 28			570950	376,00	
SA 35			570955	376,00	
M 12			570100	313,00	
M 15			570110	313,00	
M 18			570120	313,00	
M 22			570130	313,00	
M 28			570140	313,00	
M 35			570150	313,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00	
XP 64,0 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00	
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00	
M 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
M 12 S (PR-2B)		Z8	574736 R	252,00	
M 15 S (PR-2B)		Z8	574738 R	252,00	
M 18 S (PR-2B)		Z8	574740 R	252,00	
M 22 S (PR-2B)		Z8	574742 R	252,00	
M 28 S (PR-2B)		Z8	574744 R	252,00	
M 35 S (PR-2B)		Z8	574746 R	277,00	
V 12			570107	313,00	
V 14			570112	313,00	
VG 14			570132	313,00	
V 15			570115	313,00	
V 16			570117	313,00	
VG 16			570137	313,00	
V 18			570125	313,00	
V 22			570135	313,00	
V 28			570145	313,00	
V 35			570155	313,00	
V 42			570165	729,00	
V 42 (PR-2B)		Z2	572850 R	653,00	
V 54			570175	750,00	
V 54 (PR-2B)		Z2	572851 R	706,00	
V 12 S (PR-2B)		Z8	574748 R	252,00	
VG 14 S (PR-2B)		Z8	574750 R	252,00	
V 15 S (PR-2B)		Z8	574752 R	252,00	
VG 16 S (PR-2B)		Z8	574754 R	252,00	
V 18 S (PR-2B)		Z8	574756 R	252,00	
V 22 S (PR-2B)	Z8	574758 R	252,00		
V 28 S (PR-2B)	Z8	574760 R	252,00		
V 35 S (PR-2B)	Z8	574762 R	277,00		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	546,00	
	SA 15		570935	376,00	
	SA 18		570940	376,00	
	SA 22		570945	376,00	
	SA 28		570950	376,00	
	SA 35		570955	376,00	
	M 12		570100	313,00	
	M 15		570110	313,00	
	M 18		570120	313,00	
	M 22		570130	313,00	
	M 28		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 12 S (PR-2B)	Z8	574736 R	252,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
	V 12		570107	313,00	
	V 15		570115	313,00	
	V 18		570125	313,00	
	V 22		570135	313,00	
	V 28		570145	313,00	
	V 35		570155	313,00	
	V 42		570165	729,00	
	V 42 (PR-2B)	Z2	572850 R	653,00	
	V 54		570175	750,00	
	V 54 (PR-2B)	Z2	572851 R	706,00	
	V 12 S (PR-2B)	Z8	574748 R	252,00	
	VG 14 S (PR-2B)	Z8	574750 R	252,00	
	V 15 S (PR-2B)	Z8	574752 R	252,00	
	VG 16 S (PR-2B)	Z8	574754 R	252,00	
	V 18 S (PR-2B)	Z8	574756 R	252,00	
	V 22 S (PR-2B)	Z8	574758 R	252,00	
	V 28 S (PR-2B)	Z8	574760 R	252,00	
	V 35 S (PR-2B)	Z8	574762 R	277,00	
	SANHA PURAPRESS Serie 8000	SA 12		570930	546,00
		SA 14		570932	546,00
		SA 15		570935	376,00
SA 16			570937	376,00	
SA 18			570940	376,00	
SA 22			570945	376,00	
SA 28			570950	376,00	
SA 35			570955	376,00	
M 12			570100	313,00	
M 15 ¹⁾			570110	313,00	
M 18 ¹⁾			570120	313,00	
M 22 ¹⁾			570130	313,00	
M 28 ¹⁾			570140	313,00	
M 35 ¹⁾			570150	313,00	
M 42 (PR-3S)		Z2	572706 R	1.370,00	
M 54 (PR-3S)		Z2	572708 R	1.370,00	
XP 64,0 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	2.140,00	
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00	
M 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
M 12 S (PR-2B)		Z8	574736 R	252,00	
M 15 S (PR-2B)		Z8	574738 R	252,00	
M 18 S (PR-2B)		Z8	574740 R	252,00	
M 22 S (PR-2B)		Z8	574742 R	252,00	
M 28 S (PR-2B)		Z8	574744 R	252,00	
M 35 S (PR-2B)		Z8	574746 R	277,00	
V 12			570107	313,00	
V 14			570112	313,00	
VG 14			570132	313,00	
V 15			570115	313,00	
V 16			570117	313,00	
VG 16			570137	313,00	
V 18			570125	313,00	
V 22			570135	313,00	
V 28			570145	313,00	
V 35			570155	313,00	
V 42			570165	729,00	
V 42 (PR-2B)		Z2	572850 R	653,00	
V 54			570175	750,00	
V 54 (PR-2B)		Z2	572851 R	706,00	
V 12 S (PR-2B)		Z8	574748 R	252,00	
VG 14 S (PR-2B)		Z8	574750 R	252,00	
V 15 S (PR-2B)		Z8	574752 R	252,00	
VG 16 S (PR-2B)		Z8	574754 R	252,00	
V 18 S (PR-2B)		Z8	574756 R	252,00	
V 22 S (PR-2B)	Z8	574758 R	252,00		
V 28 S (PR-2B)	Z8	574760 R	252,00		
V 35 S (PR-2B)	Z8	574762 R	277,00		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
SANHA-Therm Serie 24000	SA 12		570930	546,00	SANITOP PERMATUBO INOX	M 15		570110	313,00	
	SA 15		570935	376,00		M 18 ¹⁾		570120	313,00	
	SA 18		570940	376,00		M 22		570130	313,00	
	SA 22		570945	376,00		M 28 ¹⁾		570140	313,00	
	SA 28		570950	376,00		M 35		570150	313,00	
	SA 35		570955	376,00		M 35 (PR-3S)	Z2	572727 R	1.370,00	
	M 12		570100	313,00		M 42 (PZ-4G)		570160	1.010,00	
	M 15		570110	313,00		M 54 (PZ-4G)		570170	1.010,00	
	M 18		570120	313,00		M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 22		570130	313,00		M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 28		570140	313,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 35		570150	313,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00		M 12 S (PR-2B)	Z8	574736 R	252,00	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	2.350,00		M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	2.350,00		M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00		M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00		M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00		M 35 S (PR-2B)	Z8	574746 R	277,00	
	M 12 S (PR-2B)	Z8	574736 R	252,00						
	M 15 S (PR-2B)	Z8	574738 R	252,00		SANPRO THPRESS	TH 16*	570460	377,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00			TH 20*	570470	377,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00			TH 26*	570475	377,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00			TH 32	570480	377,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00			TH 16 S (PR-2B)**	Z8	574782 R	252,00
	V 12		570107	313,00			TH 20 S (PR-2B)**	Z8	574788 R	252,00
	V 15		570115	313,00			TH 26 S (PR-2B)**	Z8	574794 R	252,00
	V 18		570125	313,00			TH 32 S (PR-2B)	Z8	574798 R	277,00
	V 22		570135	313,00						
	V 28		570145	313,00		SATEC SK ViTerm	TH 16*	570460	377,00	
	V 35		570155	313,00			TH 18*	570465	377,00	
	V 42		570165	729,00			TH 20*	570470	377,00	
	V 42 (PR-2B)	Z2	572850 R	653,00			TH 26*	570475	377,00	
	V 54		570175	750,00			TH 32	570480	377,00	
	V 54 (PR-2B)	Z2	572851 R	706,00			U 40	570790	504,00	
	V 12 S (PR-2B)	Z8	574748 R	252,00			U 50	570795	605,00	
	V 15 S (PR-2B)	Z8	574752 R	252,00			U 63 (PZ-S)	572365	1.310,00	
	V 18 S (PR-2B)	Z8	574756 R	252,00		SAVEUR REFLEX	TH 16*	570460	377,00	
	V 22 S (PR-2B)	Z8	574758 R	252,00		PEX Water	TH 20*	570470	377,00	
	V 28 S (PR-2B)	Z8	574760 R	252,00			TH 25*	570495	377,00	
V 35 S (PR-2B)	Z8	574762 R	277,00		TH 32	570480	377,00			
				SAVEUR REFLEX	TH 16*	570460	377,00			
				PEX-AL-PEX Gas	TH 20*	570470	377,00			
					TH 25*	570495	377,00			
					TH 32	570480	377,00			
				Schütz duo-flex	TH 14*	570455	377,00			
				tri-o-flex	TH 16*	570460	377,00			
					TH 17*	570462	377,00			
					TH 20*	570470	377,00			
					TH 25*	570495	377,00			
					TH 16 S (PR-2B)**	Z8	574782 R	252,00		
					TH 20 S (PR-2B)**	Z8	574788 R	252,00		
				Schwer Fittings	M 12	570100	313,00			
				AQUApress	M 15	570110	313,00			
					M 18	570120	313,00			
					M 22	570130	313,00			
					M 28	570140	313,00			
					M 35	570150	313,00			
					M 42 (PZ-4G)	570160	1.010,00			
					M 54 (PZ-4G)	570170	1.010,00			
					M 42 (PR-3S)	Z2	572706 R	1.370,00		
					M 54 (PR-3S)	Z2	572708 R	1.370,00		
					M 12 S (PR-2B)	Z8	574736 R	252,00		
					M 15 S (PR-2B)	Z8	574738 R	252,00		
					M 18 S (PR-2B)	Z8	574740 R	252,00		
					M 22 S (PR-2B)	Z8	574742 R	252,00		
					M 28 S (PR-2B)	Z8	574744 R	252,00		
					M 35 S (PR-2B)	Z8	574746 R	277,00		
				Seppelfricke	> Aalberts integrated piping systems					
				SESTA	TH 14*	570455	377,00			
				SESTA GAS	TH 16*	570460	377,00			
					TH 20*	570470	377,00			
					TH 26*	570475	377,00			
					TH 32	570480	377,00			

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
SESTA Sistema multistrato	H 16*		570320	340,00	
	H 20*		570350	340,00	
	TH 14*		570455	377,00	
	TH 16*		570460	377,00	
	TH 18*		570465	377,00	
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	U 16*		570765	353,00	
	U 20*		570775	353,00	
	SIGMA LI Premium	TH 16*		570460	377,00
		TH 20*		570470	377,00
TH 25*			570495	377,00	
TH 32			570480	377,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00	
TH 20 S (PR-2B)**		Z8	574788 R	252,00	
TH 25 S (PR-2B)**		Z8	574792 R	252,00	
TH 32 S (PR-2B)		Z8	574798 R	277,00	
U 16*			570765	353,00	
U 20*			570775	353,00	
U 25*			570780	353,00	
U 32			570785	414,00	
SLOVARM PEX-THERM	U 16*		570765	353,00	
	U 20*		570775	353,00	
	H 26*		570370	340,00	
	U 32		570785	414,00	
	H 16*		570320	340,00	
	H 20*		570350	340,00	
	H 26*		570370	340,00	
	H 32		570380	340,00	
	STANDARD HIDRAULICA MultiStandard	H 16*		570320	340,00
		H 20*		570350	340,00
H 25*			570360	340,00	
H 32			570380	340,00	
RFz 16*			571325	393,00	
RFz 20*			571330	393,00	
RFz 25			571335	393,00	
RFz 32			571340	393,00	
TH 16*			570460	377,00	
TH 20*			570470	377,00	
TH 25*			570495	377,00	
TH 32			570480	377,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00	
TH 20 S (PR-2B)**		Z8	574788 R	252,00	
TH 25 S (PR-2B)**		Z8	574792 R	252,00	
TH 32 S (PR-2B)		Z8	574798 R	277,00	
U 16*			570765	353,00	
U 18*			570770	353,00	
U 20*			570775	353,00	
U 25*			570780	353,00	
U 32			570785	414,00	
U 40			570790	504,00	
U 50		570795	605,00		
U 63 (PR-3B)	Z4	572837 R	1.490,00		
U 63 (PZ-S)		572365	1.310,00		
steeltrade Presssystem Edelstahl Kontur M	M 15		570110	313,00	
	M 18 ¹⁾		570120	313,00	
	M 22		570130	313,00	
	M 28 ¹⁾		570140	313,00	
	M 35		570150	313,00	
	M 42 (PR-3S)	Z2	572706 R	1.370,00	
	M 54 (PR-3S)	Z2	572708 R	1.370,00	
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00	
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00	
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00	
	M 15 S (PR-2B)	Z8	574738 R	252,00	
	M 18 S (PR-2B)	Z8	574740 R	252,00	
	M 22 S (PR-2B)	Z8	574742 R	252,00	
	M 28 S (PR-2B)	Z8	574744 R	252,00	
	M 35 S (PR-2B)	Z8	574746 R	277,00	
	STELBI Polikraft	H 16*		570320	340,00
		H 20*		570350	340,00
		H 26*		570370	340,00
		TH 16*		570460	377,00
		TH 20*		570470	377,00
TH 26*			570475	377,00	
TH 32			570480	377,00	
TH 40			570485	500,00	
TH 50 (PZ-S)			572400	1.310,00	
TH 63 (PZ-S)			572405	1.310,00	
TH 16 S (PR-2B)**		Z8	574782 R	252,00	
TH 20 S (PR-2B)**		Z8	574788 R	252,00	
TH 26 S (PR-2B)**		Z8	574794 R	252,00	
TH 32 S (PR-2B)		Z8	574798 R	277,00	
U 16*			570765	353,00	
U 20*			570775	353,00	
U 26* ¹²⁾			570750	414,00	
STELBI Stelgas		TH 16*		570460	377,00
	TH 20*		570470	377,00	
	TH 26*		570475	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
STH Westco COPPER PRESS	M 15		570110	313,00
	M 22		570130	313,00
	M 28 ¹⁾		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
T				
TDM BRASS Serie 1600	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	THL 32		570487	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
U 16*		570765	353,00	
U 18*		570770	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 26* ¹²⁾		570750	414,00	
U 32		570785	414,00	
TDM BRASS Serie 2600	H 16*		570320	340,00
	H 18*		570340	340,00
	H 20*		570350	340,00
	H 25*		570360	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 25*		570495	377,00
	TH 26*		570475	377,00
	THL 32		570487	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	U 16*		570765	353,00
U 18*		570770	353,00	
U 20*		570775	353,00	
U 25*		570780	353,00	
U 26* ¹²⁾		570750	414,00	
U 32		570785	414,00	
TDM BRASS Serie 1700 gas	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	THL 32		570487	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TermoConcept TC-PRESS	Basic E01 ¹⁾		571855	618,00
THERMOLUTZ	H 14*		570310	340,00
	H 16*		570320	340,00
	TH 20*		570470	377,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
TE-SA TE-SA press serie 800	TH 14*		570455	377,00
	TH 16*		570460	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 14 S (PR-2B)**	Z8	574778 R	252,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 26 S (PR-2B)**	Z8	574794 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
THERMACOME ACOPEX ALU	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	U 16*		570765	353,00
	U 20*		570775	353,00
U 32		570785	414,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM	
TIEMME 1650 AL-COBRAPEX	TH 14*		570455	377,00	TRA MULTITRAPRESS	U 16*		570765	353,00	
	TH 16*		570460	377,00		U 18*		570770	353,00	
	TH 18*		570465	377,00		U 20*		570775	353,00	
	TH 20*		570470	377,00		U 25*		570780	353,00	
	TH 25*		570495	377,00		U 32		570785	414,00	
	TH 26*		570475	377,00		U 40		570790	504,00	
	THL 32		570487	377,00		U 50		570795	605,00	
	TH 40		570485	500,00		U 63 (PR-3B)	Z4	572837 R	1.490,00	
	TH 50 (PZ-S)		572400	1.310,00		U 63 (PZ-S)		572365	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00		TRA TRAPRESS	H 12*		570300	340,00
	THz 75 (PR-3B)	Z4	572829 R	1.240,00			H 16*		570320	340,00
	TH 14 S (PR-2B)**	Z8	574778 R	252,00			H 20*		570350	340,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00			H 25*		570360	340,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00			H 32		570380	340,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00			RFz 12*		571320	393,00
	TH 25 S (PR-2B)**	Z8	574792 R	252,00			RFz 16*		571325	393,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00			RFz 20*		571330	393,00
							RFz 25		571335	393,00
							RFz 32		571340	393,00
	TIEMME 1700 COBRAPEX	RFz 12*		571320		393,00	Tradelink TradePex Crimp Water	K16/P18*		572600
RFz 16*			571325	393,00	K/20*			572605	393,00	
RFz 20*			571330	393,00	K/25*			572610	393,00	
RFz 25			571335	393,00	K32			572615	393,00	
RFz 32			571340	393,00	K140			572620	393,00	
TH 40			570485	500,00	K150			572625	645,00	
TH 50 (PZ-S)			572400	1.310,00	Tradelink TradePex Crimp Gas	K16/P18*			572600	393,00
TH 63 (PZ-S)			572405	1.310,00		K/20*			572605	393,00
				K/25*			572610	393,00		
				K32			572615	393,00		
TIEMME 1650 AL-COBRAPEX GAS	TH 16*		570460	377,00	TUBIPLAST ITALY MULTILAYER PIPE	TH 16*		570460	377,00	
	TH 20*		570470	377,00		TH 18*		570465	377,00	
	TH 26*		570475	377,00		TH 20*		570470	377,00	
	THL 32		570487	377,00		TH 26*		570475	377,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		TH 32		570480	377,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		TH 40		570485	500,00	
TIGRE ALPEX GÁS	TH 16*		570460	377,00	TH 50 (PZ-S)		572400	1.310,00		
	TH 20*		570470	377,00	TH 63 (PZ-S)		572405	1.310,00		
	TH 26*		570475	377,00	TH 16 S (PR-2B)**	Z8	574782 R	252,00		
	TH 32		570480	377,00	TH 18 S (PR-2B)**	Z8	574786 R	252,00		
					TH 20 S (PR-2B)**	Z8	574788 R	252,00		
					TH 26 S (PR-2B)**	Z8	574794 R	252,00		
TKM Systemtechnik	TH 14*		570455	377,00	TH 32 S (PR-2B)	Z8	574798 R	277,00		
	TH 16*		570460	377,00	H 16*		570320	340,00		
	TH 20*		570470	377,00	H 18*		570340	340,00		
	TH 26*		570475	377,00	H 20*		570350	340,00		
	TH 32		570480	377,00	H 26*		570370	340,00		
	TH 40		570485	500,00	H 32		570380	340,00		
	TH 50 (PZ-S)		572400	1.310,00	U 16*		570765	353,00		
	TH 63 (PZ-S)		572405	1.310,00	U 18*		570770	353,00		
					U 20*		570775	353,00		
					U 26* ¹²⁾		570750	414,00		
TRA Multi TRA+	H 16*		570320	340,00	U 32		570785	414,00		
	H 20*		570350	340,00	TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16*		570460	377,00	
	H 25*		570360	340,00		TH 18*		570465	377,00	
	H 26*		570370	340,00		TH 20*		570470	377,00	
	H 32		570380	340,00		TH 26*		570475	377,00	
	H 40 (PZ-46)		570390	1.150,00		TH 32		570480	377,00	
	TH 16*		570460	377,00		TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20*		570470	377,00		TH 18 S (PR-2B)**	Z8	574786 R	252,00	
	TH 25*		570495	377,00		TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26*		570475	377,00		TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32		570480	377,00		TH 32 S (PR-2B)	Z8	574798 R	277,00	
	TH 40		570485	500,00	TWEETOP	U 16*		570765	353,00	
	TH 50 (PZ-S)		572400	1.310,00		U 20*		570775	353,00	
	TH 63 (PZ-S)		572405	1.310,00		U 25*		570780	353,00	
	THz 75 (PR-3B)	Z4	572829 R	1.240,00		U 32		570785	414,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00		U 40		570790	504,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00		U 50		570795	605,00	
	TH 25 S (PR-2B)**	Z8	574792 R	252,00		U 63 (PR-3B)	Z4	572837 R	1.490,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00		U 63 (PZ-S)		572365	1.310,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	U 75 (PR-3B)	Z4	572828 R	1.310,00		
	U 16*		570765	353,00						
	U 20*		570775	353,00						
U 25*		570780	353,00							
U 26* ¹²⁾		570750	414,00							
U 32		570785	414,00							
U 40		570790	504,00							
U 50		570795	605,00							
U 63 (PR-3B)	Z4	572837 R	1.490,00							
U 63 (PZ-S)		572365	1.310,00							
U 75 (PR-3B)	Z4	572828 R	1.310,00							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
U				
UNICAL AG	U 16*		570765	353,00
MAX-MULTIPEX	U 20*		570775	353,00
	H 26*		570370	340,00
	U 26* ⁽¹²⁾		570750	414,00
	U 32		570785	414,00
UNIDELTA DELTAPRESS	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
UNIDELTA DELTAPRESS GAS	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 32		570785	414,00
Uponor	UP 14*		572630	353,00
	UP 16*		572632	353,00
	UP 20*		572636	353,00
	UP 25		572638	353,00
	UP 32		572640	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PZ-S)		572365	1.310,00
	U 75 (PR-3B)	Z4	572828 R	1.310,00
V				
Valsir Bravopress	B 16*		570850	412,00
	B 20*		570860	412,00
	B 26		570870	454,00
	B 32		570880	454,00
	F 16*		570717	359,00
	F 20*		570727	359,00
	F 26*		570730	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 32 V		570685	435,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 26* ⁽¹²⁾		570750	414,00
	U 32		570785	414,00
Valsir PEXAL	H 14*		570310	340,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	H 32 V		570685	435,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 26* ⁽¹²⁾		570750	414,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PZ-S)		572365	1.310,00
	U 75 (PR-3B)	Z4	572828 R	1.310,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
Van Marcke NV SYSTEMPEX	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	THz 75 (PR-3B)	Z4	572829 R	1.240,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
Van Marcke NV Tubipress	M 12		570100	313,00
	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PZ-4G)		570160	1.010,00
	M 54 (PZ-4G)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00
	M 12 S (PR-2B)	Z8	574736 R	252,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
Variotherm System TH	TH 11,6*		570482	377,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 11,6 S (PR-2B)**	Z8	574774 R	252,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
VESBO CARBON	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
VESBO INOX	M 15		570110	313,00
	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
VESBO MULTIPRESS TH-U	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
	U 26* ⁽¹²⁾		570750	414,00
	U 32		570785	414,00
VESBO VPREMIUM	U 16*		570765	353,00
	U 20*		570775	353,00
	U 25*		570780	353,00
	U 32		570785	414,00
	U 40		570790	504,00
	U 50		570795	605,00
	U 63 (PZ-S)		572365	1.310,00
Viega Fonterra	VX 12*		571630	435,00
	VP 14/15*		570905	376,00
	VP 16/17*		570910	376,00
	VP 20*		570915	376,00
	VP 25 ⁽²⁾		570920	376,00
Viega MegaPress (ASTM) ⁽¹⁰⁾	VMP 3/8" (OD 17,2 mm)		571740	435,00
	VMP 1/2" G (OD 21,3 mm)		571766 R	435,00
	VMPz 3/8" (OD 26,9 mm)		571764	435,00
	VMPz 1" (OD 33,7 mm)		571767	435,00
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413	1.430,00
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844 R	970,00
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	970,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
Viega MegaPress 304 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	435,00	Viega Profipress	V 12		570107	313,00	
	VMPz ¾" (OD 26,9 mm)		571764	435,00		VG 14		570132	313,00	
	VMPz 1" (OD 33,7 mm)		571767	435,00		V 15		570115	313,00	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00		VG 16		570137	313,00	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	970,00		V 18		570125	313,00	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	970,00		V 22		570135	313,00	
Viega MegaPress 316 (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	435,00		V 28		570145	313,00	
	VMPz ¾" (OD 26,9 mm)		571764	435,00		V 35		570155	313,00	
	VMPz 1" (OD 33,7 mm)		571767	435,00		V 42		570165	729,00	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00		V 42 (PR-2B)	22	572850 R	653,00	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	970,00		V 54		570175	750,00	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	970,00		V 54 (PR-2B)	22	572851 R	706,00	
Viega MegaPress 316 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	435,00		Vfz 64,0 (PR-3B) ⁶⁾	25	572815 R	1.240,00	
	VMPz ¾" (OD 26,9 mm)		571764	435,00		Vfz 66,7 (PR-3B)	25	572846 R	1.240,00	
	VMPz 1" (OD 33,7 mm)		571767	435,00		Vfz 76,1 (PR-3B) ⁶⁾	25	572816 R	1.240,00	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00		Vfz 88,9 (PR-3B) ⁶⁾	25	572817 R	1.310,00	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	970,00		Vfz 108,0 (PR-3B) ⁶⁾	25	572818 R	1.310,00	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	970,00		V 12 S (PR-2B)	28	574748 R	252,00	
Viega MegaPress CuNi (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	435,00		VG 14 S (PR-2B)	28	574750 R	252,00	
	VMPz ¾" (OD 26,9 mm)		571764	435,00		V 15 S (PR-2B)	28	574752 R	252,00	
	VMPz 1" (OD 33,7 mm)		571767	435,00	VG 16 S (PR-2B)	28	574754 R	252,00		
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00	V 18 S (PR-2B)	28	574756 R	252,00		
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	970,00	V 22 S (PR-2B)	28	574758 R	252,00		
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	970,00	V 28 S (PR-2B)	28	574760 R	252,00		
Viega MegaPress FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	435,00	V 35 S (PR-2B)	28	574762 R	277,00		
	VMPz ¾" (OD 26,9 mm)		571764	435,00	Viega Profipress G	V 12		570107	313,00	
	VMPz 1" (OD 33,7 mm)		571767	435,00		VG 14		570132	313,00	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00		V 15		570115	313,00	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	970,00		VG 16		570137	313,00	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	970,00		V 18		570125	313,00	
Viega Megapress (EN) ⁹⁾	VMP ¾" (OD 17,2 mm)		571740	435,00		V 22		570135	313,00	
	VMP ½" G (OD 21,3 mm)		571766 R	435,00		V 28		570145	313,00	
	VMPz ¾" (OD 26,9 mm)		571764	435,00		V 35		570155	313,00	
	VMPz 1" (OD 33,7 mm)		571767	435,00		V 42		570165	729,00	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00		V 42 (PR-2B)	22	572850 R	653,00	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	970,00		V 54		570175	750,00	
Viega Megapress S (EN) ⁹⁾	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	970,00		V 54 (PR-2B)	22	572851 R	706,00	
	VMP ¾" (OD 17,2 mm)		571740	435,00		Vfz 64,0 (PR-3B) ⁶⁾	25	572815 R	1.240,00	
	VMP ½" G (OD 21,3 mm)		571766 R	435,00		VG 16 S (PR-2B)	28	574748 R	252,00	
	VMPz ¾" (OD 26,9 mm)		571764	435,00		VG 14 S (PR-2B)	28	574750 R	252,00	
	VMPz 1" (OD 33,7 mm)		571767	435,00		V 15 S (PR-2B)	28	574752 R	252,00	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	1.430,00		VG 16 S (PR-2B)	28	574754 R	252,00	
Viega Megapress S XL (EN) ⁹⁾	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	970,00		V 18 S (PR-2B)	28	574756 R	252,00	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	970,00		V 22 S (PR-2B)	28	574758 R	252,00	
	VMPz 2½" XL (PR-3B) EN (OD 76,1 mm)	27 XL 45 kN ⁴⁾	579112 R	1.240,00		V 28 S (PR-2B)	28	574760 R	252,00	
	VMPz 3" XL (PR-3B) (OD 88,9 mm)	27 XL 45 kN ⁴⁾	579113 R	1.240,00	V 35 S (PR-2B)	28	574762 R	277,00		
	VMPz 4" XL (PR-3B) (OD 114,3 mm)	27 XL 45 kN ⁴⁾	579114 R	1.310,00	Viega Profipress S	V 12		570107	313,00	
	Viega Pexfit	VX 16*		571635		435,00	V 15		570115	313,00
VX 20*			571640	435,00		V 18		570125	313,00	
VX 25*			571645	435,00		V 22		570135	313,00	
Viega Pexfit G	VX 16*		571635	435,00		V 28		570145	313,00	
	VX 20*		571640	435,00		V 35		570155	313,00	
	VX 25*		571645	435,00		V 12 S (PR-2B)	28	574748 R	252,00	
Viega Prestabo	V 12		570107	313,00		V 15 S (PR-2B)	28	574752 R	252,00	
	V 15		570115	313,00		V 18 S (PR-2B)	28	574756 R	252,00	
	V 18		570125	313,00		V 22 S (PR-2B)	28	574758 R	252,00	
	V 22		570135	313,00	V 28 S (PR-2B)	28	574760 R	252,00		
	V 28		570145	313,00	V 35 S (PR-2B)	28	574762 R	277,00		
	V 35		570155	313,00	Viega Profipress Therm	V 12		570107	313,00	
	V 42		570165	729,00		V 15		570115	313,00	
	V 42 (PR-2B)	22	572850 R	653,00		V 18		570125	313,00	
	V 54		570175	750,00		V 22		570135	313,00	
	V 54 (PR-2B)	22	572851 R	706,00		V 12 S (PR-2B)	28	574748 R	252,00	
	Vfz 64,0 (PR-3B) ⁶⁾	25	572815 R	1.240,00		V 15 S (PR-2B)	28	574752 R	252,00	
	Vfz 76,1 (PR-3B) ⁶⁾	25	572816 R	1.240,00		V 18 S (PR-2B)	28	574756 R	252,00	
	Vfz 88,9 (PR-3B) ⁶⁾	25	572817 R	1.310,00		V 22 S (PR-2B)	28	574758 R	252,00	
	Vfz 108,0 (PR-3B) ⁶⁾	25	572818 R	1.310,00		Viega ProPress (ASTM) ¹⁰⁾	VUS ½" (OD 15,9 mm)		571770	378,00
	V 12 S (PR-2B)	28	574748 R	252,00			VUS ¾" (OD 22,2 mm)		571775	378,00
	V 15 S (PR-2B)	28	574752 R	252,00	VUS 1" (OD 28,6 mm)			571780	378,00	
	V 18 S (PR-2B)	28	574756 R	252,00	VUS 1¼" (OD 34,9 mm)			571785	378,00	
	V 22 S (PR-2B)	28	574758 R	252,00	VUS 1½" (OD 41,3 mm)			571790	729,00	
	V 28 S (PR-2B)	28	574760 R	252,00	VUS 2" (OD 54,0 mm)			571795	750,00	
	V 35 S (PR-2B)	28	574762 R	277,00	XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	25	572819 R	1.240,00	
					XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	25	572820 R	1.240,00	
					XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	25	572821 R	1.310,00	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM
Viega ProPress 304 FKM (ASTM) ⁽³⁾	VUS ½" (OD 15,9 mm)		571770	378,00
	VUS ¾" (OD 22,2 mm)		571775	378,00
	VUS 1" (OD 28,6 mm)		571780	378,00
	VUS 1½" (OD 34,9 mm)		571785	378,00
	VUS 1½" (OD 41,3 mm)		571790	729,00
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	1.240,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	1.240,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	1.310,00
	VUS ½" (OD 15,9 mm)		571770	378,00
	VUS ¾" (OD 22,2 mm)		571775	378,00
Viega ProPress 316 (ASTM) ⁽³⁾	VUS 1" (OD 28,6 mm)		571780	378,00
	VUS 1½" (OD 34,9 mm)		571785	378,00
	VUS 1½" (OD 41,3 mm)		571790	729,00
	VUS 2" (OD 54,0 mm)		571795	750,00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	1.240,00
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	1.240,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	1.310,00
	VAU 15 (OD 12,7 mm)		572687	324,00
	VAU 20 (OD 19,1 mm)		572688	324,00
	VAU 25 (OD 25,4 mm)		572691	324,00
Viega ProPress WATER System AUS	VAU 32 (OD 31,8 mm)		572693	340,00
	VAU 40 (OD 38,1 mm)		572695	504,00
	VAU 50 (OD 50,8 mm)		572697	892,00
	VAU 15 (OD 12,7 mm)		572687	324,00
	VAU 20 (OD 19,1 mm)		572688	324,00
Viega ProPress GAS System AUS	VAU 25 (OD 25,4 mm)		572691	324,00
	VAU 32 (OD 31,8 mm)		572693	340,00
	VAU 40 (OD 38,1 mm)		572695	504,00
	VAU 50 (OD 50,8 mm)		572697	892,00
	Viega Raxinox	VRX 16		571750
VRX 20			571752	397,00
Viega Raxofix	VRX 16		571750	397,00
	VRX 20		571752	397,00
	VRX 25		571754	435,00
	VRX 32		571756	435,00
	VRX 40		571758	605,00
	VRX 50		571760	706,00
Viega Sanfix ⁽²⁾	VP 16/17 ⁽³⁾		570910	376,00
	VP 20 ⁽³⁾		570915	376,00
	VP 25 ⁽³⁾		570920	376,00
	VP 32		570925	416,00
	VP 40 (PZ-4G)		570970	997,00
	VPz 50 (PZ-S)		572350	1.310,00
Viega Sanfix Fosta ⁽³⁾	VPz 63 (PZ-S)		572355	1.310,00
	VP 16/17 ⁽³⁾		570910	376,00
	VP 20 ⁽³⁾		570915	376,00
	VP 25 ⁽³⁾		570920	376,00
	VP 32		570925	416,00
	VP 40 (PZ-4G)		570970	997,00
Viega Sanpress	VPz 50 (PZ-S)		572350	1.310,00
	VPz 63 (PZ-S)		572355	1.310,00
	V 12		570107	313,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
Viega Sanpress Inox	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	VR 76,1 (PR-3B) ⁽⁴⁾	Z5	572822 R	1.240,00
	VR 88,9 (PR-3B) ⁽⁴⁾	Z5	572823 R	1.310,00
	VR 108,0 (PR-3B) ⁽⁴⁾	Z5	572824 R	1.310,00
	V 12 S (PR-2B)	Z8	574748 R	252,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
V 42		570165	729,00	
Viega Sanpress Inox G	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	1.240,00
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	1.240,00
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	1.310,00
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	1.310,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
	V 15		570115	313,00
	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
V 54 (PR-2B)	Z2	572851 R	706,00	
Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815 R	1.240,00	
Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	1.240,00	
Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	1.310,00	
Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	1.310,00	
V 15 S (PR-2B)	Z8	574752 R	252,00	
V 18 S (PR-2B)	Z8	574756 R	252,00	
V 22 S (PR-2B)	Z8	574758 R	252,00	
V 28 S (PR-2B)	Z8	574760 R	252,00	
V 35 S (PR-2B)	Z8	574762 R	277,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	KM	
Viega Smartpress	VX 16"		571635	435,00	
	VX 20"		571640	435,00	
	VX 25"		571645	435,00	
Viega Temponox	V 15		570115	313,00	
	V 18		570125	313,00	
	V 22		570135	313,00	
	V 28		570145	313,00	
	V 35		570155	313,00	
	V 42		570165	729,00	
	V 42 (PR-2B)	Z2	572850 R	653,00	
	V 54		570175	750,00	
	V 54 (PR-2B)	Z2	572851 R	706,00	
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	1.240,00	
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	1.310,00	
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	1.310,00	
	Viessmann	V 15 S (PR-2B)	Z8	574752 R	252,00
V 18 S (PR-2B)		Z8	574756 R	252,00	
V 22 S (PR-2B)		Z8	574758 R	252,00	
V 28 S (PR-2B)		Z8	574760 R	252,00	
V 35 S (PR-2B)		Z8	574762 R	277,00	
TH 14"			570455	377,00	
TH 16"			570460	377,00	
TH 20"			570470	377,00	
TH 26"			570475	377,00	
TH 32			570480	377,00	
TH 40			570485	500,00	
TH 16"			570460	377,00	
TH 20"			570470	377,00	
Vogel & Noot EASYTEC	TH 26"		570475	377,00	
	TH 32		570480	377,00	
	TH 40		570485	500,00	
	TH 50 (PZ-S)		572400	1.310,00	
	TH 63 (PZ-S)		572405	1.310,00	
	TH 16 S (PR-2B)**	Z8	574782 R	252,00	
	TH 20 S (PR-2B)**	Z8	574788 R	252,00	
	TH 26 S (PR-2B)**	Z8	574794 R	252,00	
	TH 32 S (PR-2B)	Z8	574798 R	277,00	
	VSH > Aalberts integrated piping systems				

W

Watts MTR Art press	TH 16"		570460	377,00
	TH 20"		570470	377,00
	TH 26"		570475	377,00
	TH 32		570480	377,00
WATTS RADIANT	US ¾"		571450	429,00
	US ½"		571455	429,00
Watts WaterPEX	US ¾"		571460	429,00
	US 1"		571465	429,00
	US 1 ¼"		571470	429,00
	US 1 ½"		571475	429,00
WATTS RADIANT	US ¾"		571450	429,00
	US ½"		571455	429,00
Watts RadiantPEX	US ¾"		571460	429,00
	US 1"		571465	429,00
	US 1 ¼"		571470	429,00
	US 1 ½"		571475	429,00
WATTS RADIANT	U 16 (½")		570765	353,00
	U 20 (¾")		570775	353,00
Watts RadiantPEX-AL	U 25 (¾")		570780	353,00
	U 32 (1")		570785	414,00
Wavin Tigris K1/M1	U 50		570795	605,00
	U 63 (PR-3B)	Z4	572837 R	1.490,00
	U 63 (PZ-S)		572365	1.310,00
Wavin Tigris K5/M5	U 75 (PR-3B)	Z4	572828 R	1.310,00
	B 16"		570850	412,00
	B 20"		570860	412,00
	B 32		570880	454,00
	H 16"		570320	340,00
	H 20"		570350	340,00
	H 25"		570360	340,00
	H 32		570380	340,00
	H 40 (PZ-4G)		570390	1.150,00
	TH 16"		570460	377,00
	TH 20"		570470	377,00
	TH 25"		570495	377,00
	TH 32		570480	377,00
TH 40		570485	500,00	
TH 16 S (PR-2B)**	Z8	574782 R	252,00	
TH 20 S (PR-2B)**	Z8	574788 R	252,00	
TH 25 S (PR-2B)**	Z8	574792 R	252,00	
TH 32 S (PR-2B)	Z8	574798 R	277,00	
U 16"		570765	353,00	
U 20"		570775	353,00	
U 25"		570780	353,00	
U 32		570785	414,00	
U 40		570790	504,00	
UP 16"		572632	353,00	
UP 20"		572636	353,00	
UP 25		572638	353,00	
UP 32		572640	414,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM
WEICON	M 15		570110	313,00
PRESS-C-Stahl	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PZ-4G)		570160	1.010,00
	M 54 (PZ-4G)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
WEICON	M 15		570110	313,00
PRESS-Edelstahl	M 18		570120	313,00
	M 22		570130	313,00
	M 28		570140	313,00
	M 35		570150	313,00
	M 42 (PZ-4G)		570160	1.010,00
	M 54 (PZ-4G)		570170	1.010,00
	M 42 (PR-3S)	Z2	572706 R	1.370,00
	M 54 (PR-3S)	Z2	572708 R	1.370,00
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	2.350,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	2.750,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	2.750,00
	M 15 S (PR-2B)	Z8	574738 R	252,00
	M 18 S (PR-2B)	Z8	574740 R	252,00
	M 22 S (PR-2B)	Z8	574742 R	252,00
	M 28 S (PR-2B)	Z8	574744 R	252,00
	M 35 S (PR-2B)	Z8	574746 R	277,00
WEICON	V 15		570115	313,00
PRESS-Kupfer	V 18		570125	313,00
	V 22		570135	313,00
	V 28		570145	313,00
	V 35		570155	313,00
	V 42		570165	729,00
	V 42 (PR-2B)	Z2	572850 R	653,00
	V 54		570175	750,00
	V 54 (PR-2B)	Z2	572851 R	706,00
	V 15 S (PR-2B)	Z8	574752 R	252,00
	V 18 S (PR-2B)	Z8	574756 R	252,00
	V 22 S (PR-2B)	Z8	574758 R	252,00
	V 28 S (PR-2B)	Z8	574760 R	252,00
	V 35 S (PR-2B)	Z8	574762 R	277,00
WEM	U 16*		570765	353,00
WIELAND-WERKE cuprotherm CTX ²⁾	TH 14 ²⁾		570455	377,00
	TH 16 ²⁾		570460	377,00
WKS-Press	TH 14*		570455	377,00
	TH 16*		570460	377,00
	TH 17*		570462	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
WÜRTH	TH 16*		570460	377,00
Würth	TH 20*		570470	377,00
	TH 26*		570475	377,00
	HE 32		571900	452,00
	HEz 40		571904	655,00

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	KM
X				
XtraConnect	F 16*		570717	359,00
	F 20*		570727	359,00
	F 26*		570730	389,00
	F 32		570735	389,00
	F 16 S (PR-2B)**	Z8	574728 R	252,00
	F 20 S (PR-2B)**	Z8	574730 R	252,00
	F 26 S (PR-2B)**	Z8	574732 R	252,00
	F 32 S (PR-2B)	Z8	574734 R	277,00
	H 16*		570320	340,00
	H 20*		570350	340,00
	H 26*		570370	340,00
	H 32		570380	340,00
	TH 16*		570460	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
	U 16*		570765	353,00
	U 20*		570775	353,00
(DN 26)	U 25*		570780	353,00
	U 32		570785	414,00
	VP 16*		570910	376,00
	VP 20*		570915	376,00
	VP 32		570925	416,00
Z				
ZEWOTHERM	TH 12*		570452	377,00
Zewo Press Premium	TH 16*		570460	377,00
	TH 17*		570462	377,00
	TH 18*		570465	377,00
	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 40		570485	500,00
	TH 50 (PZ-S)		572400	1.310,00
	TH 63 (PZ-S)		572405	1.310,00
	TH 12 S (PR-2B)**	Z8	574776 R	252,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 17 S (PR-2B)**	Z8	574784 R	252,00
	TH 18 S (PR-2B)**	Z8	574786 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
ZEWOTHERM	TH 16*		570460	377,00
Zewo Press PPSU	TH 20*		570470	377,00
	TH 26*		570475	377,00
	TH 32		570480	377,00
	TH 16 S (PR-2B)**	Z8	574782 R	252,00
	TH 20 S (PR-2B)**	Z8	574788 R	252,00
	TH 26 S (PR-2B)**	Z8	574794 R	252,00
	TH 32 S (PR-2B)	Z8	574798 R	277,00
ZURN	US 3/8**		571450	429,00
INDUSTRIES	US 1/2**		571455	429,00
ZURN PEX	US 3/4**		571460	429,00
	US 1**		571465	429,00
	US 1 1/4**		571470	429,00
	US 1 1/2**		571475	429,00
	US 2**		571477	578,00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

For REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

Description	Art.-No.	KM
Adapter tongs Z8 for driving REMS pressing rings S (PR-2B)	574702R	292,00
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795R	292,00
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801RX	628,00
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802RX	628,00
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120R	756,00
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22V ACC	579123R	798,00
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1½")/cropping tongs and compartment for pipe cutter up to 42 mm	570295R	196,00
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40 A, VUS 1½", VUS 2")	570290R	196,00
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810R	196,00
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/VUSFz 2½–4" (PR-3B) or for adapter tongs Z5 and 1 pressing tong VMPz 1½ (PZ-S) and 2 pressing rings VMPz 1½–2" (PR-3B)	572809R	223,00
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516R	196,00
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704R	296,00
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings S (PR-2B)	571136R	296,00
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137R	296,00
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603R	502,00
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813R	112,00

