

REMS Turbo K

Universal circular metal sawing machine with automatic cooling lubricant unit

Compact, mobile, universal circular metal sawing machine for installation, metal working and industry. For job site and workshop.

| | | | | | | | |
|-------|----|----|---------|---------|----|----|---------|
| ↶ | ○ | □ | ▭ | └ | ● | ■ | ■ |
| 90° ⊕ | 78 | 55 | 70 × 50 | 50 × 50 | 40 | 40 | 50 × 30 |
| 45° ⊕ | 60 | 55 | 60 × 40 | 50 × 50 | 40 | 40 | 50 × 30 |

REMS saw blade Ø 225 mm

REMS Turbo K – the most powerful in its class.
Progressive drive, e.g. 2" steel pipe in only 5 s.
Easy to transport.

Design

Compact, robust, job site-proven. Small in size, handy, portable, complete only 22 kg. Automatic cooling lubricant unit. Easy sawing through favourable leverage effect. Fast saw blade change. Precise sawing. For workbench, stand or wheel stand as an accessory, for easy transport, optimum working height and stable positioning.

Universal vice

Robust, easy-running universal vice with strong clamping spindle and large clamping lever for effortless, secure clamping of the material. Standard with clamp insert for thin-walled pipes. Quick setting of bevel angle thanks to clearly laid out scale and clamping lever. Simple, sturdy length stop.

Drive


Robust, maintenance-free gear, precisely mounted in roller and needle bearings. Proven universal motor, 1200 W. Extremely strong and powerful, e.g. 2" steel pipe in only 5 s. Ideal speed 115 rpm for fast and smooth sawing.

REMS saw blades

Top German quality. REMS universal circular saw blade HSS 225 × 2 × 32 mm for metal, 120 teeth, adjusted to the efficiency of REMS Turbo K. Specially toothed, hardened and ground. For easy and exact sawing. REMS universal circular saw blade HSS 225 × 2 × 32 mm, 220 teeth, adjusted for sawing stainless steel. Specially fine-toothed, hardened and ground. For an even better durability, REMS universal circular saw blade HSS-E (cobalt alloyed) 225 × 2 × 32 mm, 220 teeth. Specially fine-toothed, hardened and ground.

Kühlschmierstoffe

REMS Sanitol and REMS Spezial (page 47). High lubricating and cooling effect. Essential for clean cuts, long service life of saw blades and machine.

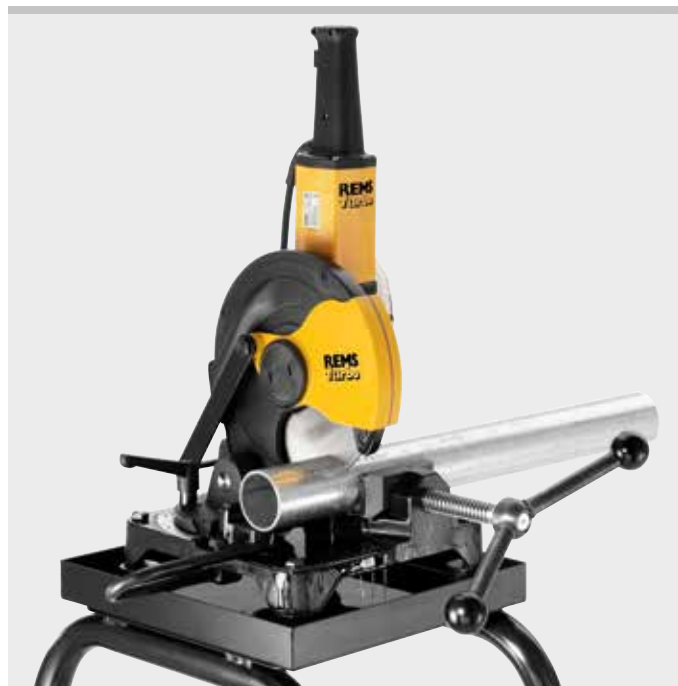

German Quality Product



Info

Supply format

REMS Turbo K Basic. Universal circular metal sawing machine with automatic cooling lubricant unit. For straight cuts and bevel cuts up to 45°. For REMS saw blade Ø 225 mm. Maintenance-free gear. Proven, powerful universal motor 230 V or 110 V, 50–60 Hz, 1200 W. Safety tip switch, saw blade protection cover, length stop. Clamp insert for thin-walled pipes. Speed 115 rpm. Ring spanner. Hexagon key. 1 filling of cooling lubricant REMS Spezial. Without saw blade. For workbench, stand or wheel stand. In a carton.

| | Art.-No. | KM |
|--|------------|----------|
| | 849007R220 | 3.270,00 |

Other voltages on request.

Accessories

| Description | Art.-No. | KM |
|--|------------|--------|
| REMS universal circular saw blade HSS for metal, 225 × 2 × 32 mm, 120 teeth | 849700R | 389,00 |
| REMS circular saw blade HSS for metal , fine-toothed, 225 × 2 × 32 mm, 220 teeth | 849703R | 450,00 |
| REMS circular saw blade HSS-E (cobalt alloyed) for metal, fine-toothed, 225 × 2 × 32 mm, 220 teeth. Very long service life. | 849706R | 626,00 |
| Electronic speed regulator for hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes. Fixed, optimum speed. | 565051R220 | 565,00 |
| Cooling lubricants see page 47. | | |
| Stand | 849315R | 439,00 |
| Wheel stand | 849310R | 712,00 |
| REMS Jumbo , folding workbenches, see page 106. | | |
| REMS Herkules , material supports, see page 107. | | |

