

REMS RAS Cu-INOX

Pipe cutters

Robust quality tools for cutting tubes.
Particularly suited for cutting stainless steel tubes.

Copper tubes, thin-walled
stainless steel tubes, thin-walled
steel, aluminium, brass tubes Ø 3 – 120 mm
Ø 1/8 – 4"

REMS RAS Cu-INOX – for places with difficult access.

Small, handy, specially for use in restricted spaces.
Robust design and hardened back pressure rollers provide exact alignment to the tube and a long service life.

Large operating knob in metal for easy in-feed and cutting.
Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 3–28 S Mini with needle bearing cutter wheel and needle bearing counter-pressure rollers for very easy cutting.



Supply format

REMS RAS Cu-INOX. Pipe cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	€
Cu-INOX 3–16	3–16 1/8–5/8"	4	113200R	28,55
Cu-INOX 3–25	3–25 1/8–1"	4	113230R	34,57
Cu-INOX 3–28 Mini	3–28 1/8–1 1/8"	4	113240R	39,55
Cu-INOX 3–28 S Mini on needle bearings	3–28 1/8–1 1/8"	4	113241R	55,74



Info



REMS RAS Cu-INOX – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.
Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.


Ergonomic, handy operating knob in metal for easy work and long service life.
Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 3–35 S with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.

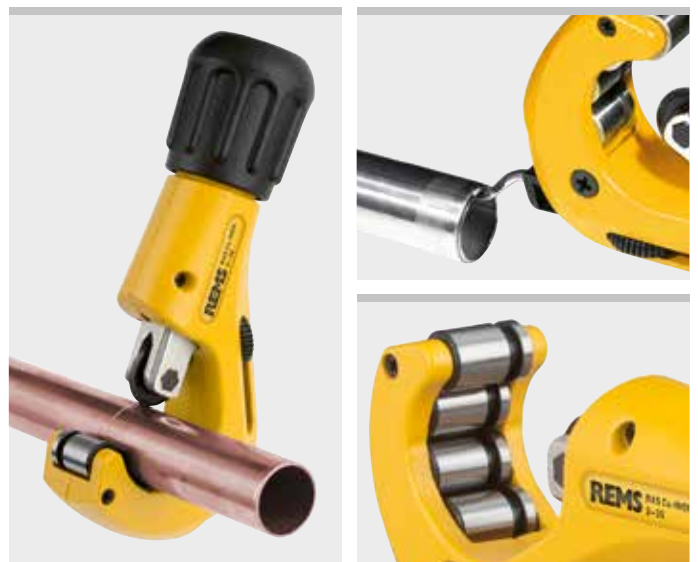

Supply format

REMS RAS Cu-INOX. Pipe cutting machine for copper pipes, thin-walled stainless steel pipes, thin-walled steel-aluminium pipes, brass pipes, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	€
Cu-INOX 3–35	3–35 1/8–1 3/8"	4	113350R	61,14
Cu-INOX 3–35 S on needle bearings	3–35 1/8–1 3/8"	4	113351R	81,90
Cu-INOX 3–42	3–42 1/8–1 3/4"	4	113330R	76,71



REMS RAS Cu-INOX – quality pipe cutter.

Robust, solid design for heavy-duty application.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 8–64 S and REMS RAS Cu-INOX 8–42 S with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting. Quick adjustment of the engagement spindle in both directions.

Only 1 cutter wheel for the complete working capacity \varnothing 3–120 mm.



Supply format

REMS RAS Cu-INOX. Pipe cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack/in box.

Description	Pipes \varnothing mm/inch	Wall thickness s ≤ mm	Art.-No.	€
Cu-INOX 3–28	3–28 1/8–1 1/8"	4	113300R	33,63
Cu-INOX 6–42	6–42 1/4–1 5/8"	4	113380R	158,81
Cu-INOX 8–42 S on needle bearings, with quick adjustment	8–42 3/8–1 5/8"	4	113385R	163,49
Cu-INOX 6–64	6–64 1/4–2 1/2"	4	113400R	185,80
Cu-INOX 8–64 S on needle bearings, with quick adjustment	8–64 3/8–2 1/2"	4	113401R	206,56
Cu-INOX 64–120	64–120 2 1/2–4"	4	113500R	268,84

Accessories

Description	Wall thick- ness s ≤ mm	Art.-No.	€
REMS cutter wheel Cu-INOX 3–120, s 4	4	113210R	12,04
REMS cutter wheel Cu-INOX 3–120 S, s 4, on needle bearings	4	113213R	21,07
Universal deburring blade, ground		113360	7,89



German Quality Products

