

Robust quality tools for cutting tubes.

Copper tubes

Ø 3 – 64 mm
Ø 1/8 – 2 1/2"

REMS RAS Cu – for places with difficult access.

Small, handy, specially for use in restricted spaces.

Robust design and hardened back pressure rollers provide exact alignment to the tube and a long service life.

Large operating knob in metal for easy in-feed and cutting.

Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.



Supply format

REMS RAS Cu. Pipe cutter for copper tubes. With cutter wheel. In blister pack.

| Description | Pipes Ø mm/inch | Wall thickness s ≤ mm | Art.-No. | € |
|------------------|------------------------|--------------------------|----------|--------------|
| Cu 3 – 16 | 3 – 16 1/8 – 5/8" | 3 | 113250R | 30,30 |
| Cu 3 – 25 | 3 – 25 1/8 – 1" | 3 | 113255R | 36,70 |
| Cu 3 – 28 | 3 – 28 1/8 – 1 1/8" | 3 | 113260R | 42,00 |



REMS RAS Cu – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.


Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.



Supply format

REMS RAS Cu. Pipe cutter for copper tubes, with integrated pipe deburring device. With cutter wheel. In blister pack.

| Description | Pipes Ø mm/inch | Wall thickness s ≤ mm | Art.-No. | € |
|------------------|------------------------|--------------------------|----------|--------------|
| Cu 3 – 35 | 3 – 35 1/8 – 1 3/8" | 3 | 113340R | 61,60 |
| Cu 3 – 42 | 3 – 42 1/8 – 1 3/4" | 3 | 113320R | 73,90 |



REMS RAS Cu

Pipe cutters

REMS RAS Cu – quality pipe cutter. With quick adjustment.

Solid, handy, U-shaped design.



Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe, easy in-feed, easy cutting and precise, right angle cut. Ergonomic, handy operating knob in metal for easy work and long service life.

Ratchet for quick adjustment in both directions.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Only 1 cutter wheel for the complete working capacity Ø 3 – 120 mm.

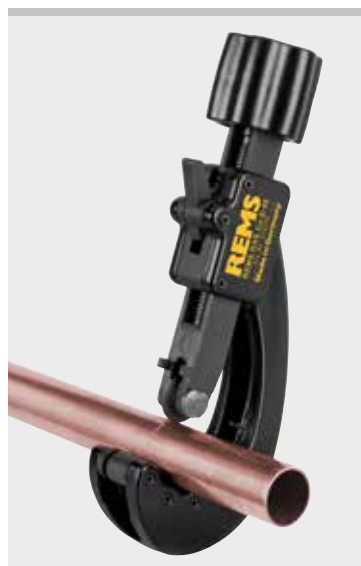

German Quality Products

Supply format

REMS RAS Cu. Pipe cutter for copper tubes. With cutter wheel. In blister pack/in box.

| Description | Pipes Ø mm/inch | Wall thickness s ≤ mm | Art.-No. | € |
|---|------------------------|--------------------------|----------|---------------|
| Cu 8 – 42 with quick adjustment | 8 – 42 3/8 – 1 5/8" | 3 | 113370R | 164,00 |
| Cu 8 – 64 with quick adjustment | 8 – 64 3/8 – 2 1/2" | 3 | 113410R | 197,00 |

Accessories

| Description | Wall thick- ness s ≤ mm | Art.-No. | € |
|--|----------------------------|----------|--------------|
| REMS cutter wheel Cu 3 – 120, s 3 | 3 | 113225R | 12,80 |
| Universal deburring blade, ground | | 113360 | 8,40 |

International
Design Award



REMS RAS P

Pipe cutters

REMS RAS P – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.


Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.



Supply format

REMS RAS P. Pipe cutter for plastic pipes and multi-layer composite tubes, with integrated pipe deburring device. With cutter wheel. In blister pack.

| Description | Pipes Ø mm/inch | Wall thickness s ≤ mm | Art.-No. | € |
|--------------------|-------------------------|--------------------------|----------|--------------|
| P 10 – 32 T | 10 – 32 1/2 – 1 3/8" | 4,5 | 290001R | 61,60 |
| P 10 – 40 T | 10 – 40 1/2 – 1 5/8" | 4,5 | 290002R | 73,90 |

