

for all common pressfitting systems

**Select REMS pressing tongs/
REMS pressing rings yourself!**

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 238) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press (page 185) using the adapter tong Z8.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (Patent EP 2 027 971).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Adapter tongs required, see page 238.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 238. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing ring (PR-2B)

REMS pressing ring (PR-2B) with 2 pressing jaws, for secure engagement of the pressing jaws in tight spaces, for midsize dimensions. Adapter tongs required for driving the REMS (PR-2B) pressing rings, see page 238.

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 238.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Confirmation of suitability

See page 239.

Hold-Harmless and Indemnification Agreement

See page 240.



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)




REMS pressing rings (PR-2B)



REMS pressing ring S (PR-2B), continuously swivellable

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

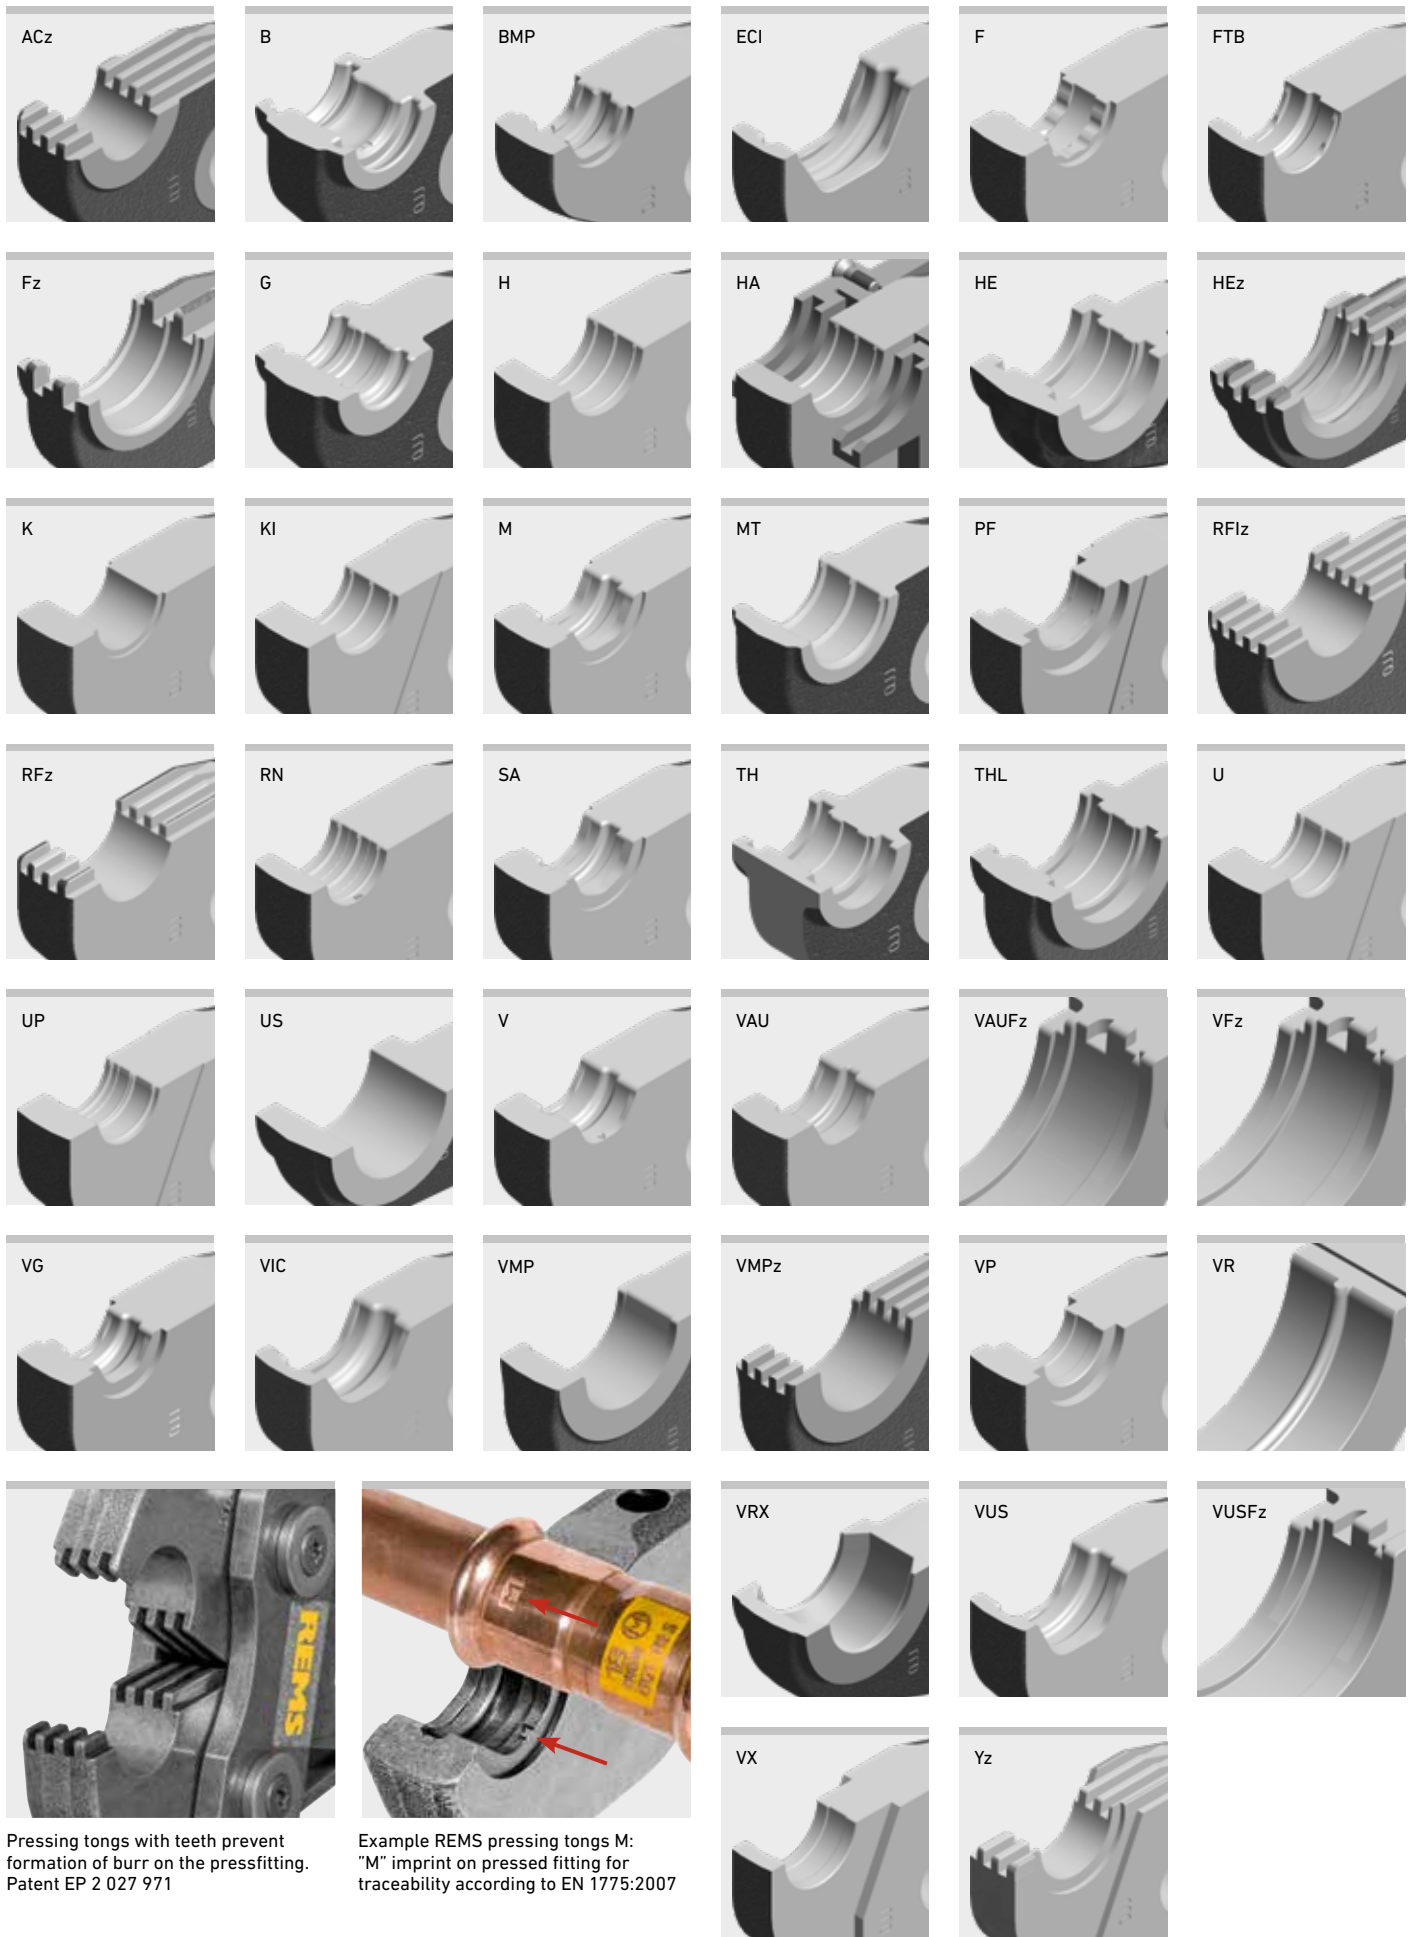

Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs M: "M" imprint on pressed fitting for traceability according to EN 1775:2007

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
AC-FIX PRESS (Global Piping Systems)	H 12*		570300	177,00	AHLSELL A-press elförzinkad V	V 12		570107	163,00	
	H 16*		570320	177,00		V 15		570115	163,00	
	H 20*		570350	177,00		V 18		570125	163,00	
	H 25*		570360	177,00		V 22		570135	163,00	
	H 32		570380	177,00		V 28		570145	163,00	
	RFz 12*		571320	204,00		V 35		570155	163,00	
	RFz 16*		571325	204,00		V 42		570165	379,00	
	RFz 20*		571330	204,00		V 54		570175	390,00	
	RFz 25		571335	204,00		V 12 S (PR-2B)	Z8	574748 R	131,00	
	RFz 32		571340	204,00		V 15 S (PR-2B)	Z8	574752 R	131,00	
	U 16*		570765	184,00		V 18 S (PR-2B)	Z8	574756 R	131,00	
	U 20*		570775	184,00		V 22 S (PR-2B)	Z8	574758 R	131,00	
	U 25*		570780	184,00		V 28 S (PR-2B)	Z8	574760 R	131,00	
	U 32		570785	215,00		V 35 S (PR-2B)	Z8	574762 R	144,00	
	VX 16*		571635	226,00		AHLSELL	M 12		570100	163,00
	VX 20*		571640	226,00		A-press koppar M	M 15		570110	163,00
	AC-FIX PRESS DUO (Global Piping Systems)	RFz 16*		571325		204,00	M 18		570120	163,00
		RFz 20*		571330		204,00	M 22		570130	163,00
		RFz 25		571335		204,00	M 28		570140	163,00
		RFz 32		571340		204,00	M 35		570150	163,00
TH 16*			570460	196,00	M 42 (PR-3S)	Z2	572706 R	710,00		
TH 20*			570470	196,00	M 54 (PR-3S)	Z2	572708 R	710,00		
TH 25*			570495	196,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		
TH 26*			570475	196,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		
TH 32			570480	196,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		
TH 16 S (PR-2B)**		Z8	574782 R	131,00	M 15 S (PR-2B)	Z8	574738 R	131,00		
TH 20 S (PR-2B)**		Z8	574788 R	131,00	M 18 S (PR-2B)	Z8	574740 R	131,00		
TH 25 S (PR-2B)**		Z8	574792 R	131,00	M 22 S (PR-2B)	Z8	574742 R	131,00		
TH 26 S (PR-2B)**		Z8	574794 R	131,00	M 28 S (PR-2B)	Z8	574744 R	131,00		
TH 32 S (PR-2B)		Z8	574798 R	144,00	M 35 S (PR-2B)	Z8	574746 R	144,00		
U 16*			570765	184,00	AHLSELL	V 12		570107	163,00	
U 20*			570775	184,00	A-press koppar V	V 15		570115	163,00	
U 25*			570780	184,00	V 18		570125	163,00		
U 32			570785	215,00	V 22		570135	163,00		
AC-FIX PRESS-MULTI (Global Piping Systems)		H 16*		570320	177,00	V 28		570145	163,00	
		H 18*		570340	177,00	V 35		570155	163,00	
	H 20*		570350	177,00	V 42		570165	379,00		
	H 25*		570360	177,00	V 54		570175	390,00		
	H 32		570380	177,00	V 12 S (PR-2B)	Z8	574748 R	131,00		
	RFz 16*		571325	204,00	V 15 S (PR-2B)	Z8	574752 R	131,00		
	RFz 20*		571330	204,00	V 18 S (PR-2B)	Z8	574756 R	131,00		
	RFz 25		571335	204,00	V 22 S (PR-2B)	Z8	574758 R	131,00		
	RFz 32		571340	204,00	V 28 S (PR-2B)	Z8	574760 R	131,00		
	U 16*		570765	184,00	V 35 S (PR-2B)	Z8	574762 R	144,00		
	U 18*		570770	184,00	AHLSELL	M 15		570110	163,00	
	U 20*		570775	184,00	A-press rostfritt	M 18		570120	163,00	
	U 25*		570780	184,00	M 22		570130	163,00		
	U 32		570785	215,00	M 28		570140	163,00		
	ACOME MT	ACz 12*		572642	204,00	M 35		570150	163,00	
		ACz 16*		572644	204,00	M 42 (PR-3S)	Z2	572706 R	710,00	
		ACz 20*		572646	204,00	M 54 (PR-3S)	Z2	572708 R	710,00	
		ACz 25		572648	204,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
						M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	AHLSELL A-press elförzinkad M	M 12		570100	163,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
M 15			570110	163,00	M 15 S (PR-2B)	Z8	574738 R	131,00		
M 18			570120	163,00	M 18 S (PR-2B)	Z8	574740 R	131,00		
M 22			570130	163,00	M 22 S (PR-2B)	Z8	574742 R	131,00		
M 28			570140	163,00	M 28 S (PR-2B)	Z8	574744 R	131,00		
M 35			570150	163,00	M 35 S (PR-2B)	Z8	574746 R	144,00		
M 42 (PR-3S)		Z2	572706 R	710,00	AIRBEL	M 15		570110	163,00	
M 54 (PR-3S)		Z2	572708 R	710,00	PRESSCLIM	M 18		570120	163,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	M 22		570130	163,00		
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	M 28		570140	163,00		
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	M 35		570150	163,00		
M 12 S (PR-2B)		Z8	574736 R	131,00	M 42 (PR-3S)	Z2	572706 R	710,00		
M 15 S (PR-2B)		Z8	574738 R	131,00	M 54 (PR-3S)	Z2	572708 R	710,00		
M 18 S (PR-2B)		Z8	574740 R	131,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		
M 22 S (PR-2B)		Z8	574742 R	131,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		
M 28 S (PR-2B)	Z8	574744 R	131,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00			
M 35 S (PR-2B)	Z8	574746 R	144,00	M 15 S (PR-2B)	Z8	574738 R	131,00			

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
AIRBEL	M 15		570110	163,00
SERTINOX	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
ALB	TH 16*		570460	196,00
Sistema Multicapa para calefacción y sanitario	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	H 40 (PZ-4G)		570390	600,00
	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00
	U 40		570790	262,00
ALB	TH 16*		570460	196,00
Sistema Multicapa para Gas	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00
ALTECH Altech	Rfz 12*		571320	204,00
	Rfz 16*		571325	204,00
	Rfz 20*		571330	204,00
	Rfz 25		571335	204,00
APE MULTYGAS Serie AP Gas	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
APE Serie AP	B 16*		570850	214,00
	B 20*		570860	214,00
	B 26		570870	236,00
	B 32		570880	236,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
APE Serie APL	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
AQUATECHNIK Press-fitting metal	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00
AQUATECHNIK Universal	B 16*		570850	214,00
	B 20*		570860	214,00
	B 26		570870	236,00
	B 32		570880	236,00
	F 16*		570717	187,00
	F 20*		570727	187,00
	F 26*		570730	202,00
	F 32		570735	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00
	F 32 S (PR-2B)	Z8	574734 R	144,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00
ARKA DUROsystem	H 16*		570320	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
Aschl NIR	M 15		570110	163,00
	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
ASSOTHERM IPC-RAC Carbon Steel	M 15		570110	163,00	ASSOTHERM IPR-RRR Copper	M 15		570110	163,00
	M 18		570120	163,00		M 18		570120	163,00
	M 22		570130	163,00		M 22		570130	163,00
	M 28		570140	163,00		M 28		570140	163,00
	M 35		570150	163,00		M 35		570150	163,00
	M 42 (PZ-4G)		570160	530,00		M 42 (PZ-4G)		570160	530,00
	M 54 (PZ-4G)		570170	530,00		M 54 (PZ-4G)		570170	530,00
	M 42 (PR-3S)	Z2	572706 R	710,00		M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00		M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00		M 22 S (PR-2B)	Z8	574742 R	131,00
M 28 S (PR-2B)	Z8	574744 R	131,00	M 28 S (PR-2B)	Z8	574744 R	131,00		
M 35 S (PR-2B)	Z8	574746 R	144,00	M 35 S (PR-2B)	Z8	574746 R	144,00		
ASSOTHERM IPI-RAX Inox	M 15		570110	163,00	ASSOTHERM IPR-RRR Copper Gas	M 15		570110	163,00
	M 18		570120	163,00		M 18		570120	163,00
	M 22		570130	163,00		M 22		570130	163,00
	M 28		570140	163,00		M 28		570140	163,00
	M 35		570150	163,00		M 35		570150	163,00
	M 42 (PZ-4G)		570160	530,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	M 54 (PZ-4G)		570170	530,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	M 42 (PR-3S)	Z2	572706 R	710,00		M 22 S (PR-2B)	Z8	574742 R	131,00
	M 54 (PR-3S)	Z2	572708 R	710,00		M 28 S (PR-2B)	Z8	574744 R	131,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		M 35 S (PR-2B)	Z8	574746 R	144,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8"	571450	223,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00			US 1/2"	571455	223,00
	M 15 S (PR-2B)	Z8	574738 R	131,00			US 3/4"	571460	223,00
	M 18 S (PR-2B)	Z8	574740 R	131,00			US 1"	571465	223,00
	M 22 S (PR-2B)	Z8	574742 R	131,00			US 1 1/4"	571470	223,00
M 28 S (PR-2B)	Z8	574744 R	131,00		US 1 1/2"	571475	223,00		
M 35 S (PR-2B)	Z8	574746 R	144,00		US 2"	571477	300,00		
ASSOTHERM IPI-RAX Inox Gas	M 15		570110	163,00	ATUSA ITALIA	M 15		570110	163,00
	M 18		570120	163,00	INSTALPRESS	M 18		570120	163,00
	M 22		570130	163,00	CARBON STEEL	M 22		570130	163,00
	M 28		570140	163,00	PRESS FITTINGS	M 28		570140	163,00
	M 35		570150	163,00		M 35		570150	163,00
	M 42 (PZ-4G)		570160	530,00	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PZ-4G)		570170	530,00	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
M 28 S (PR-2B)	Z8	574744 R	131,00	ATUSA ITALIA	M 15		570110	163,00	
M 35 S (PR-2B)	Z8	574746 R	144,00	INSTALPRESS	M 18		570120	163,00	
ASSOTHERM IPM-Multistrato	H 16*		570320	177,00	STAINLESS STEEL	M 22		570130	163,00
	H 20*		570350	177,00	PRESS FITTINGS	M 28		570140	163,00
	H 26*		570370	177,00		M 35		570150	163,00
	H 32		570380	177,00	M 42 (PR-3S)	Z2	572706 R	710,00	
	TH 16*		570460	196,00	M 54 (PR-3S)	Z2	572708 R	710,00	
	TH 20*		570470	196,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	TH 26*		570475	196,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	TH 32		570480	196,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	THL 32		570487	196,00	M 15 S (PR-2B)	Z8	574738 R	131,00	
	TH 40		570485	260,00	M 18 S (PR-2B)	Z8	574740 R	131,00	
	TH 50 (PZ-S)		572400	680,00	M 22 S (PR-2B)	Z8	574742 R	131,00	
	TH 63 (PZ-S)		572405	680,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	AUSTEC	TH 16*		570460	196,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	PEX-B, PEX-AL-PEX (AUS)	TH 20*		570470	196,00
TH 32 S (PR-2B)	Z8	574798 R	144,00		TH 25*		570495	196,00	
U 16*		570765	184,00		TH 32		570480	196,00	
U 20*		570775	184,00		U 16*		570765	184,00	
U 26* ¹²⁾		570750	215,00		U 20*		570775	184,00	
U 32		570785	215,00		U 25*		570780	184,00	
					U 32		570785	215,00	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88,9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 32		570480	196,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
AYOR FIXOCONNECT Press	H 12*		570300	177,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	Rfz 12*		571320	204,00
	Rfz 16*		571325	204,00
	Rfz 20*		571330	204,00
	Rfz 25		571335	204,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
AYOR FIXOMULTIX	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
U 63 (PR-3B)	Z4	572837 R	780,00	
U 63 (PZ-S)		572365	680,00	
U 75 (PR-3B)	Z4	572828 R	680,00	
AYOR SOMATHERM FOR YOU -1	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	U 16*		570765	184,00
U 20*		570775	184,00	
AYOR SOMATHERM FOR YOU -2	H 12*		570300	177,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	Rfz 12*		571320	204,00
	Rfz 16*		571325	204,00
	Rfz 20*		571330	204,00
	Rfz 25		571335	204,00
	U 16*		570765	184,00
	U 20*		570775	184,00
U 25*		570780	184,00	

B

Bampi BALPEX serie LP	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 26* ⁽¹²⁾		570750	215,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
U 63 (PR-3B)	Z4	572837 R	780,00	
U 63 (PZ-S)		572365	680,00	
Bampi BALPEX serie MP	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Bampi BALPEX Gas	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300	177,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 32		570380	177,00
	Rfz 12*		571320	204,00
	Rfz 16*		571325	204,00
	Rfz 20*		571330	204,00
	Rfz 25		571335	204,00
	Rfz 32		571340	204,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
U 32		570785	215,00	
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310	177,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	Rfz 16*		571325	204,00
	Rfz 18*		571327	204,00
	Rfz 20*		571330	204,00
	Rfz 25		571335	204,00
	Rfz 32		571340	204,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
TH 20 S (PR-2B)**	Z8	574788 R	131,00	
TH 26 S (PR-2B)**	Z8	574794 R	131,00	
TH 32 S (PR-2B)	Z8	574798 R	144,00	
U 16*		570765	184,00	
U 18*		570770	184,00	
U 20*		570775	184,00	
U 25*		570780	184,00	
U 32		570785	215,00	
U 40		570790	262,00	
U 50		570795	314,00	
U 63 (PR-3B)	Z4	572837 R	780,00	
U 63 (PZ-S)		572365	680,00	
BEGETUBE/ IVAR	B 14*		570845	214,00
	B 16*		570850	214,00
	B 18*		570855	214,00
	B 20*		570860	214,00
	B 26		570870	236,00
	B 32		570880	236,00
	Fz 40		570742	216,00
	Fz 50		570747	327,00
	F 63 (PZ-S)		572385	680,00
	Fz 75 (PR-3B)	Z4	572830 R	640,00
	Béné inox Série 41	M 15		570110
M 18			570120	163,00
M 22			570130	163,00
M 28			570140	163,00
M 35			570150	163,00
M 42 (PR-3S)		Z2	572706 R	710,00
M 54 (PR-3S)		Z2	572708 R	710,00
M 76,1 XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.220,00
M 88,9 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.430,00
M 108,0 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.430,00
Brass Form Master-Al-Pex	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
Brass & Fittings PRESSMAN MultiPress	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	Rfz 16*		571325	204,00
	Rfz 18*		571327	204,00
	Acz 20*		572646	204,00
Brass & Fittings PRESSMAN RetiPress	Rfz 25		571335	204,00
	Rfz 32		571340	204,00
	Rfz 16*		571325	204,00
	Rfz 18*		571327	204,00
	Acz 20*		572646	204,00
	Rfz 25		571335	204,00
Rfz 32		571340	204,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
BRASSTECH MULTitermoSAN Brasspress	B 16*		570850	214,00
	B 20*		570860	214,00
	B 26		570870	236,00
	B 32		570880	236,00
	F 16*		570717	187,00
	F 20*		570727	187,00
	F 26*		570730	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00

C

Cello Products -B- Press	VUS ½" (OD 15,9 mm)		571770	197,00
	VUS ¾" (OD 22,2 mm)		571775	197,00
	VUS 1" (OD 28,6 mm)		571780	197,00
	VUS 1¼" (OD 34,9 mm)		571785	197,00
	VUS 1½" (OD 41,3 mm)		571790	379,00
CGR DYNAFLU multicouche	VUS 2" (OD 54,0 mm)		571795	390,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00
U 40		570790	262,00	
U 50		570795	314,00	
U 63 (PR-3B)	Z4	572837 R	780,00	
U 63 (PZ-S)		572365	680,00	
CGR DYNAFLU PER	H 12*		570300	177,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	RFz 12*		571320	204,00
	RFz 16*		571325	204,00
	RFz 20*		571330	204,00
	RFz 25		571335	204,00

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
CHIALI CHIALIPEX	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 63 (PZ-S)		572405	680,00	
	Climatrix Climatrix Rhinopex	H 16*		570320	177,00
		H 20*		570350	177,00
		U 16*		570765	184,00
		U 20*		570775	184,00
		U 26* ¹²⁾		570750	215,00
		TH 14*		570455	196,00
		TH 16*		570460	196,00
		TH 18*		570465	196,00
TH 20*			570470	196,00	
TH 26*			570475	196,00	
Climatrix Variotherm	TH 32		570480	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	System TH	TH 11,6*		570482	196,00
		TH 16*		570460	196,00
		TH 16 S (PR-2B)**	Z8	574782 R	131,00
	ClouSet	TH 16*		570460	196,00
		TH 18*		570465	196,00
TH 20*			570470	196,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 18 S (PR-2B)**		Z8	574786 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
Comap PEX Press		RFz 12*		571320	204,00
		RFz 16*		571325	204,00
	RFz 20*		571330	204,00	
	RFz 25		571335	204,00	
	Comap Multiskin	TH 14*		570455	196,00
TH 16*			570460	196,00	
TH 18*			570465	196,00	
TH 20*			570470	196,00	
TH 26*			570475	196,00	
TH 32			570480	196,00	
THL 32			570487	196,00	
TH 40			570485	260,00	
TH 50 (PZ-S)			572400	680,00	
TH 63 (PZ-S)			572405	680,00	
THz 75 (PR-3B)		Z4	572829 R	640,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
TH 26 S (PR-2B)**		Z8	574794 R	131,00	
TH 32 S (PR-2B)		Z8	574798 R	144,00	
Comap Multiskin	U 14*		570760	184,00	
	U 16*		570765	184,00	
	U 18*		570770	184,00	
	U 20*		570775	184,00	
	U 32		570785	215,00	
	U 40		570790	262,00	
	U 50		570795	314,00	
	U 63 (PR-3B)	Z4	572837 R	780,00	
	U 63 (PZ-S)		572365	680,00	
	U 75 (PR-3B)	Z4	572828 R	680,00	
	H 14*		570310	177,00	
	H 16*		570320	177,00	
	H 18*		570340	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
H 32		570380	177,00		
H 40 (PZ-4G)		570390	600,00		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Comap Multiskin Gas	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	THL 32		570487	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	U 16*		570765	184,00	
	U 20*		570775	184,00	
	U 32		570785	215,00	
	H 16*		570320	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
	H 32		570380	177,00	
	COMISA Press System	TH 14*		570455	196,00
		TH 16*		570460	196,00
		TH 18*		570465	196,00
		TH 20*		570470	196,00
TH 25*			570495	196,00	
TH 26*			570475	196,00	
TH 32			570480	196,00	
TH 40			570485	260,00	
TH 50 (PZ-S)			572400	680,00	
TH 63 (PZ-S)			572405	680,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 18 S (PR-2B)**		Z8	574786 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
TH 25 S (PR-2B)**		Z8	574792 R	131,00	
TH 26 S (PR-2B)**		Z8	574794 R	131,00	
TH 32 S (PR-2B)		Z8	574798 R	144,00	
H 14*			570310	177,00	
H 16*			570320	177,00	
H 18*			570340	177,00	
H 20*			570350	177,00	
H 26*		570370	177,00		
H 32		570380	177,00		
B 14*		570845	214,00		
B 16*		570850	214,00		
B 18*		570855	214,00		
B 20*		570860	214,00		
B 26		570870	236,00		
B 32		570880	236,00		
COMISA Press System Gas	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	CONEL CONNECT INOX	M 15		570110	163,00
		M 18		570120	163,00
M 22			570130	163,00	
M 42 (PR-3S)		Z2	572706 R	710,00	
M 54 (PR-3S)		Z2	572708 R	710,00	
V 15			570115	163,00	
V 18			570125	163,00	
V 22			570135	163,00	
V 42 (PR-2B)		Z2	572850 R	339,00	
V 54 (PR-2B)		Z2	572851 R	367,00	
CONEL CONNECT MULTI	F 16*		570717	187,00	
	F 20*		570727	187,00	
	F 26*		570730	202,00	
	F 32		570735	202,00	
	F 16 S (PR-2B)**	Z8	574728 R	131,00	
	F 20 S (PR-2B)**	Z8	574730 R	131,00	
	F 26 S (PR-2B)**	Z8	574732 R	131,00	
	F 32 S (PR-2B)**	Z8	574734 R	144,00	
	H 16*		570320	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
	H 32		570380	177,00	
	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)**	Z8	574798 R	144,00	
(DN 26)	U 16*		570765	184,00	
	U 20*		570775	184,00	
	U 25*		570780	184,00	
	U 32		570785	215,00	
	VP 16*		570910	196,00	
	VP 20*		570915	196,00	
	VP 32		570925	216,00	
	CONEL CONNECT MV2	F 16*		570717	187,00
		F 20*		570727	187,00
		F 26*		570730	202,00
F 32			570735	202,00	
F 16 S (PR-2B)**		Z8	574728 R	131,00	
F 20 S (PR-2B)**		Z8	574730 R	131,00	
F 26 S (PR-2B)**		Z8	574732 R	131,00	
F 32 S (PR-2B)**		Z8	574734 R	144,00	
TH 16*			570460	196,00	
TH 20*			570470	196,00	
TH 26*		570475	196,00		
TH 32		570480	196,00		
TH 16 S (PR-2B)**	Z8	574782 R	131,00		
TH 20 S (PR-2B)**	Z8	574788 R	131,00		
TH 26 S (PR-2B)**	Z8	574794 R	131,00		
TH 32 S (PR-2B)**	Z8	574798 R	144,00		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Conex Bänninger <A> Press Inox (304)	M 15		570110	163,00
	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 35 (PR-3S)	Z2	572727 R	710,00
	M 42 (PZ-46)		570160	530,00
	M 54 (PZ-46)		570170	530,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
Conex Bänninger <A> Press Inox (316L)	M 15		570110	163,00
	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 35 (PR-3S)	Z2	572727 R	710,00
	M 42 (PZ-46)		570160	530,00
	M 54 (PZ-46)		570170	530,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
Conex Bänninger >B< Flex	F 16*		570717	187,00
	F 18*		570720	187,00
	F 20*		570727	187,00
	F 32		570735	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 32 S (PR-2B)	Z8	574734 R	144,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 32		570380	177,00
	Rfz 16*		571325	204,00
	Rfz 18*		571327	204,00
	Rfz 20*		571330	204,00
Rfz 25		571335	204,00	
Rfz 32		571340	204,00	
TH 16*		570460	196,00	
TH 18*		570465	196,00	
TH 20*		570470	196,00	
TH 25*		570495	196,00	
TH 32		570480	196,00	
TH 16 S (PR-2B)**	Z8	574782 R	131,00	
TH 18 S (PR-2B)**	Z8	574786 R	131,00	
TH 20 S (PR-2B)**	Z8	574788 R	131,00	
TH 25 S (PR-2B)**	Z8	574792 R	131,00	
TH 32 S (PR-2B)	Z8	574798 R	144,00	
U 16*		570765	184,00	
U 18*		570770	184,00	
U 20*		570775	184,00	
U 25*		570780	184,00	
U 32		570785	215,00	
Conex Bänninger >B< Flex Gas	F 16*		570717	187,00
	F 18*		570720	187,00
	F 20*		570727	187,00
	F 32		570735	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 32 S (PR-2B)	Z8	574734 R	144,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 32		570380	177,00
	Rfz 16*		571325	204,00
	Rfz 18*		571327	204,00
	Rfz 20*		571330	204,00
Rfz 25		571335	204,00	
Rfz 32		571340	204,00	
TH 16*		570460	196,00	
TH 18*		570465	196,00	
TH 20*		570470	196,00	
TH 25*		570495	196,00	
TH 32		570480	196,00	
TH 16 S (PR-2B)**	Z8	574782 R	131,00	
TH 18 S (PR-2B)**	Z8	574786 R	131,00	
TH 20 S (PR-2B)**	Z8	574788 R	131,00	
TH 25 S (PR-2B)**	Z8	574792 R	131,00	
TH 32 S (PR-2B)	Z8	574798 R	144,00	
U 16*		570765	184,00	
U 18*		570770	184,00	
U 20*		570775	184,00	
U 25*		570780	184,00	
U 32		570785	215,00	
Conex Bänninger >B< MaxiPro	BMP ¼"		571700 R	194,00
	BMP ⅜"		571702 R	194,00
	BMP ½"		571704 R	194,00
	BMP ⅝"		571706 R	194,00
	BMP ¾"		571708 R	194,00
	BMP 1"		571710 R	194,00
	BMP 1 1/8"		571712 R	194,00
	BMP 1 1/4"		571714 R	194,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
Conex Bänninger >B- Press	V 12		570107	163,00	Conex Bänninger >B- Press XL stainless	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.110,00	
	V 14		570112	163,00		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.220,00	
	V 15		570115	163,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	V 16		570117	163,00		CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	1.430,00	
	V 18		570125	163,00		CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	1.430,00	
	V 22		570135	163,00		Conex Bänninger >B- Press Solar	V 12		570107	163,00
	V 28		570145	163,00			V 14		570112	163,00
	V 35		570155	163,00			V 15		570115	163,00
	V 42		570165	379,00			V 16		570117	163,00
	V 54		570175	390,00			V 18		570125	163,00
	V 12 S (PR-2B)	Z8	574748 R	131,00			V 22		570135	163,00
	V 14 S (PR-2B)	Z8	574800 R	131,00			V 28		570145	163,00
	V 15 S (PR-2B)	Z8	574752 R	131,00			V 35		570155	163,00
	V 16 S (PR-2B)	Z8	574802 R	131,00	V 42			570165	379,00	
	V 18 S (PR-2B)	Z8	574756 R	131,00	V 54			570175	390,00	
	V 22 S (PR-2B)	Z8	574758 R	131,00	V 12 S (PR-2B)	Z8	574748 R	131,00		
	V 28 S (PR-2B)	Z8	574760 R	131,00	V 14 S (PR-2B)	Z8	574800 R	131,00		
	V 35 S (PR-2B)	Z8	574762 R	144,00	V 15 S (PR-2B)	Z8	574752 R	131,00		
	M 15		570110	163,00	V 16 S (PR-2B)	Z8	574802 R	131,00		
	M 22		570130	163,00	V 18 S (PR-2B)	Z8	574756 R	131,00		
	M 28		570140	163,00	V 22 S (PR-2B)	Z8	574758 R	131,00		
					V 28 S (PR-2B)	Z8	574760 R	131,00		
					V 35 S (PR-2B)	Z8	574762 R	144,00		
Conex Bänninger >B- Press XL copper	VFz 64,0 (PR-3B)	Z5	572815 R	640,00	Debrunner Acifer d-a Presssystem C-Stahl	M 12		570100	163,00	
	CBVFz 66,7 (PR-3B)	Z5	572847 R	640,00		M 15		570110	163,00	
	VFz 76,1 (PR-3B) ¹⁾	Z5	572816 R	640,00		M 18		570120	163,00	
	VFz 88,9 (PR-3B) ¹⁾	Z5	572817 R	680,00		M 22		570130	163,00	
	VFz 108,0 (PR-3B) ¹⁾	Z5	572818 R	680,00		M 28		570140	163,00	
Conex Bänninger >B- Press carbon	V 15		570115	163,00		M 35		570150	163,00	
	V 18		570125	163,00		M 42 (PR-3S)	Z2	572706 R	710,00	
	V 22		570135	163,00		M 54 (PR-3S)	Z2	572708 R	710,00	
	V 28		570145	163,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	V 35		570155	163,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	V 42		570165	379,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	V 42 (PR-2B)	Z2	572850 R	339,00		M 12 S (PR-2B)	Z8	574736 R	131,00	
	V 54		570175	390,00		M 15 S (PR-2B)	Z8	574738 R	131,00	
	V 54 (PR-2B)	Z2	572851 R	367,00	M 18 S (PR-2B)	Z8	574740 R	131,00		
	V 15 S (PR-2B)	Z8	574752 R	131,00	M 22 S (PR-2B)	Z8	574742 R	131,00		
	V 18 S (PR-2B)	Z8	574756 R	131,00	M 28 S (PR-2B)	Z8	574744 R	131,00		
	V 22 S (PR-2B)	Z8	574758 R	131,00	M 35 S (PR-2B)	Z8	574746 R	144,00		
	V 28 S (PR-2B)	Z8	574760 R	131,00	DUOPIPE SYSTEMS DUOFIL MKSYSTEM	U 16*		570765	184,00	
V 35 S (PR-2B)	Z8	574762 R	144,00	U 18*			570770	184,00		
XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.110,00	U 20*			570775	184,00		
XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.220,00	U 25*			570780	184,00		
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	U 32			570785	215,00		
CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	1.430,00	DW Verbundrohr multitubo systems		U 16*		570765	184,00	
CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	1.430,00			U 18*		570770	184,00	
						U 20*		570775	184,00	
						U 25*		570780	184,00	
						U 32		570785	215,00	
					U 40		570790	262,00		
					U 50		570795	314,00		
					U 63 (PR-3B)	Z4	572837 R	780,00		
					U 63 (PZ-S)		572365	680,00		
					U 75 (PR-3B)	Z4	572828 R	680,00		
Conex Bänninger >B- Press Gas	V 12		570107	163,00	EBRILLE Isomonflex	U 16*		570765	184,00	
	V 14		570112	163,00		U 20*		570775	184,00	
	V 15		570115	163,00		U 25*		570780	184,00	
	V 16		570117	163,00		H 26*		570370	177,00	
	V 18		570125	163,00		TH 26*		570475	196,00	
	V 22		570135	163,00		TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	V 28		570145	163,00		U 32		570785	215,00	
	V 35		570155	163,00		EBRILLE Monflex	U 16*		570765	184,00
	V 42		570165	379,00			U 20*		570775	184,00
	V 42 (PR-2B)	Z2	572850 R	339,00			U 25*		570780	184,00
	V 54		570175	390,00	H 26*			570370	177,00	
	V 54 (PR-2B)	Z2	572851 R	367,00	TH 26*			570475	196,00	
	V 15 S (PR-2B)	Z8	574752 R	131,00	TH 26 S (PR-2B)**		Z8	574794 R	131,00	
	V 18 S (PR-2B)	Z8	574756 R	131,00	U 32			570785	215,00	
	V 22 S (PR-2B)	Z8	574758 R	131,00						
	V 28 S (PR-2B)	Z8	574760 R	131,00						
	V 35 S (PR-2B)	Z8	574762 R	144,00						
	Conex Bänninger >B- Press Inox	V 15		570115	163,00					
		V 18		570125	163,00					
		V 22		570135	163,00					
		V 28		570145	163,00					
		V 35		570155	163,00					
		V 42		570165	379,00					
V 42 (PR-2B)		Z2	572850 R	339,00						
V 54			570175	390,00						
V 54 (PR-2B)		Z2	572851 R	367,00						
V 15 S (PR-2B)		Z8	574752 R	131,00						
V 18 S (PR-2B)		Z8	574756 R	131,00						
V 22 S (PR-2B)		Z8	574758 R	131,00						
V 28 S (PR-2B)		Z8	574760 R	131,00						
V 35 S (PR-2B)	Z8	574762 R	144,00							

D

E

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	M 15		570110	163,00
EFFEBI-PRESS	M 18		570120	163,00
Aisi316	M 22		570130	163,00
System M Profile ¹⁾	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S) ⁵⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
EFFEBI	V 12		570107	163,00
EFFEBI-PRESS	V 15		570115	163,00
Aisi316	V 18		570125	163,00
System V Profile	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
EFFEBI	M 12		570100	163,00
EFFEBI-PRESS	M 15		570110	163,00
Carbon-S	M 18		570120	163,00
System M Profile ¹⁾	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 12 S (PR-2B)	Z8	574736 R	131,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
EFFEBI	V 12		570107	163,00
EFFEBI-PRESS	V 15		570115	163,00
Carbon-S	V 18		570125	163,00
System V Profile	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
EFFEBI	V 12		570107	163,00
EFFEBI-PRESS	V 14		570112	163,00
COPPER	V 15		570115	163,00
	V 16		570117	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 14 S (PR-2B)	Z8	574800 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 16 S (PR-2B)	Z8	574802 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
EFFEBI	V 12		570107	163,00
EFFEBI-PRESS	V 15		570115	163,00
UNICO	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	V 12		570107	163,00
EFFEBI-PRESS	V 15		570115	163,00
UNICO (GAS)	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
EFFEBI	M 15		570110	163,00
PRESSTIGE	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
	V 15		570115	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
EFFEBI	M 15		570110	163,00
PRESSTIGE 4E05	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
EFFEBI	M 15		570110	163,00
PRESSTIGE-GAS	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
EFFEBI	M 15		570110	163,00
PRESSTIGE-GAS	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
	V 15		570115	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
EFFEBI	TH 16*		570460	196,00
TOF-GAS	TH 20*		570470	196,00
MULTIPINZA	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	H 40 (PZ-4G)		570390	600,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 32		570785	215,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	TH 16*		570460	196,00
	TH 18*		570465	196,00
TOF	TH 20*		570470	196,00
	TH 25*		570495	196,00
MULTIPINZA	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	F 16*		570717	187,00
	F 18*		570720	187,00
	F 20*		570727	187,00
	F 26*		570730	202,00
	F 32		570735	202,00
	Fz 40		570742	216,00
	Fz 50		570747	327,00
	F 63 (PZ-S)		572385	680,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 24 S (PR-2B)**	Z8	574732 R	131,00
	F 32 S (PR-2B)	Z8	574734 R	144,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	H 40 (PZ-4G)		570390	600,00
	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 26 ¹²⁾		570750	215,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
	U 63 (PR-3B)	Z4	572837 R	780,00
	U 63 (PZ-S)		572365	680,00
	B 16*		570850	214,00
	B 18*		570855	214,00
	B 20*		570860	214,00
	B 26		570870	236,00
	B 32		570880	236,00
EFIELD MULTILAYER PRESS	U 16*		570765	184,00
	U 18*		570770	184,00
DINGAS	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
EFIELD MULTILAYER PRESS	U 16*		570765	184,00
	U 18*		570770	184,00
WATER	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
Elkhart	VUS ½" (OD 15,9 mm)		571770	197,00
APOLLOXPRESS	VUS ¾" (OD 22,2 mm)		571775	197,00
Fittings Copper	VUS 1" (OD 28,6 mm)		571780	197,00
and Low-Lead	VUS 1¼" (OD 34,9 mm)		571785	197,00
Brass	VUS 1½" (OD 41,3 mm)		571790	379,00
	VUS 2" (OD 54,0 mm)		571795	390,00
Elkhart	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	640,00
APOLLOXPRESS	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	640,00
LD-C Fittings	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
Copper				

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
EMMETI	B 16*		570850	214,00
	B 20*		570860	214,00
GERPEX- FIVPRESS	B 26		570870	236,00
	B 32		570880	236,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	U 16*		570765	184,00
	U 20*		570775	184,00
EMPUR	TH 14*		570455	196,00
	TH 15*		570457	196,00
	TH 16*		570460	196,00
	TH 17*		570462	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 14 S (PR-2B)**	Z8	574778 R	131,00
	TH 15 S (PR-2B)**	Z8	574780 R	131,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 17 S (PR-2B)**	Z8	574784 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
Esta Rohr simplesta SH M	M 15		570110	163,00
	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PZ-4G)		570160	530,00
	M 54 (PZ-4G)		570170	530,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
Esta Rohr simplesta ST M	M 15		570110	163,00
	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PZ-4G)		570160	530,00
	M 54 (PZ-4G)		570170	530,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
EUROTUBI	M 12		570100	163,00
	M 15		570110	163,00
EUROPA	M 18		570120	163,00
C-Steel Pressfitting	M 22		570130	163,00
System M-Profile ¹⁾	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 12 S (PR-2B)	Z8	574736 R	131,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EUROTUBI	M 15		570110	163,00
EUROPA	M 18		570120	163,00
Inox Pressfitting	M 22		570130	163,00
System M-Profile ¹⁾	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
Evans	VAU 15 (½") (OD 12,7 mm)		572687	168,00
Components	VAU 20 (¾") (OD 19,1 mm)		572689	168,00
Presslok	VAU 25 (1") (OD 25,4 mm)		572691	168,00
	ECI 1½"		571932	211,00
	ECI 2" (PZ-4G)		571934	530,00
	ECI 2½" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104 R	1.110,00
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105 R	1.220,00
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106 R	1.430,00
F				
FAR Rubinetterie	TH 14*		570455	196,00
PRESSFAR	TH 16*		570460	196,00
	TH 17*		570462	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 14 S (PR-2B)**	Z8	574778 R	131,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 17 S (PR-2B)**	Z8	574784 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	H 14*		570310	177,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	H 40 (PZ-4G)		570390	600,00
	U 14*		570760	184,00
	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
	U 63 (PR-3B)	Z4	572837 R	780,00
	U 63 (PZ-S)		572365	680,00
F.B.Q. BARONIO	V 12		570107	163,00
BQ PRESS SOLAR	V 14		570112	163,00
	V 15		570115	163,00
	V 16		570117	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 14 S (PR-2B)	Z8	574800 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	VG 16 S (PR-2B)	Z8	574754 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
F.B.Q. BARONIO	V 12		570107	163,00
BQ PRESS WATER	V 14		570112	163,00
	V 15		570115	163,00
	V 16		570117	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 14 S (PR-2B)	Z8	574800 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	VG 16 S (PR-2B)	Z8	574754 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
F.B.Q. BARONIO	V 12		570107	163,00
BQ PRESS GAS	V 14		570112	163,00
	V 15		570115	163,00
	V 16		570117	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 14 S (PR-2B)	Z8	574800 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	VG 16 S (PR-2B)	Z8	574754 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
FERCOFLOOR	RfZ 16*		571325	204,00
DUO Press	RfZ 20*		571330	204,00
FERCO PEX	RfZ 25		571335	204,00
	RfZ 32		571340	204,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
FERCOFLOOR	RfZ 16*		571325	204,00
DUO Press	RfZ 20*		571330	204,00
MULTIFER	RfZ 25		571335	204,00
	RfZ 32		571340	204,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
	U 63 (PZ-S)		572365	680,00
FERRO systems	TH 16*		570460	196,00
BRASELI	TH 20*		570470	196,00
GPF GAS	TH 25*		570495	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
FERRO systems	U 16*		570765	184,00
BRASELI	U 18*		570770	184,00
GPF MULT	U 20*		570775	184,00
Pressfitting	U 25*		570780	184,00
MULTICAPA	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
FERRO systems	U 16*		570765	184,00
BRASELI	U 18*		570770	184,00
GPF PPSU	U 20*		570775	184,00
Pressfitting	U 25*		570780	184,00
PEX y MULTICAPA	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
FERRO systems	RfZ 16*		571325	204,00
BRASELI	RfZ 20*		571330	204,00
GPF PRESS	RfZ 25		571335	204,00
Pressfitting PEX	RfZ 32		571340	204,00
FILINOX	FTB 15		571432	236,00
Filpress	FTB 18		571434	236,00
	FTB 22		571436	236,00
	FTB 28		571438	236,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€		
FILINOX Instalpress Steel	M 15		570110	163,00	FORZA WATER CRIMP (AUS)	K16/P18*		572600	204,00		
	M 18		570120	163,00		K/20*		572605	204,00		
	M 22		570130	163,00		K/25*		572610	204,00		
	M 28		570140	163,00		K32		572615	204,00		
	M 35		570150	163,00		K1/40		572620	204,00		
	M 42 (PR-3S)	Z2	572706 R	710,00		K1/50		572625	335,00		
	M 54 (PR-3S)	Z2	572708 R	710,00		FORZA STAINLESS WATER CRIMP	K16/P18*		572600	204,00	
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.220,00			K/20*		572605	204,00	
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.430,00			U 16*		570765	184,00	
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.430,00			U 20*		570775	184,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00			U 25*		570780	184,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00			CRIMP		570785	215,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00			(AUS)		570790	262,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00			U 50		570795	314,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00			U 63 (PZ-S)		572365	680,00	
FILINOX Instalpress Inox	M 15		570110	163,00	FORZA GAS CRIMP (AUS)		K16/P18*		572600	204,00	
	M 18		570120	163,00			K/20*		572605	204,00	
	M 22		570130	163,00			K/25*		572610	204,00	
	M 28		570140	163,00			K32		572615	204,00	
	M 35		570150	163,00			K1/40		572620	204,00	
	M 42 (PR-3S)	Z2	572706 R	710,00			K1/50		572625	335,00	
	M 54 (PR-3S)	Z2	572708 R	710,00		FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)		572687	168,00	
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.220,00			VAU 20 (OD 19,1 mm)		572689	168,00	
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.430,00			VAU 25 (OD 25,4 mm)		572691	168,00	
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.430,00			VAU 32 (OD 31,8 mm)		572693	177,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00			VAU 40 (OD 38,1 mm)		572695	262,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00			VAU 50 (OD 50,8 mm)		572697	464,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00			VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	640,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00			VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	640,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00			VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	680,00	
FITTINGS ESTÁNDAR ECO-PRESS	RFz 16*		571325	204,00	FORZA STAINLESS V PRESS (AUS)		V 15		570115	163,00	
	RFz 20*		571330	204,00			V 22		570135	163,00	
	RFz 25		571335	204,00			V 28		570145	163,00	
	RFz 32		571340	204,00			V 35		570155	163,00	
	FITTINGS ESTÁNDAR MULTICAPA	RFz 16*		571325			204,00	V 42		570165	379,00
		RFz 18*		571327			204,00	V 54		570175	390,00
RFz 20*			571330	204,00	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.220,00			
RFz 25			571335	204,00	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.430,00			
RFz 32			571340	204,00	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.430,00			
FITTINGS ESTÁNDAR PE-X		RFz 16*		571325	204,00	V 15 S (PR-2B)	Z8	574752 R	131,00		
	RFz 20*		571330	204,00	V 22 S (PR-2B)	Z8	574758 R	131,00			
	RFz 25		571335	204,00	V 28 S (PR-2B)	Z8	574760 R	131,00			
	RFz 32		571340	204,00	V 35 S (PR-2B)	Z8	574762 R	144,00			
	FORNARA ForPress	B 16*		570850	214,00	FRABO	M 15		570110	163,00	
		B 20*		570860	214,00		FRABOPRESS	M 18		570120	163,00
B 26			570870	236,00	316 GAS M		M 22		570130	163,00	
B 32			570880	236,00	M 28			570140	163,00		
F 16*			570717	187,00	M 35			570150	163,00		
F 20*			570727	187,00	M 42 (PR-3S)		Z2	572706 R	710,00		
F 26*			570730	202,00	M 54 (PR-3S)		Z2	572708 R	710,00		
F 32			570735	202,00	M 15 S (PR-2B)		Z8	574738 R	131,00		
F 16 S (PR-2B)**		Z8	574728 R	131,00	M 18 S (PR-2B)		Z1	574740 R	131,00		
F 20 S (PR-2B)**		Z8	574730 R	131,00	M 22 S (PR-2B)		Z8	574742 R	131,00		
F 26 S (PR-2B)**		Z8	574732 R	131,00	M 28 S (PR-2B)		Z8	574744 R	131,00		
F 32 S (PR-2B)		Z8	574734 R	144,00	M 35 S (PR-2B)		Z8	574746 R	144,00		
H 16*			570320	177,00	FRABO FRABOPRESS 316 GAS V		V 15		570115	163,00	
H 20*			570350	177,00			V 18		570125	163,00	
H 26*			570370	177,00			V 22		570135	163,00	
H 32			570380	177,00		V 28		570145	163,00		
TH 16*			570460	196,00		V 35		570155	163,00		
TH 20*			570470	196,00		V 42		570165	379,00		
TH 26*			570475	196,00		V 42 (PR-2B)	Z2	572850 R	339,00		
TH 32			570480	196,00		V 54		570175	390,00		
TH 16 S (PR-2B)**		Z8	574782 R	131,00		V 54 (PR-2B)	Z2	572851 R	367,00		
TH 20 S (PR-2B)**		Z8	574788 R	131,00		V 15 S (PR-2B)	Z8	574752 R	131,00		
TH 26 S (PR-2B)**		Z8	574794 R	131,00		V 18 S (PR-2B)	Z8	574756 R	131,00		
TH 32 S (PR-2B)		Z8	574798 R	144,00		V 22 S (PR-2B)	Z8	574758 R	131,00		
U 16*			570765	184,00		V 28 S (PR-2B)	Z8	574760 R	131,00		
U 20*			570775	184,00		V 35 S (PR-2B)	Z8	574762 R	144,00		
U 26* ⁽¹²⁾			570750	215,00							
U 32			570785	215,00							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
FRABO	M 15		570110	163,00
FRABOPRESS	M 18		570120	163,00
316 M	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 66,7 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579107 R	1.220,00
	M 76,1 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
FRABO	V 15		570115	163,00
FRABOPRESS	V 18		570125	163,00
316 V	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
FRABO	V 12		570107	163,00
FRABOPRESS	V 15		570115	163,00
CHROME	V 18		570125	163,00
	V 22		570135	163,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
FRABO	M 15		570110	163,00
FRABOPRESS	M 18		570120	163,00
C-STEEL M	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 66,7 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579107 R	1.220,00
	M 76,1 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
FRABO	V 12		570107	163,00
FRABOPRESS	V 15		570115	163,00
C-STEEL V	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
FRABO	M 12		570100	163,00
FRABOPRESS	M 15		570110	163,00
GAS M	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 12 S (PR-2B)	Z8	574736 R	131,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
FRABO	V 12		570107	163,00
FRABOPRESS	V 15		570115	163,00
GAS V	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
FRABO	V 12		570107	163,00
FRABOPRESS	V 15		570115	163,00
KOMBI	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	M 66,7 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579107 R	1.220,00
	M 76,1 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579111 R	1.430,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
FRABO	M 12		570100	163,00
FRABOPRESS M	M 15		570110	163,00
	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 66,7 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579107 R	1.220,00
	M 76,1 XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³¹ / Z7 XL 45 kN ⁴¹	579111 R	1.430,00
	M 12 S (PR-2B)	Z8	574736 R	131,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
FRABO	V 15		570115	163,00
FRABOPRESS	V 18		570125	163,00
SOLAR	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
FRABO	V 12		570107	163,00
FRABOPRESS V	V 15		570115	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 42 (PR-2B)	Z2	572850 R	339,00
	V 54		570175	390,00
	V 54 (PR-2B)	Z2	572851 R	367,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
Fränkische	F 16*		570717	187,00
alpex-duo XS	F 20*		570727	187,00
	F 26*		570730	202,00
	F 32		570735	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00
	F 32 S (PR-2B)**	Z8	574734 R	144,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)**	Z8	574798 R	144,00
Fränkische	F 16*		570717	187,00
alpex F50 PROF1	F 20*		570727	187,00
	F 26*		570730	202,00
	F 32		570735	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00
	F 32 S (PR-2B)**	Z8	574734 R	144,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)**	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
(DN 26)	U 25*		570780	184,00
	U 32		570785	215,00
	VP 16*		570910	196,00
	VP 20*		570915	196,00
	VP 32		570925	216,00

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
Fränkische alpeX L	Fz 40		570742	216,00	Geberit Mapress Edelstahl	M 12		570100	163,00	
	Fz 50		570747	327,00		M 15		570110	163,00	
	F 63 (PZ-S)		572385	680,00		M 18		570120	163,00	
	Fz 75 (PR-3B)	Z4	572830 R	640,00		M 22		570130	163,00	
G						M 28		570140	163,00	
gaboTherm H+S	TH 10*		570467	196,00		M 35		570150	163,00	
	TH 12*		570452	196,00		M 35 (PR-3S)	Z2	572727 R	710,00	
	TH 14*		570455	196,00		M 42 (PZ-4G)		570160	530,00	
	TH 15*		570457	196,00		M 54 (PZ-4G)		570170	530,00	
	TH 16*		570460	196,00		M 42 (PR-3S)	Z2	572706 R	710,00	
	TH 17*		570462	196,00		M 54 (PR-3S)	Z2	572708 R	710,00	
	TH 18*		570465	196,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	
	TH 20*		570470	196,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	TH 25*		570495	196,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	TH 26*		570475	196,00		M 12 S (PR-2B)	Z8	574736 R	131,00	
	TH 32		570480	196,00		M 15 S (PR-2B)	Z8	574738 R	131,00	
	TH 40		570485	260,00		M 18 S (PR-2B)	Z8	574740 R	131,00	
	TH 50 (PZ-S)		572400	680,00		M 22 S (PR-2B)	Z8	574742 R	131,00	
	TH 63 (PZ-S)		572405	680,00		M 28 S (PR-2B)	Z8	574744 R	131,00	
	TH 10 S (PR-2B)**	Z8	574772 R	131,00		M 35 S (PR-2B)	Z8	574746 R	144,00	
	TH 12 S (PR-2B)**	Z8	574776 R	131,00		Geberit Mapress Edelstahl Gas	M 15		570110	163,00
	TH 14 S (PR-2B)**	Z8	574778 R	131,00		M 18		570120	163,00	
	TH 15 S (PR-2B)**	Z8	574780 R	131,00	M 22		570130	163,00		
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	M 28		570140	163,00		
	TH 17 S (PR-2B)**	Z8	574784 R	131,00	M 35		570150	163,00		
	TH 18 S (PR-2B)**	Z8	574786 R	131,00	M 35 (PR-3S)	Z2	572727 R	710,00		
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	M 42 (PR-3S)	Z2	572706 R	710,00		
	TH 25 S (PR-2B)**	Z8	574792 R	131,00	M 54 (PR-3S)	Z2	572708 R	710,00		
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579107 R	1.220,00		
	TH 32 S (PR-2B)	Z8	574798 R	144,00	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		
					M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		
					M 15 S (PR-2B)	Z8	574736 R	131,00		
					M 18 S (PR-2B)	Z8	574740 R	131,00		
					M 22 S (PR-2B)	Z8	574742 R	131,00		
					M 28 S (PR-2B)	Z8	574744 R	131,00		
					M 35 S (PR-2B)	Z8	574746 R	144,00		
	Gallagher USA YogaPipe ACR	H 12* (¾")		570300	177,00	Geberit Mapress Edelstahl Sprinkler	M 22		570130	163,00
		U 14* (¾")		570760	184,00	M 28		570140	163,00	
	U 16* (½")		570765	184,00	M 35 (PR-3S)	Z2	572727 R	710,00		
	U 18* (½")		570770	184,00	M 42 (PR-3S)	Z2	572706 R	710,00		
	U 20* (¾")		570775	184,00	M 54 (PR-3S)	Z2	572708 R	710,00		
	U 25* (¾")		570780	184,00	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00		
	U 32 (1½")		570785	215,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00		
				M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00			
				M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00			
Geberit Mapress C-STAHl	M 12		570100	163,00	Geberit Mapress Kupfer	M 12		570100	163,00	
	M 15		570110	163,00	M 15		570110	163,00		
	M 18		570120	163,00	M 18		570120	163,00		
	M 22		570130	163,00	M 22		570130	163,00		
	M 28		570140	163,00	M 28		570140	163,00		
	M 35		570150	163,00	M 35		570150	163,00		
	M 35 (PR-3S)	Z2	572727 R	710,00	M 35 (PR-3S)	Z2	572727 R	710,00		
	M 42 (PZ-4G)		570160	530,00	M 42 (PZ-4G)		570160	530,00		
	M 54 (PZ-4G)		570170	530,00	M 54 (PZ-4G)		570170	530,00		
	M 42 (PR-3S)	Z2	572706 R	710,00	M 42 (PR-3S)	Z2	572706 R	710,00		
	M 54 (PR-3S)	Z2	572708 R	710,00	M 54 (PR-3S)	Z2	572708 R	710,00		
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00		
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		
	M 12 S (PR-2B)	Z8	574736 R	131,00	M 12 S (PR-2B)	Z8	574736 R	131,00		
	M 15 S (PR-2B)	Z8	574738 R	131,00	M 15 S (PR-2B)	Z8	574738 R	131,00		
	M 18 S (PR-2B)	Z8	574740 R	131,00	M 18 S (PR-2B)	Z8	574740 R	131,00		
	M 22 S (PR-2B)	Z8	574742 R	131,00	M 22 S (PR-2B)	Z8	574742 R	131,00		
	M 28 S (PR-2B)	Z8	574744 R	131,00	M 28 S (PR-2B)	Z8	574744 R	131,00		
	M 35 S (PR-2B)	Z8	574746 R	144,00	M 35 S (PR-2B)	Z8	574746 R	144,00		
Geberit Mapress C-STAHl	M 22		570130	163,00	Geberit Mapress Kupfer Gas	M 15		570110	163,00	
	M 28		570140	163,00	M 18		570120	163,00		
Sprinkler nass	M 35 (PR-3S)	Z2	572727 R	710,00	M 22		570130	163,00		
	M 42 (PR-3S)	Z2	572706 R	710,00	M 28		570140	163,00		
	M 54 (PR-3S)	Z2	572708 R	710,00	M 35		570150	163,00		
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	M 35 (PR-3S)	Z2	572727 R	710,00		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	M 42 (PR-3S)	Z2	572706 R	710,00		
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	M 54 (PR-3S)	Z2	572708 R	710,00		
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	M 15 S (PR-2B)	Z8	574736 R	131,00		
					M 18 S (PR-2B)	Z8	574740 R	131,00		
					M 22 S (PR-2B)	Z8	574742 R	131,00		
					M 28 S (PR-2B)	Z8	574744 R	131,00		
					M 35 S (PR-2B)	Z8	574746 R	144,00		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Geberit Mepla	G 16*		570400	197,00
	G 20*		570410	197,00
	G 26*		570420	209,00
	G 32		570430	223,00
	G 40		570440	288,00
	G 50		570450	301,00
	G 63 (PZ-S)		572470	860,00
Geberit Mepla Therm	G 16*		570400	197,00
	G 20*		570410	197,00
	G 26*		570420	209,00
Geberit Volex	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
General Fittings 5T00	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 63 (PZ-S)		572365	680,00
U 63 (PR-3B)	Z4	572837 R	780,00	
General Fittings Ewoprex	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 63 (PZ-S)		572365	680,00
U 63 (PR-3B)	Z4	572837 R	780,00	
General Fittings Serie 5S00	B 16*		570850	214,00
	B 18*		570855	214,00
	B 20*		570860	214,00
	B 26		570870	236,00
	B 32		570880	236,00
	F 16*		570717	187,00
	F 20*		570727	187,00
	F 26*		570730	202,00
	F 32		570735	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00
	F 32 S (PR-2B)	Z8	574734 R	144,00
	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	H 40 (PZ-4G)		570390	600,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
TH 26 S (PR-2B)**	Z8	574794 R	131,00	
TH 32 S (PR-2B)	Z8	574798 R	144,00	
U 16*		570765	184,00	
U 18*		570770	184,00	
U 20*		570775	184,00	
U 25*		570780	184,00	
U 32		570785	215,00	
U 40		570790	262,00	
U 63 (PZ-S)		572365	680,00	
U 63 (PR-3B)	Z4	572837 R	780,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
General Fittings Trident	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	U 16*		570765	184,00
U 20*		570775	184,00	
U 32		570785	215,00	
General Fittings Trident Gas	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	H 16*		570320	177,00
	H 20*		570350	177,00
Giacomini Raccordi RM Giacomini	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
TH 63 (PZ-S)		572405	680,00	
U 16*		570765	184,00	
U 20*		570775	184,00	
U 32		570785	215,00	
U 40		570790	262,00	
U 50		570795	314,00	
Giacomini RM MULTIGAS	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	U 16*		570765	184,00
	U 20*		570775	184,00
U 32		570785	215,00	
Giacomini Valvole Giacomini serie R850V	V 15		570115	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 54		570175	390,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
	SA 15		570935	196,00
	SA 18		570940	196,00
	SA 22		570945	196,00
	SA 28		570950	196,00
	SA 35		570955	196,00
M 15		570110	163,00	
M 18		570120	163,00	
M 22		570130	163,00	
M 28		570140	163,00	
M 35		570150	163,00	
M 15 S (PR-2B)	Z8	574738 R	131,00	
M 18 S (PR-2B)	Z8	574740 R	131,00	
M 22 S (PR-2B)	Z8	574742 R	131,00	
M 28 S (PR-2B)	Z8	574744 R	131,00	
M 35 S (PR-2B)	Z8	574746 R	144,00	
Golan Pipe Systems (Scandinavia) Alu-Pres	U 16*		570765	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
	U 40		570790	262,00
U 50		570795	314,00	
U 63 (PZ-S)		572365	680,00	
U 63 (PR-3B)	Z4	572837 R	780,00	
U 75 (PR-3B)	Z4	572828 R	680,00	
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770	197,00
	VUS ¾" (OD 22,2 mm)		571775	197,00
	VUS 1" (OD 28,6 mm)		571780	197,00
	VUS 1¼" (OD 34,9 mm)		571785	197,00
	VUS 1½" (OD 41,3 mm)		571790	379,00
	VUS 2" (OD 54,0 mm)		571795	390,00
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	640,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	640,00
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
GS Wärmesysteme System TH	TH 14*		570455	196,00	Herotec tempusPRESS PLUS	H 16*		570320	177,00
	TH 16*		570460	196,00		H 20*		570350	177,00
	TH 20*		570470	196,00		H 25*		570360	177,00
	TH 26*		570475	196,00		H 32		570380	177,00
	TH 32		570480	196,00		H 40 (PZ-4G)		570390	600,00
	TH 40		570485	260,00		RFz 16*		571325	204,00
	TH 50 (PZ-S)		572400	680,00		RFz 20*		571330	204,00
	TH 63 (PZ-S)		572405	680,00		RFz 25		571335	204,00
	TH 14 S (PR-2B)**	Z8	574778 R	131,00		RFz 32		571340	204,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		TH 16*		570460	196,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		TH 20*		570470	196,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00		TH 25*		570495	196,00
	TH 32 S (PR-2B)**	Z8	574798 R	144,00		TH 32		570480	196,00
	GS Wärmesysteme System V	V 15		570115		163,00	TH 40		570485
V 18		570125	163,00	TH 50 (PZ-S)		572400	680,00		
V 22		570135	163,00	TH 63 (PZ-S)		572405	680,00		
V 28		570145	163,00	TH 16 S (PR-2B)**	Z8	574782 R	131,00		
V 35		570155	163,00	TH 20 S (PR-2B)**	Z8	574788 R	131,00		
V 15 S (PR-2B)	Z8	574752 R	131,00	TH 25 S (PR-2B)**	Z8	574792 R	131,00		
V 18 S (PR-2B)	Z8	574756 R	131,00	TH 32 S (PR-2B)	Z8	574798 R	144,00		
V 22 S (PR-2B)	Z8	574758 R	131,00	U 16*		570765	184,00		
V 28 S (PR-2B)	Z8	574760 R	131,00	U 20*		570775	184,00		
V 35 S (PR-2B)	Z8	574762 R	144,00	U 25*		570780	184,00		
H					U 32		570785	215,00	
HASTINIK Hastinik/Hitpress	M 15		570110	163,00	U 40		570790	262,00	
	M 18		570120	163,00	U 50		570795	314,00	
	M 22		570130	163,00	U 63 (PZ-S)		572365	680,00	
	M 28		570140	163,00	U 63 (PR-3B)	Z4	572837 R	780,00	
	M 35		570150	163,00	U 75 (PR-3B)	Z4	572828 R	680,00	
	M 42 (PZ-4G)		570160	530,00	Herotec	H 16*	570320	177,00	
	M 54 (PZ-4G)		570170	530,00	tempusPRESS	H 20*	570350	177,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	PLUS PPSU	H 25*	570360	177,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	H 32		570380	177,00	
	M 76,1 XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.220,00	TH 16*		570460	196,00	
	M 88,9 G XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.430,00	TH 20*		570470	196,00	
	M 108,0 G XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.430,00	TH 25*		570495	196,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	TH 32		570480	196,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	TH 40		570485	260,00	
M 22 S (PR-2B)	Z8	574742 R	131,00	TH 50 (PZ-S)		572400	680,00		
M 28 S (PR-2B)	Z8	574744 R	131,00	TH 63 (PZ-S)		572405	680,00		
M 35 S (PR-2B)	Z8	574746 R	144,00	TH 16 S (PR-2B)**	Z8	574782 R	131,00		
heima24	TH 16*		570460	196,00	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 20*		570470	196,00	TH 25 S (PR-2B)**	Z8	574792 R	131,00	
	TH 26*		570475	196,00	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	TH 32		570480	196,00	U 16*		570765	184,00	
	TH 40		570485	260,00	U 20*		570775	184,00	
	TH 50 (PZ-S)		572400	680,00	U 25*		570780	184,00	
	TH 63 (PZ-S)		572405	680,00	U 32		570785	215,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	U 40		570790	262,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	U 50		570795	314,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	U 63 (PR-3B)	Z4	572837 R	780,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	U 63 (PZ-S)		572365	680,00	
	U 16*		570765	184,00	U 75 (PR-3B)	Z4	572828 R	680,00	
	U 20*		570775	184,00	HERZ PIPEFIX	TH 10*	570467	196,00	
	U 32		570785	215,00	TH 16*		570460	196,00	
HELIROMA Klimapress	U 16*		570765	184,00	TH 20*		570470	196,00	
	U 20*		570775	184,00	TH 26*		570475	196,00	
	U 25*		570780	184,00	TH 32		570480	196,00	
	U 32		570785	215,00	TH 40		570485	260,00	
	U 40		570790	262,00	TH 50 (PZ-S)		572400	680,00	
	U 50		570795	314,00	TH 63 (PZ-S)		572405	680,00	
HELIROMA Klimapress PPSU	U 63 (PR-3B)	Z4	572837 R	780,00	THz 75 (PR-3B)	Z4	572829 R	640,00	
	U 63 (PZ-S)		572365	680,00	TH 10 S (PR-2B)**	Z8	574772 R	131,00	
	U 75 (PR-3B)	Z4	572828 R	680,00	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
					TH 20 S (PR-2B)**	Z8	574788 R	131,00	
Henco	U 16*		570765	184,00	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	U 20*		570775	184,00	TH 32 S (PR-2B)**	Z8	574798 R	144,00	
	U 25*		570780	184,00	HIDRONIX	TH 16*	570460	196,00	
	U 32		570785	215,00	MULTIGAS	TH 20*	570470	196,00	
	TH 14*		570455	196,00	TH 26*		570475	196,00	
	TH 16*		570460	196,00					
	TH 18*		570465	196,00					
	TH 20*		570470	196,00					
TH 26*		570475	196,00						
HE 32		571900	235,00						
HEz 40		571904	340,00						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
HIDRONIX MULTIPIPE	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	H 14*		570310	177,00	
	H 16*		570320	177,00	
	H 18*		570340	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
	U 14*		570760	184,00	
	U 16*		570765	184,00	
	U 18*		570770	184,00	
	U 20*		570775	184,00	
	U 26* ¹²⁾		570750	215,00	
	U 32		570785	215,00	
	HIDRONIX UNICO	TH 14*		570455	196,00
		TH 16*		570460	196,00
		TH 20*		570470	196,00
		TH 26*		570475	196,00
		H 14*		570310	177,00
H 16*			570320	177,00	
H 18*			570340	177,00	
H 20*			570350	177,00	
H 26*			570370	177,00	
U 14*			570760	184,00	
U 16*			570765	184,00	
U 18*			570770	184,00	
U 20*			570775	184,00	
U 26* ¹²⁾			570750	215,00	
U 32			570785	215,00	
HITEC Sistema Multistrato		TH 14*		570455	196,00
		TH 16*		570460	196,00
		TH 18*		570465	196,00
		TH 20*		570470	196,00
		TH 26*		570475	196,00
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 14 S (PR-2B)**	Z8	574778 R	131,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 18 S (PR-2B)**	Z8	574786 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
HITHERM-ISOTUBI NUMEPRESS	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
	HITHERM HTpress	M 15		570110	163,00
		M 18		570120	163,00
M 22			570130	163,00	
M 28			570140	163,00	
M 35			570150	163,00	
M 42 (PR-3S)		Z2	572706 R	710,00	
M 54 (PR-3S)		Z2	572708 R	710,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
M 15 S (PR-2B)		Z8	574738 R	131,00	
M 18 S (PR-2B)		Z8	574740 R	131,00	
M 22 S (PR-2B)		Z8	574742 R	131,00	
M 28 S (PR-2B)		Z8	574744 R	131,00	
M 35 S (PR-2B)		Z8	574746 R	144,00	
HITHERM HTfire		M 15		570110	163,00
		M 18		570120	163,00
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
HITHERM HTair	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
	Hopewell press fit system	M 15		570110	163,00
		M 18		570120	163,00
M 22			570130	163,00	
M 28			570140	163,00	
M 35			570150	163,00	
M 42 (PZ-4G)			570160	530,00	
M 54 (PZ-4G)			570170	530,00	
M 42 (PR-3S)		Z2	572706 R	710,00	
M 54 (PR-3S)		Z2	572708 R	710,00	
hp praski BAVARIA-press		TH 10*		570467	196,00
	TH 12*		570452	196,00	
	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 17*		570462	196,00	
	TH 20*		570470	196,00	
	TH 25*		570495	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 10 S (PR-2B)**	Z8	574772 R	131,00	
	TH 12 S (PR-2B)**	Z8	574776 R	131,00	
	TH 14 S (PR-2B)**	Z8	574778 R	131,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 17 S (PR-2B)**	Z8	574784 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 25 S (PR-2B)**	Z8	574792 R	131,00	
TH 26 S (PR-2B)**	Z8	574794 R	131,00		
TH 32 S (PR-2B)	Z8	574798 R	144,00		
ICMA Sempiter	H 16*		570320	177,00	
	H 20*		570350	177,00	
	H 25*		570360	177,00	
	H 26*		570370	177,00	
	H 32		570380	177,00	
	H 40 (PZ-4G)		570390	600,00	
	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 25*		570495	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 63 (PZ-S)		572405	680,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
TH 32 S (PR-2B)	Z8	574798 R	144,00		
U 16*		570765	184,00		
U 20*		570775	184,00		
U 25*		570780	184,00		
U 26* ¹²⁾		570750	215,00		
U 32		570785	215,00		
U 40		570790	262,00		
U 50		570795	314,00		
U 63 (PR-3B)	Z4	572837 R	780,00		
U 63 (PZ-S)		572365	680,00		
ICMA Sempigas	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 25*		570495	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	Idrosanitaria Bonomi	TH 16*		570460	196,00
TH 20*			570470	196,00	
TH 26*			570475	196,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
Homegas	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 16*		570460	196,00	
	TH 18*		570465	196,00	
Idrosanitaria Bonomi Idropress	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 63 (PZ-S)		572405	680,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
IDROSISTEMI Ta-Press	TH 16*		570460	196,00	IDROTRADE StormSTEEL ¹⁾	M 12		570100	163,00
	TH 20*		570470	196,00		M 15		570110	163,00
	TH 26*		570475	196,00		M 18		570120	163,00
	TH 32		570480	196,00		M 22		570130	163,00
	TH 40		570485	260,00		M 28		570140	163,00
	TH 50 (PZ-S)		572400	680,00		M 35		570150	163,00
	TH 63 (PZ-S)		572405	680,00		M 42 (PR-3S)	Z2	572706 R	710,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		M 54 (PR-3S)	Z2	572708 R	710,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00		M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00		M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	F 16*		570717	187,00		M 12 S (PR-2B)	Z8	574736 R	131,00
	F 20*		570727	187,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	F 26*		570730	202,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	F 32		570735	202,00		M 22 S (PR-2B)	Z8	574742 R	131,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00		M 28 S (PR-2B)	Z8	574744 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00		M 35 S (PR-2B)	Z8	574746 R	144,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00		ILTA	M 15	570110	163,00
	F 32 S (PR-2B)	Z8	574734 R	144,00		INOX/CHIBRO	M 18	570120	163,00
	Fz 40		570742	216,00		Pressfitting Cuni	M 22	570130	163,00
	Fz 50		570747	327,00		M 28	M 28	570140	163,00
	F 63 (PZ-S)		572385	680,00		M 35	M 35	570150	163,00
	H 16*		570320	177,00		M 42 (PR-3S)	Z2	572706 R	710,00
	H 20*		570350	177,00		M 54 (PR-3S)	Z2	572708 R	710,00
	H 26*		570370	177,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	H 32		570380	177,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	H 40 (PZ-46)		570390	600,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	U 16*		570765	184,00	M 15 S (PR-2B)	Z8	574738 R	131,00	
	U 20*		570775	184,00	M 18 S (PR-2B)	Z8	574740 R	131,00	
	U 26* ¹²⁾		570750	215,00	M 22 S (PR-2B)	Z8	574742 R	131,00	
	U 32		570785	215,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
	U 40		570790	262,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
	U 50		570795	314,00	ILTA	M 15	570110	163,00	
	U 63 (PZ-S)		572365	680,00	INOX/CHIBRO	M 18	570120	163,00	
	B 16*		570850	214,00	Pressfitting inox	M 22	570130	163,00	
	B 20*		570860	214,00	M 28	M 28	570140	163,00	
	B 26		570870	236,00	M 35	M 35	570150	163,00	
	B 32		570880	236,00	M 42 (PR-3S)	Z2	572706 R	710,00	
	IDROTRADE Storm Multipinza	H 16*		570320	177,00	M 54 (PR-3S)	Z2	572708 R	710,00
		H 20*		570350	177,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
		H 26*		570370	177,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
		H 32		570380	177,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
TH 16*			570460	196,00	M 15 S (PR-2B)	Z8	574738 R	131,00	
TH 20*			570470	196,00	M 18 S (PR-2B)	Z8	574740 R	131,00	
TH 26*			570475	196,00	M 22 S (PR-2B)	Z8	574742 R	131,00	
TH 32			570480	196,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
THL 32			570487	196,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
TH 40			570485	260,00	Instantor	TH 16*	570460	196,00	
TH 50 (PZ-S)			572400	680,00	Press System	TH 20*	570470	196,00	
TH 63 (PZ-S)			572405	680,00	TH 26*	570475	196,00		
TH 16 S (PR-2B)**		Z8	574782 R	131,00	TH 32	570480	196,00		
TH 20 S (PR-2B)**		Z8	574788 R	131,00	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
TH 26 S (PR-2B)**		Z8	574794 R	131,00	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
TH 32 S (PR-2B)		Z8	574798 R	144,00	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
U 16*			570765	184,00	TH 32 S (PR-2B)	Z8	574798 R	144,00	
U 20*			570775	184,00	Instantor	VI ½" S (PR-2B)	Z8	574850 R	131,00
IDROTRADE StormPRES ¹⁾	M 15		570110	163,00	Copper Press Imperial	VI ¾" S (PR-2B)	Z8	574852 R	131,00
	M 18		570120	163,00	VI 1" S (PR-2B)	Z8	574854 R	131,00	
	M 22		570130	163,00	Instantor	M 15	570110	163,00	
	M 28		570140	163,00	Copper Press Metric	M 22	570130	163,00	
	M 35		570150	163,00	M 28	M 28	570140	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00					
	M 15 S (PR-2B)	Z8	574738 R	131,00					
	M 18 S (PR-2B)	Z8	574740 R	131,00					
	M 22 S (PR-2B)	Z8	574742 R	131,00					
	M 28 S (PR-2B)	Z8	574744 R	131,00					
	M 35 S (PR-2B)	Z8	574746 R	144,00					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
IPA IPANA Press	TH 10*		570467	196,00	
	TH 11,6*		570482	196,00	
	TH 12*		570452	196,00	
	TH 14*		570455	196,00	
	TH 15*		570457	196,00	
	TH 16*		570460	196,00	
	TH 17*		570462	196,00	
	TH 18*		570465	196,00	
	TH 20*		570470	196,00	
	TH 22*		570472	196,00	
	TH 25*		570495	196,00	
	TH 26*		570475	196,00	
	TH 28		570477	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 63 (PZ-S)		572405	680,00	
	THz 75 (PR-3B)	Z4	572829 R	640,00	
	TH 10 S (PR-2B)**	Z8	574772 R	131,00	
	TH 11,6 S (PR-2B)**	Z8	574774 R	131,00	
	TH 12 S (PR-2B)**	Z8	574776 R	131,00	
	TH 14 S (PR-2B)**	Z8	574778 R	131,00	
	TH 15 S (PR-2B)**	Z8	574780 R	131,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 17 S (PR-2B)**	Z8	574784 R	131,00	
	TH 18 S (PR-2B)**	Z8	574786 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 22 S (PR-2B)**	Z8	574790 R	131,00	
	TH 25 S (PR-2B)**	Z8	574792 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 28 S (PR-2B)**	Z8	574796 R	144,00	
	TH 32 S (PR-2B)**	Z8	574798 R	144,00	
	IPA THu IPANA Press	TH 16*		570460	196,00
		TH 20*		570470	196,00
		TH 26*		570475	196,00
TH 32			570480	196,00	
TH 40			570485	260,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
TH 26 S (PR-2B)**		Z8	574794 R	131,00	
TH 32 S (PR-2B)	Z8	574798 R	144,00		
IPALPEX (Industrie du Plastique et Accessoires)	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 18*		570465	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	THL 32		570487	196,00	
	TH 40		570485	260,00	
TH 50 (PZ-S)		572400	680,00		
TH 63 (PZ-S)		572405	680,00		
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18*		572600	204,00	
	PF 22*		571980	221,00	
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K16/P18*		572600	204,00	
	K/20*		572605	204,00	
	K/25*		572610	204,00	
	K32		572615	204,00	
	K1/40		572620	204,00	
K1/50		572625	335,00		
IPLEX PIPELINES AUSTRALIA Iplex K2	K16/P18*		572600	204,00	
	K/20*		572605	204,00	
	K/25*		572610	204,00	
ISOLTUBEX ISOLPEX IPERT	Rfz 16*		571325	204,00	
	Rfz 20*		571330	204,00	
	Rfz 25		571337	225,00	
	Rfz 32		571342	225,00	
	Rfz 16*		571325	204,00	
ISOLTUBEX Multicapa	Rfz 18*		571327	204,00	
	Rfz 20*		571330	204,00	
	Rfz 25		571337	225,00	
	Rfz 32		571342	225,00	
	U 16*		570765	184,00	
	U 18*		570770	184,00	
	U 20*		570775	184,00	
	U 25*		570780	184,00	
	U 32		570785	215,00	
	U 40		570790	262,00	
	U 50		570795	314,00	
	U 63 (PR-3B)	Z4	572837 R	780,00	
	U 63 (PZ-S)		572365	680,00	
	ISOLTUBEX Multicapa GAS	Rfz 16*		571325	204,00
		Rfz 20*		571330	204,00
		Rfz 25		571337	225,00
		Rfz 32		571342	225,00
ISOLTUBEX Multicapa-PPSU	U 16*		570765	184,00	
	U 20*		570775	184,00	
	U 25*		570780	184,00	
	U 32		570785	215,00	
ISOTUBI NUMEPRESS	M 15		570110	163,00	
	M 18 ¹⁾		570120	163,00	
	M 22		570130	163,00	
	M 28 ¹⁾		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
IVAR ALPEX-GAS	B 20		570860	214,00
	B 26		570870	236,00
B 32		570880	236,00	
IVAR Ivar-Press	B 14*		570845	214,00
	B 16*		570850	214,00
	B 18*		570855	214,00
	B 20*		570860	214,00
	B 26		570870	236,00
	B 32		570880	236,00
	Fz 40		570742	216,00
	Fz 50		570747	327,00
	F 63 (PZ-S)		572385	680,00
	IVAR MULTI PRESS GAS ITALIA	TH 16*		570460
TH 20*			570470	196,00
IVAR Multi Press MP	TH 26*		570475	196,00
	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
TH 16 S (PR-2B)**	Z8	574782 R	131,00	
TH 18 S (PR-2B)**	Z8	574786 R	131,00	
TH 20 S (PR-2B)**	Z8	574788 R	131,00	
TH 25 S (PR-2B)**	Z8	574792 R	131,00	
TH 26 S (PR-2B)**	Z8	574794 R	131,00	
TH 32 S (PR-2B)	Z8	574798 R	144,00	
F 16*		570717	187,00	
F 18*		570720	187,00	
F 20*		570727	187,00	
F 26*		570730	202,00	
F 32		570735	202,00	
Fz 40		570742	216,00	
Fz 50		570747	327,00	
F 63 (PZ-S)		572385	680,00	
F 16 S (PR-2B)**	Z8	574728 R	131,00	
F 20 S (PR-2B)**	Z8	574730 R	131,00	
F 26 S (PR-2B)**	Z8	574732 R	131,00	
F 32 S (PR-2B)	Z8	574734 R	144,00	
H 16*		570320	177,00	
H 18*		570340	177,00	
H 20*		570350	177,00	
H 25*		570360	177,00	
H 26*		570370	177,00	
H 32		570380	177,00	
H 40 (PZ-46)		570390	600,00	
U 16*		570765	184,00	
U 18*		570770	184,00	
U 20*		570775	184,00	
U 25*		570780	184,00	
U 26* ¹²⁾		570750	215,00	
U 32		570785	215,00	
U 40		570790	262,00	
U 50		570795	314,00	
U 63 (PZ-S)		572365	680,00	
B 16*		570850	214,00	
B 18*		570855	214,00	
B 20*		570860	214,00	
B 26		570870	236,00	
B 32		570880	236,00	
IVAR Multi Press Leak (MPL)	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
	F 16*		570717	187,00
	F 20*		570727	187,00
	F 26*		570730	202,00
	F 32		570735	202,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00
F 32 S (PR-2B)	Z8	574734 R	144,00	
H 16*		570320	177,00	
H 20*		570350	177,00	
H 26*		570370	177,00	
H 32		570380	177,00	
U 16*		570765	184,00	
U 20*		570775	184,00	
U 26* ¹²⁾		570750	215,00	
U 32		570785	215,00	
B 16*		570850	214,00	
B 20*		570860	214,00	
B 26		570870	236,00	
B 32		570880	236,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460	196,00	IVT PRIPRESS	TH 16*		570460	196,00	
	TH 20*		570470	196,00		TH 20*		570470	196,00	
	TH 26*		570475	196,00		TH 26*		570475	196,00	
	TH 32		570480	196,00		TH 32		570480	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		TH 40		570485	260,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00		TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00		TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	F 16*		570717	187,00		TH 32 S (PR-2B)	Z8	574798 R	144,00	
	F 20*		570727	187,00		J				
	F 26*		570730	202,00		Jäger - Aquatec	H 14*		570310	177,00
	F 32		570735	202,00		Aquapress H	H 16*		570320	177,00
	F 16 S (PR-2B)**	Z8	574728 R	131,00			H 17*		570330	177,00
	F 20 S (PR-2B)**	Z8	574730 R	131,00			H 18*		570340	177,00
	F 26 S (PR-2B)**	Z8	574732 R	131,00			H 20*		570350	177,00
	F 32 S (PR-2B)	Z8	574734 R	144,00			H 26*		570370	177,00
	H 16*		570320	177,00			H 32		570380	177,00
	H 20*		570350	177,00		U 40		570790	262,00	
	H 26*		570370	177,00		U 50		570795	314,00	
	H 32		570380	177,00		U 63 (PZ-S)		572365	680,00	
	U 16*		570765	184,00	Jäger - Aquatec	M 15		570110	163,00	
	U 20*		570775	184,00	C-Stahl - Press Typ M	M 18		570120	163,00	
	U 26* ¹²⁾		570750	215,00		M 22		570130	163,00	
	U 32		570785	215,00		M 28		570140	163,00	
	B 16*		570850	214,00		M 35		570150	163,00	
	B 20*		570860	214,00		M 42 (PR-3S)	Z2	572706 R	710,00	
	B 26		570870	236,00		M 54 (PR-3S)	Z2	572708 R	710,00	
	B 32		570880	236,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	IVAR	TH 16*		570460	196,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	Plastic Multi Press PMP	TH 20*		570470	196,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
		TH 25*		570495	196,00		M 15 S (PR-2B)	Z8	574738 R	131,00
		TH 26*		570475	196,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	TH 32		570480	196,00		M 22 S (PR-2B)	Z8	574742 R	131,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		M 28 S (PR-2B)	Z8	574744 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		M 35 S (PR-2B)	Z8	574746 R	144,00	
	TH 25 S (PR-2B)**	Z8	574792 R	131,00	Jäger - Aquatec	M 15		570110	163,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	Edelstahl - Press Typ M	M 18		570120	163,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00		M 22		570130	163,00	
	F 16*		570717	187,00		M 28		570140	163,00	
	F 20*		570727	187,00		M 35		570150	163,00	
	F 26*		570730	202,00		M 42 (PR-3S)	Z2	572706 R	710,00	
	F 32		570735	202,00		M 54 (PR-3S)	Z2	572708 R	710,00	
	F 16 S (PR-2B)**	Z8	574728 R	131,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	F 20 S (PR-2B)**	Z8	574730 R	131,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	F 26 S (PR-2B)**	Z8	574732 R	131,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	F 32 S (PR-2B)	Z8	574734 R	144,00		M 15 S (PR-2B)	Z8	574738 R	131,00	
	H 16*		570320	177,00		M 18 S (PR-2B)	Z8	574740 R	131,00	
	H 20*		570350	177,00		M 22 S (PR-2B)	Z8	574742 R	131,00	
	H 25*		570360	177,00		M 28 S (PR-2B)	Z8	574744 R	131,00	
	H 26*		570370	177,00		M 35 S (PR-2B)	Z8	574746 R	144,00	
	H 32		570380	177,00	Jäger - Aquatec	V 15		570115	163,00	
	U 16*		570765	184,00	Kupfer - Press Typ V	V 18		570125	163,00	
	U 20*		570775	184,00		V 22		570135	163,00	
	U 25*		570780	184,00		V 28		570145	163,00	
	U 26* ¹²⁾		570750	215,00		V 35		570155	163,00	
	U 32		570785	215,00		V 42		570165	379,00	
	B 16*		570850	214,00		V 42 (PR-2B)	Z2	572850 R	339,00	
	B 20*		570860	214,00		V 54		570175	390,00	
	B 26		570870	236,00		V 54 (PR-2B)	Z2	572851 R	367,00	
	B 32		570880	236,00		V 15 S (PR-2B)	Z8	574752 R	131,00	
IVT Edelstahl- Presssystem	M 15		570110	163,00		V 18 S (PR-2B)	Z8	574756 R	131,00	
	M 18 ¹⁾		570120	163,00		V 22 S (PR-2B)	Z8	574758 R	131,00	
	M 22		570130	163,00		V 28 S (PR-2B)	Z8	574760 R	131,00	
	M 28 ¹⁾		570140	163,00		V 35 S (PR-2B)	Z8	574762 R	144,00	
	M 35		570150	163,00						
	M 42 (PR-3S)	Z2	572706 R	710,00						
	M 54 (PR-3S)	Z2	572708 R	710,00						
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00						
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00						
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00						
	M 15 S (PR-2B)	Z8	574738 R	131,00						
	M 18 S (PR-2B)	Z8	574740 R	131,00						
	M 22 S (PR-2B)	Z8	574742 R	131,00						
	M 28 S (PR-2B)	Z8	574744 R	131,00						
	M 35 S (PR-2B)	Z8	574746 R	144,00						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Jansen AG JANSEN COMISA	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 63 (PZ-S)		572405	680,00	
	TH 14 S (PR-2B)**	Z8	574778 R	131,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	Jaraflex- Presssystem	TH 14*		570455	196,00
		TH 16*		570460	196,00
		TH 17*		570462	196,00
		TH 18*		570465	196,00
		TH 20*		570470	196,00
		TH 25*		570495	196,00
TH 26*			570475	196,00	
TH 32			570480	196,00	
TH 40			570485	260,00	
TH 50 (PZ-S)			572400	680,00	
TH 63 (PZ-S)			572405	680,00	
TH 14 S (PR-2B)**		Z8	574778 R	131,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 17 S (PR-2B)**		Z8	574784 R	131,00	
TH 18 S (PR-2B)**		Z8	574786 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
TH 25 S (PR-2B)**		Z8	574792 R	131,00	
TH 26 S (PR-2B)**		Z8	574794 R	131,00	
TH 32 S (PR-2B)		Z8	574798 R	144,00	
JUNGWOOD JWPress	VUS 1/2" (OD 15,9 mm)		571770	197,00	
	VUS 3/4" (OD 22,2 mm)		571775	197,00	
	VUS 1" (OD 28,6 mm)		571780	197,00	
	VUS 1 1/4" (OD 34,9 mm)		571785	197,00	
	VUS 1 1/2" (OD 41,3 mm)		571790	379,00	
	VUS 2" (OD 54,0 mm)		571795	390,00	
	VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819 R	640,00	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	640,00	
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00		

K

KAN KAN-therm Press LBP	U 14*		570760	184,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00
	U 40		570790	262,00
	TH 14*		570455	196,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
KAN KAN-therm Inox	M 15		570110	163,00
	M 18 ¹⁾		570120	163,00
	M 22		570130	163,00
	M 28 ¹⁾		570140	163,00
	M 35		570150	163,00
	M 42 (PZ-4G)		570160	530,00
	M 54 (PZ-4G)		570170	530,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
KAN KAN-therm Steel	M 12		570100	163,00
	M 15		570110	163,00
	M 18 ¹⁾		570120	163,00
	M 22		570130	163,00
	M 28 ¹⁾		570140	163,00
	M 35		570150	163,00
	M 42 (PZ-4G)		570160	530,00
	M 54 (PZ-4G)		570170	530,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.220,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
M 12 S (PR-2B)	Z8	574736 R	131,00	
M 15 S (PR-2B)	Z8	574738 R	131,00	
M 18 S (PR-2B)	Z8	574740 R	131,00	
M 22 S (PR-2B)	Z8	574742 R	131,00	
M 28 S (PR-2B)	Z8	574744 R	131,00	
M 35 S (PR-2B)	Z8	574746 R	144,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
KAN KAN-therm UltraPRESS	U 14*		570760	184,00
	U 16*		570765	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 26* ¹²⁾		570750	215,00
	U 32		570785	215,00
	U 40		570790	262,00
	TH 14*		570455	196,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
KE KELIT COPPERFIX Kupfer	M 15		570110	163,00
	M 18		570120	163,00
	M 22		570130	163,00
	M 28		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
KE KELIT KELIT KELOX	U 16*		570765	184,00
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
	U 63 (PZ-S)		572365	680,00
	U 63 (PR-3B)	Z4	572837 R	780,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	KE KELIT KELOX-PPSU-W	U 16*		570765
U 18*			570770	184,00
U 20*			570775	184,00
U 25*			570780	184,00
U 32			570785	215,00
U 40			570790	262,00
U 50			570795	314,00
U 63 (PZ-S)			572365	680,00
U 63 (PR-3B)		Z4	572837 R	780,00
U 75 (PR-3B)		Z4	572828 R	680,00
KE KELIT KELOX-ULTRAX		U 16*		570765
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
	U 63 (PZ-S)		572365	680,00
	U 63 (PR-3B)	Z4	572837 R	780,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	KE KELIT KELOX-ULTRAX-W	U 16*		570765
U 18*			570770	184,00
U 20*			570775	184,00
U 25*			570780	184,00
U 32			570785	215,00
U 40			570790	262,00
U 50			570795	314,00
U 63 (PZ-S)			572365	680,00
U 63 (PR-3B)		Z4	572837 R	780,00
U 75 (PR-3B)		Z4	572828 R	680,00
KE KELIT KELOX-WINDOWX-U		U 16*		570765
	U 18*		570770	184,00
	U 20*		570775	184,00
	U 25*		570780	184,00
	U 32		570785	215,00
	U 40		570790	262,00
	U 50		570795	314,00
	U 63 (PZ-S)		572365	680,00
	U 63 (PR-3B)	Z4	572837 R	780,00
	U 75 (PR-3B)	Z4	572828 R	680,00
	KE KELIT steelFIX C-Stahl	M 15		570110
M 18			570120	163,00
M 22			570130	163,00
M 28			570140	163,00
M 35			570150	163,00
M 42 (PR-3S)		Z2	572706 R	710,00
M 54 (PR-3S)		Z2	572708 R	710,00
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
M 15 S (PR-2B)		Z8	574738 R	131,00
M 18 S (PR-2B)	Z8	574740 R	131,00	
M 22 S (PR-2B)	Z8	574742 R	131,00	
M 28 S (PR-2B)	Z8	574744 R	131,00	
M 35 S (PR-2B)	Z8	574746 R	144,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
KE KELIT steelFIX Edelstahl	M 15		570110	163,00	KISAN Kistal C	M 15		570110	163,00
	M 18		570120	163,00		M 18		570120	163,00
	M 22		570130	163,00		M 22		570130	163,00
	M 28		570140	163,00		M 28		570140	163,00
	M 35		570150	163,00		M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00		M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00		M 54 (PR-3S)	Z2	572708 R	710,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	M 15 S (PR-2B)	Z8	574738 R	131,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	M 18 S (PR-2B)	Z8	574740 R	131,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00		M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00		M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00		M 35 S (PR-2B)	Z8	574746 R	144,00
	KEMBLA KemPress (AUS)	VAU 15 (OD 12,7 mm)		572687		168,00	KISAN Kistal Inox	M 15	
VAU 20 (OD 19,1 mm)			572689	168,00	M 18			570120	163,00
VAU 25 (OD 25,4 mm)			572691	168,00	M 22			570130	163,00
VAU 32 (OD 31,8 mm)			572693	177,00	M 28			570140	163,00
VAU 40 (OD 38,1 mm)			572695	262,00	M 35			570150	163,00
VAU 50 (OD 50,8 mm)			572697	464,00	M 42 (PR-3S)	Z2		572706 R	710,00
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)		572687	168,00	M 54 (PR-3S)	Z2	572708 R	710,00	
	VAU 20 (OD 19,1 mm)		572689	168,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	VAU 25 (OD 25,4 mm)		572691	168,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	VAU 32 (OD 31,8 mm)		572693	177,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	VAU 40 (OD 38,1 mm)		572695	262,00	M 15 S (PR-2B)	Z8	574738 R	131,00	
	VAU 50 (OD 50,8 mm)		572697	464,00	M 18 S (PR-2B)	Z8	574740 R	131,00	
KISAN Kisan KD	KI 16*		571360	208,00	M 22 S (PR-2B)	Z8	574742 R	131,00	
	KI 20*		571370	208,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
	KI 25*		571375	208,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
	TH 16*		570460	196,00					
	TH 20*		570470	196,00					
	TH 25*		570495	196,00					
	TH 16 S (PR-2B)**	Z8	574782 R	131,00					
	TH 20 S (PR-2B)**	Z8	574788 R	131,00					
	TH 25 S (PR-2B)**	Z8	574792 R	131,00					
			574798 R	144,00					
KISAN Kisan WL	KI 16*		571360	208,00					
	KI 20*		571370	208,00					
	KI 25*		571375	208,00					
	KI 32		571380	279,00					
	TH 16*		570460	196,00					
	TH 20*		570470	196,00					
	TH 25*		570495	196,00					
	TH 32		570480	196,00					
	TH 16 S (PR-2B)**	Z8	574782 R	131,00					
	TH 20 S (PR-2B)**	Z8	574788 R	131,00					
KISAN Kisan WM	KI 16*		571360	208,00					
	KI 20*		571370	208,00					
	KI 25*		571375	208,00					
	KI 32		571380	279,00					
	TH 32 S (PR-2B)	Z8	574798 R	144,00					
KISAN Kisan WR	U 20*		570775	184,00					
	U 25*		570780	184,00					
	U 32		570785	215,00					
	U 40		570790	262,00					
	U 50		570795	314,00					
	U 63 (PZ-S)		572365	680,00					
	U 75 (PR-3B)		572828 R	680,00					
	TH 20*		570470	196,00					
	TH 25*		570495	196,00					
	TH 32		570480	196,00					
	TH 40		570485	260,00					
	TH 50 (PZ-S)		572400	680,00					
	TH 63 (PZ-S)		572405	680,00					
	TH 20 S (PR-2B)**	Z8	574788 R	131,00					
	TH 25 S (PR-2B)**	Z8	574792 R	131,00					
	TH 32 S (PR-2B)	Z8	574798 R	144,00					

L

LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		571770	197,00
	VUS ¾" (OD 22,2 mm)		571775	197,00
	VUS 1" (OD 28,6 mm)		571780	197,00
	VUS 1¼" (OD 34,9 mm)		571785	197,00
	VUS 1½" (OD 41,3 mm)		571790	379,00
	VUS 2" (OD 54,0 mm)		571795	390,00
LK Systems LK >B-Press	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	640,00
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	640,00
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	680,00
	V 12		570107	163,00
	V 15		570115	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
LK Systems LK >B-Press Elförsinkat	V 54		570175	390,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
	V 15 S (PR-2B)	Z8	574752 R	131,00
	V 18 S (PR-2B)	Z8	574756 R	131,00
	V 22 S (PR-2B)	Z8	574758 R	131,00
	V 28 S (PR-2B)	Z8	574760 R	131,00
	V 35 S (PR-2B)	Z8	574762 R	144,00
	V 12		570107	163,00
	V 15		570115	163,00
	V 18		570125	163,00
	V 22		570135	163,00
	V 28		570145	163,00
	V 35		570155	163,00
	V 42		570165	379,00
	V 54		570175	390,00
	V 12 S (PR-2B)	Z8	574748 R	131,00
V 15 S (PR-2B)	Z8	574752 R	131,00	
V 18 S (PR-2B)	Z8	574756 R	131,00	
V 22 S (PR-2B)	Z8	574758 R	131,00	
V 28 S (PR-2B)	Z8	574760 R	131,00	
V 35 S (PR-2B)	Z8	574762 R	144,00	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
Multicap Industrial multitubo systems MM	H 16*		570320	177,00	NUPI Industrie Italiane Multinupi	B 16*		570850	214,00
	H 20*		570350	177,00		B 18*		570855	214,00
	H 25*		570360	177,00		B 20*		570860	214,00
	H 26*		570370	177,00		B 26		570870	236,00
	H 32		570380	177,00		B 32		570880	236,00
	RFz 16*		571325	204,00		F 16*		570717	187,00
	RFz 20*		571330	204,00		F 18*		570720	187,00
	RFz 25		571335	204,00		F 20*		570727	187,00
	RFz 32		571340	204,00		F 26*		570730	202,00
	TH 16*		570460	196,00		F 32		570735	202,00
	TH 20*		570470	196,00		F 16 S (PR-2B)**	Z8	574728 R	131,00
	TH 25*		570495	196,00		F 20 S (PR-2B)**	Z8	574730 R	131,00
	TH 26*		570475	196,00		F 26 S (PR-2B)**	Z8	574732 R	131,00
	TH 32		570480	196,00		F 32 S (PR-2B)	Z8	574734 R	144,00
	TH 40		570485	260,00		H 16*		570320	177,00
	TH 50 (PZ-S)		572400	680,00		H 18*		570340	177,00
	TH 63 (PZ-S)		572405	680,00		H 20*		570350	177,00
	THz 75 (PR-3B)	Z4	572829 R	640,00		H 25*		570360	177,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		H 26*		570370	177,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		H 32		570380	177,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00		TH 16*		570460	196,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00		TH 18*		570465	196,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00		TH 20*		570470	196,00
	U 16*		570765	184,00		TH 25*		570495	196,00
	U 20*		570775	184,00		TH 26*		570475	196,00
	U 25*		570780	184,00		TH 32		570480	196,00
	U 32		570785	215,00		TH 40		570485	260,00
	U 40		570790	262,00		TH 50 (PZ-S)		572400	680,00
	U 50		570795	314,00		TH 63 (PZ-S)		572405	680,00
	U 63 (PZ-S)		572365	680,00		TH 16 S (PR-2B)**	Z8	574782 R	131,00
	U 63 (PR-3B)	Z4	572837 R	780,00		TH 20 S (PR-2B)**	Z8	574788 R	131,00
	U 75 (PR-3B)	Z4	572828 R	680,00		TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 16*		570460	196,00		TH 32 S (PR-2B)	Z8	574798 R	144,00
TH 20*		570470	196,00	U 14*		570760	184,00		
TH 26*		570475	196,00	U 16*		570765	184,00		
TH 32		570480	196,00	U 18*		570770	184,00		
TH 40		570485	260,00	U 20*		570775	184,00		
TH 50 (PZ-S)		572400	680,00	U 25*		570780	184,00		
TH 63 (PZ-S)		572405	680,00	U 26** ¹²⁾		570750	215,00		
TH 16 S (PR-2B)**	Z8	574782 R	131,00	U 32		570785	215,00		
TH 20 S (PR-2B)**	Z8	574788 R	131,00	U 40		570790	262,00		
TH 26 S (PR-2B)**	Z8	574794 R	131,00	U 50		570795	314,00		
TH 32 S (PR-2B)	Z8	574798 R	144,00	U 63 (PR-3B)	Z4	572837 R	780,00		
				U 63 (PZ-S)		572365	680,00		
N					Nussbaum	VMP ¾" (OD 12,2 mm)		571740	226,00
NEUTHERM	H 16*		570320	177,00	Optifitt-Press	VMP ½" G (OD 21,3 mm)		571766 R	226,00
MEKUPRESS-HT	H 20*		570350	177,00		VMPz ¾" (OD 26,9 mm)		571764	226,00
	H 26*		570370	177,00		VMPz 1" (OD 33,7 mm)		571767	226,00
	H 32		570380	177,00		VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00
	H 40 (PZ-4G)		570390	600,00		VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	510,00
	U 40		570790	262,00		VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	510,00
NIBCO	VUS ½" (OD 15,9 mm)		571770	197,00	Nussbaum	VRX 16		571750	206,00
Press System	VUS ¾" (OD 22,2 mm)		571775	197,00	Optiflex-Flowpress	VRX 20		571752	206,00
Copper	VUS 1" (OD 28,6 mm)		571780	197,00		VRX 25		571754	226,00
	VUS 1¼" (OD 34,9 mm)		571785	197,00		VRX 32		571756	226,00
	VUS 1½" (OD 41,3 mm)		571790	379,00		VRX 40		571758	314,00
	VUS 2" (OD 54,0 mm)		571795	390,00		VRX 50		571760	367,00
NICOLL FLUXO	TH 16*		570460	196,00		VRX 63		571797	590,00
	TH 20*		570470	196,00	Nussbaum	V 15		570115	163,00
	TH 26*		570475	196,00	Optipress	V 18		570125	163,00
	TH 32		570480	196,00	Aquaplus	V 22		570135	163,00
	TH 40		570485	260,00		V 28		570145	163,00
	TH 50 (PZ-S)		572400	680,00		V 35		570155	163,00
	TH 63 (PZ-S)		572405	680,00		V 42		570165	379,00
	THz 75 (PR-3B)	Z4	572829 R	640,00		V 42 (PR-2B)	Z2	572850 R	339,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		V 54		570175	390,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		V 54 (PR-2B)	Z2	572851 R	367,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00		Vfz 64,0 (PR-3B)	Z5	572815 R	640,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00		Vfz 76,1 (PR-3B)	Z5	572816 R	640,00
						Vfz 88,9 (PR-3B)	Z5	572817 R	680,00
						Vfz 108,0 (PR-3B)	Z5	572818 R	680,00
						V 15 S (PR-2B)	Z8	574752 R	131,00
						V 18 S (PR-2B)	Z8	574756 R	131,00
						V 22 S (PR-2B)	Z8	574758 R	131,00
						V 28 S (PR-2B)	Z8	574760 R	131,00
						V 35 S (PR-2B)	Z8	574762 R	144,00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
PLASTICA ALFA Multyplex Thermo	TH 16*		570460	196,00	POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich) M 35 POLYSAN- C-Stahl-Press- System M	M 15		570110	163,00
	TH 20*		570470	196,00		M 18		570120	163,00
	TH 26*		570475	196,00		M 22		570130	163,00
	TH 32		570480	196,00		M 28		570140	163,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		M 35		570150	163,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		M 42 (PR-3S)	Z2	572706 R	710,00
PLASTICA ALFA Multyplex Thermo Plus	TH 20*		570470	196,00	M 54 (PR-3S)	Z2	572708 R	710,00	
	TH 26*		570475	196,00	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	TH 32		570480	196,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	TH 20 S (PR-2B)**	Z8	574794 R	131,00	M 15 S (PR-2B)	Z8	574738 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	M 18 S (PR-2B)	Z8	574740 R	131,00	
PLÁSTICOS FERRO FERROPLAST GPF MULT Pressfitting MULTICAPA	U 16*		570765	184,00	M 22 S (PR-2B)	Z8	574742 R	131,00	
	U 20*		570775	184,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
	U 25*		570780	184,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
	U 32		570785	215,00	POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich) M 35 POLYSAN- Edelstahl	M 15 M 18 M 22 M 28 M 35	570110 570120 570130 570140 570150	163,00 163,00 163,00 163,00 163,00	
	U 16*		570765	184,00	M 42 (PR-3S)	Z2	572706 R	710,00	
	U 20*		570775	184,00	M 54 (PR-3S)	Z2	572708 R	710,00	
PLÁSTICOS FERRO FERROPLAST GPF PPSU Pressfitting PEX y MULTICAPA	U 25*		570780	184,00	Press-System 1.4520	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	U 32		570785	215,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	RFz 16*		571325	204,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	RFz 20*		571330	204,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	RFz 25		571335	204,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	RFz 32		571340	204,00		M 22 S (PR-2B)	Z8	574742 R	131,00
PLUMBING PLUS EZIPEX Crimp (AUS)	K16/P18*		572600	204,00	M 28 S (PR-2B)	Z8	574744 R	131,00	
	K/20*		572605	204,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
	K/25*		572610	204,00	POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich) M 35 POLYSAN- Edelstahl	M 15 M 18 M 22 M 28 M 35	570110 570120 570130 570140 570150	163,00 163,00 163,00 163,00 163,00	
	K32		572615	204,00	M 42 (PR-3S)	Z2	572706 R	710,00	
	K1/40		572620	204,00	M 54 (PR-3S)	Z2	572708 R	710,00	
	K1/50		572625	335,00	M 76.1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
PLUMBING PLUS EZIPEX Gas (AUS)	K16/P18*		572600	204,00	Press-System Gas	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	K/20*		572605	204,00		M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	K/25*		572610	204,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	K32		572615	204,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	K1/40		572620	204,00		M 22 S (PR-2B)	Z8	574742 R	131,00
	K1/50		572625	335,00		M 28 S (PR-2B)	Z8	574744 R	131,00
PLUMBING PLUS EZIPRESS Gas (AUS)	VAU 15 (OD 12,7 mm)		572687	168,00	M 35 S (PR-2B)	Z8	574746 R	144,00	
	VAU 20 (OD 19,1 mm)		572689	168,00	POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich) M 35 POLYSAN- Edelstahl	M 15 M 18 M 22 M 28 M 35	570110 570120 570130 570140 570150	163,00 163,00 163,00 163,00 163,00	
	VAU 25 (OD 25,4 mm)		572691	168,00	M 42 (PR-3S)	Z2	572706 R	710,00	
	VAU 32 (OD 31,8 mm)		572693	177,00	M 54 (PR-3S)	Z2	572708 R	710,00	
	VAU 40 (OD 38,1 mm)		572695	262,00	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	VAU 50 (OD 50,8 mm)		572697	464,00	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
PLUMBING PLUS EZIPRESS Solar (AUS)	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	640,00	Press-System Wasser	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	640,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	680,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	VAU 15 (OD 12,7 mm)		572687	168,00		M 22 S (PR-2B)	Z8	574742 R	131,00
	VAU 20 (OD 19,1 mm)		572689	168,00		M 28 S (PR-2B)	Z8	574744 R	131,00
	VAU 25 (OD 25,4 mm)		572691	168,00		M 35 S (PR-2B)	Z8	574746 R	144,00
PLUMBING PLUS EZIPRESS Water (AUS)	VAU 32 (OD 31,8 mm)		572693	177,00	POLYSAN Handelsges. m.b.H. & Co KG (Krems/Österreich) TH 20* POLYSAN- Press-System	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00
	VAU 40 (OD 38,1 mm)		572695	262,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00
	VAU 50 (OD 50,8 mm)		572697	464,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	640,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	640,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	680,00		M 22 S (PR-2B)	Z8	574742 R	131,00
POLYPIPE POLYSURE	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	131,00	TH 16* TH 17* TH 18* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) THz 75 (PR-3B) TH 14 S (PR-2B)** TH 16 S (PR-2B)** TH 17 S (PR-2B)** TH 18 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)** TH 32 S (PR-2B)	570455 570460 570462 570465 570470 570475 570480 570485 572400 572405 572829 R 574778 R 574782 R 574784 R 574786 R 574788 R 574794 R 574798 R	196,00 196,00 196,00 196,00 196,00 196,00 196,00 260,00 680,00 680,00 640,00 131,00 131,00 131,00 131,00 131,00 131,00 131,00		
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	131,00					
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	144,00					
	TH 10*		570467	196,00					
	TH 15*		570457	196,00					
	TH 22*		570472	196,00					
TH 28		570477	196,00						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Osterreich)	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 17*		570462	196,00	
	TH 18*		570465	196,00	
	TH 20*		570470	196,00	
	POLYSAN-Hencco-Press-System	TH 26*		570475	196,00
		HE 32		571900	235,00
		HEz 40		571904	340,00
		TH 14 S (PR-2B)**	Z8	574778 R	131,00
		TH 16 S (PR-2B)**	Z8	574782 R	131,00
		TH 17 S (PR-2B)**	Z8	574784 R	131,00
		TH 18 S (PR-2B)**	Z8	574786 R	131,00
		TH 20 S (PR-2B)**	Z8	574788 R	131,00
		TH 26 S (PR-2B)**	Z8	574794 R	131,00
POLYSAN (España) „Rainbow“		U 16*		570765	184,00
	U 18*		570770	184,00	
	U 20*		570775	184,00	
	U 25*		570780	184,00	
	U 32		570785	215,00	
	U 40		570790	262,00	
	U 50		570795	314,00	
	U 63 (PR-3B)	Z4	572837 R	780,00	
	U 63 (PZ-S)		572365	680,00	
	Prandelli Multyrama Pf	H 14*		570310	177,00
H 16*			570320	177,00	
H 18*			570340	177,00	
H 20*			570350	177,00	
H 26*			570370	177,00	
H 32			570380	177,00	
U 40			570790	262,00	
U 50			570795	314,00	
U 63 (PR-3B)		Z4	572837 R	780,00	
Prandelli Multyrama Pfm		H 16*		570320	177,00
	H 18*		570340	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
	H 32		570380	177,00	
	TH 16*		570460	196,00	
	TH 18*		570465	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 18 S (PR-2B)**	Z8	574786 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	U 16*		570765	184,00	
	U 18*		570770	184,00	
	U 20*		570775	184,00	
U 40		570790	262,00		
U 50		570795	314,00		
U 63 (PR-3B)	Z4	572837 R	780,00		
PURMO Cleverfit Radial	F 16*		570717	187,00	
	F 20*		570727	187,00	
	F 26*		570730	202,00	
	F 32		570735	202,00	
	F 16 S (PR-2B)**	Z8	574728 R	131,00	
	F 20 S (PR-2B)**	Z8	574730 R	131,00	
	F 26 S (PR-2B)**	Z8	574732 R	131,00	
	F 32 S (PR-2B)	Z8	574734 R	144,00	
	H 16*		570320	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
	H 32		570380	177,00	
	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 17*		570462	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 63 (PZ-S)		572405	680,00	
	TH 14 S (PR-2B)**	Z8	574778 R	131,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 17 S (PR-2B)**	Z8	574784 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	U 16*		570765	184,00	
	U 20*		570775	184,00	
	U 32		570785	215,00	
VP 16*		570910	196,00		
VP 20*		570915	196,00		
VP 25		570920	196,00		
R					
Raccorderie Metallische aesPRES ¹⁾	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Raccorderie Metallische inoxPRES ¹⁾	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
Raccorderie Metallische MARINEPRES ¹⁾	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
Raccorderie Metallische steelPRES ¹⁾	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
RBM Tita-fix	B 14*		570845	214,00	
	B 16*		570850	214,00	
	B 18*		570855	214,00	
	B 20*		570860	214,00	
	B 26		570870	236,00	
	F 16*		570717	187,00	
	F 18*		570720	187,00	
	F 20*		570727	187,00	
	F 16 S (PR-2B)**	Z8	574728 R	131,00	
	F 20 S (PR-2B)**	Z8	574730 R	131,00	
	H 14*		570310	177,00	
	H 16*		570320	177,00	
	H 18*		570340	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
	H 32		570380	177,00	
	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 18*		570465	196,00	
	TH 20*		570470	196,00	
TH 26*		570475	196,00		
TH 32		570480	196,00		
TH 40		570485	260,00		
TH 50 (PZ-S)		572400	680,00		
TH 63 (PZ-S)		572405	680,00		
TH 16 S (PR-2B)**	Z8	574782 R	131,00		
TH 20 S (PR-2B)**	Z8	574788 R	131,00		
TH 26 S (PR-2B)**	Z8	574794 R	131,00		
TH 32 S (PR-2B)	Z8	574798 R	144,00		
U 14*		570760	184,00		
U 16*		570765	184,00		
U 18*		570770	184,00		
U 20*		570775	184,00		
RBM Tita-gas	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	Redi Nicol Fluxo	TH 14*		570455	196,00
		TH 16*		570460	196,00
		TH 18*		570465	196,00
		TH 20*		570470	196,00
		TH 26*		570475	196,00
		TH 32		570480	196,00
		TH 40		570485	260,00
TH 50 (PZ-S)			572400	680,00	
TH 63 (PZ-S)			572405	680,00	
THz 75 (PR-3B)		Z4	572829 R	640,00	
TH 16 S (PR-2B)**	Z8	574782 R	131,00		
TH 20 S (PR-2B)**	Z8	574788 R	131,00		
TH 26 S (PR-2B)**	Z8	574794 R	131,00		
TH 32 S (PR-2B)	Z8	574798 R	144,00		
Redi Nicol Fluxo Gas	TH 16*		570460	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
TH 26 S (PR-2B)**	Z8	574794 R	131,00		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
RIFENG U PRESS FITTING (F5)	U 14*		570760	184,00	RUBINETTERIE Bresciane Bonomi TURBO INOX GAS	M 15		570110	163,00
	U 16*		570765	184,00		M 18		570120	163,00
	U 18*		570770	184,00		M 22		570130	163,00
	U 20*		570775	184,00		M 28		570140	163,00
	U 25*		570780	184,00		M 35		570150	163,00
	U 32		570785	215,00		M 42 (PR-3S)	Z2	572706 R	710,00
	U 40		570790	262,00		M 54 (PR-3S)	Z2	572708 R	710,00
	U 50		570795	314,00		M 15 S (PR-2B)	Z8	574738 R	131,00
	U 63 (PZ-S)		572365	680,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	U 63 (PR-3B)	Z4	572837 R	780,00		M 22 S (PR-2B)	Z8	574742 R	131,00
	U 75 (PR-3B)	Z4	572828 R	680,00		M 28 S (PR-2B)	Z8	574744 R	131,00
						M 35 S (PR-2B)	Z8	574746 R	144,00
	RIFENG TH PRESS FITTING (F9)	TH 16*		570460		196,00	RUBINETTERIE Bresciane Bonomi TURBO STEEL	M 15	
TH 20*			570470	196,00	M 18			570120	163,00
TH 25*			570495	196,00	M 22			570130	163,00
TH 26*			570475	196,00	M 28			570140	163,00
TH 32			570480	196,00	M 35			570150	163,00
TH 40			570485	260,00	M 42 (PR-3S)	Z2		572706 R	710,00
TH 50 (PZ-S)			572400	680,00	M 54 (PR-3S)	Z2		572708 R	710,00
TH 63 (PZ-S)			572405	680,00	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101 R	1.220,00
					M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110 R	1.430,00
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579111 R	1.430,00
RIQUIER A SERTIR	Rfz 12*		571320	204,00	TURBO PRESS	M 15 S (PR-2B)	Z8	574738 R	131,00
	Rfz 16*		571325	204,00		M 18 S (PR-2B)	Z8	574740 R	131,00
	Rfz 20*		571330	204,00		M 22 S (PR-2B)	Z8	574742 R	131,00
	Rfz 25		571335	204,00		M 28 S (PR-2B)	Z8	574744 R	131,00
						M 35 S (PR-2B)	Z8	574746 R	144,00
						B 14*		570845	214,00
						B 16*		570850	214,00
RIQUIER Système multicouche	TH 16*		570460	196,00	TURBO PRESS	B 18*		570855	214,00
	TH 20*		570470	196,00		B 20*		570860	214,00
	TH 26*		570475	196,00		B 26		570870	236,00
	TH 32		570480	196,00		B 32		570880	236,00
	TH 40		570485	260,00		H 14*		570310	177,00
	TH 50 (PZ-S)		572400	680,00		H 16*		570320	177,00
	TH 63 (PZ-S)		572405	680,00		H 18*		570340	177,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		H 20*		570350	177,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		H 26*		570370	177,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00		H 32		570380	177,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00		TH 14*		570455	196,00
	U 16*		570765	184,00		TH 16*		570460	196,00
	U 20*		570775	184,00		TH 18*		570465	196,00
	U 32		570785	215,00		TH 20*		570470	196,00
	U 40		570790	262,00		TH 26*		570475	196,00
U 50		570795	314,00	TH 32		570480	196,00		
Roth PressCheck	RN 14*		572672	184,00	TH 40		570485	260,00	
	RN 16		572670	184,00	TH 50 (PZ-S)		572400	680,00	
	RN 17*		572674	184,00	TH 63 (PZ-S)		572405	680,00	
	RN 20*		572676	184,00	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	RN 25/26		572678	184,00	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	RN 32		572680	215,00	TH 26 S (PR-2B)**	Z8	574794 R	131,00	
	RN 40 (PR-3S)	Z2	572714 R	710,00	TH 32 S (PR-2B)	Z8	574798 R	144,00	
	RN 50 (PR-3S)	Z2	572716 R	710,00	U 14*		570760	184,00	
	RNz 63 (PR-3B)	Z4	572836 R	780,00	U 16*		570765	184,00	
					U 18*		570770	184,00	
					U 20*		570775	184,00	
Rubinetteria Bresciane Bonomi TURBO CuNi	M 15		570110	163,00	U 26 ¹²⁾		570750	215,00	
	M 18		570120	163,00	U 32		570785	215,00	
	M 22		570130	163,00	RUBINETTERIE Bresciane Bonomi TURBO PRESS GAS	TH 16*		570460	196,00
	M 28		570140	163,00		TH 20*		570470	196,00
	M 35		570150	163,00		TH 26*		570475	196,00
	M 42 (PR-3S)	Z2	572706 R	710,00		TH 32		570480	196,00
	M 54 (PR-3S)	Z2	572708 R	710,00		TH 16 S (PR-2B)**	Z8	574782 R	131,00
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		TH 20 S (PR-2B)**	Z8	574788 R	131,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		TH 26 S (PR-2B)**	Z8	574794 R	131,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		TH 32 S (PR-2B)	Z8	574798 R	144,00
	M 15 S (PR-2B)	Z8	574738 R	131,00		U 14*		570760	184,00
	M 18 S (PR-2B)	Z8	574740 R	131,00		U 16*		570765	184,00
	M 22 S (PR-2B)	Z8	574742 R	131,00		U 18*		570770	184,00
	M 28 S (PR-2B)	Z8	574744 R	131,00		U 20*		570775	184,00
	M 35 S (PR-2B)	Z8	574746 R	144,00		U 26 ¹²⁾		570750	215,00
				U 32			570785	215,00	
				TH 16*			570460	196,00	
				TH 20*		570470	196,00		
				TH 26*		570475	196,00		
				TH 32		570480	196,00		
				TH 16 S (PR-2B)**	Z8	574782 R	131,00		
				TH 20 S (PR-2B)**	Z8	574788 R	131,00		
				TH 26 S (PR-2B)**	Z8	574794 R	131,00		
				TH 32 S (PR-2B)	Z8	574798 R	144,00		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€		
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935	196,00	SANHA NiroTherm Industry Serie 98000	SA 15		570935	196,00		
	SA 18		570940	196,00		SA 18		570940	196,00		
	SA 22		570945	196,00		SA 22		570945	196,00		
	SA 28		570950	196,00		SA 28		570950	196,00		
	SA 35		570955	196,00		SA 35		570955	196,00		
	M 15		570110	163,00		M 15		570110	163,00		
	M 18		570120	163,00		M 18		570120	163,00		
	M 22		570130	163,00		M 22		570130	163,00		
	M 28		570140	163,00		M 28		570140	163,00		
	M 35		570150	163,00		M 35		570150	163,00		
	M 42 (PR-3S)	Z2	572706 R	710,00		M 42 (PR-3S)	Z2	572706 R	710,00		
	M 54 (PR-3S)	Z2	572708 R	710,00		M 54 (PR-3S)	Z2	572708 R	710,00		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		
	M 15 S (PR-2B)	Z8	574738 R	131,00		M 15 S (PR-2B)	Z8	574738 R	131,00		
	M 18 S (PR-2B)	Z8	574740 R	131,00		M 18 S (PR-2B)	Z8	574740 R	131,00		
	M 22 S (PR-2B)	Z8	574742 R	131,00		M 22 S (PR-2B)	Z8	574742 R	131,00		
	M 28 S (PR-2B)	Z8	574744 R	131,00		M 28 S (PR-2B)	Z8	574744 R	131,00		
	M 35 S (PR-2B)	Z8	574746 R	144,00		M 35 S (PR-2B)	Z8	574746 R	144,00		
	V 15		570115	163,00		V 15		570115	163,00		
	V 18		570125	163,00		V 18		570125	163,00		
	V 22		570135	163,00		V 22		570135	163,00		
	V 28		570145	163,00		V 28		570145	163,00		
	V 35		570155	163,00		V 35		570155	163,00		
	V 42		570165	379,00		V 42		570165	379,00		
	V 42 (PR-2B)	Z2	572850 R	339,00		V 42 (PR-2B)	Z2	572850 R	339,00		
	V 54		570175	390,00		V 54		570175	390,00		
	V 54 (PR-2B)	Z2	572851 R	367,00		V 54 (PR-2B)	Z2	572851 R	367,00		
	V 15 S (PR-2B)	Z8	574752 R	131,00		V 15 S (PR-2B)	Z8	574752 R	131,00		
	V 18 S (PR-2B)	Z8	574756 R	131,00		V 18 S (PR-2B)	Z8	574756 R	131,00		
	V 22 S (PR-2B)	Z8	574758 R	131,00		V 22 S (PR-2B)	Z8	574758 R	131,00		
	V 28 S (PR-2B)	Z8	574760 R	131,00		V 28 S (PR-2B)	Z8	574760 R	131,00		
	V 35 S (PR-2B)	Z8	574762 R	144,00		V 35 S (PR-2B)	Z8	574762 R	144,00		
	SANHA NiroTherm Serie 91000	SA 15		570935		196,00	SANHA-Press Chrom Serie 16000	SA 12		570930	284,00
		SA 18		570940		196,00		SA 15		570935	196,00
		SA 22		570945		196,00		SA 18		570940	196,00
		SA 28		570950		196,00		SA 22		570945	196,00
		SA 35		570955		196,00		SA 28		570950	196,00
		M 15		570110		163,00		M 12		570100	163,00
M 18			570120	163,00	M 15			570110	163,00		
M 22			570130	163,00	M 18			570120	163,00		
M 28			570140	163,00	M 22			570130	163,00		
M 35			570150	163,00	M 28			570140	163,00		
M 42 (PR-3S)		Z2	572706 R	710,00	M 12 S (PR-2B)	Z8		574736 R	131,00		
M 54 (PR-3S)		Z2	572708 R	710,00	M 15 S (PR-2B)	Z8		574738 R	131,00		
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	M 18 S (PR-2B)	Z8		574740 R	131,00		
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	M 22 S (PR-2B)	Z8		574742 R	131,00		
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	M 28 S (PR-2B)	Z8		574744 R	131,00		
M 15 S (PR-2B)		Z8	574738 R	131,00	V 12			570107	163,00		
M 18 S (PR-2B)		Z8	574740 R	131,00	V 15			570115	163,00		
M 22 S (PR-2B)		Z8	574742 R	131,00	V 18			570125	163,00		
M 28 S (PR-2B)		Z8	574744 R	131,00	V 22			570135	163,00		
M 35 S (PR-2B)		Z8	574746 R	144,00	V 28			570145	163,00		
V 15			570115	163,00	V 12 S (PR-2B)	Z8		574748 R	131,00		
V 18			570125	163,00	V 15 S (PR-2B)	Z8		574752 R	131,00		
V 22			570135	163,00	V 18 S (PR-2B)	Z8		574756 R	131,00		
V 28			570145	163,00	V 22 S (PR-2B)	Z8		574758 R	131,00		
V 35			570155	163,00	V 28 S (PR-2B)	Z8		574760 R	131,00		
V 42			570165	379,00							
V 42 (PR-2B)		Z2	572850 R	339,00							
V 54			570175	390,00							
V 54 (PR-2B)		Z2	572851 R	367,00							
V 15 S (PR-2B)		Z8	574752 R	131,00							
V 18 S (PR-2B)		Z8	574756 R	131,00							
V 22 S (PR-2B)		Z8	574758 R	131,00							
V 28 S (PR-2B)		Z8	574760 R	131,00							
V 35 S (PR-2B)		Z8	574762 R	144,00							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		570930	284,00	
	SA 14		570932	284,00	
	SA 15		570935	196,00	
	SA 16		570937	196,00	
	SA 18		570940	196,00	
	SA 22		570945	196,00	
	SA 28		570950	196,00	
	SA 35		570955	196,00	
	M 12		570100	163,00	
	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	M 12 S (PR-2B)	Z8	574736 R	131,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
	V 12		570107	163,00	
	V 14		570112	163,00	
	VG 14		570132	163,00	
	V 15		570115	163,00	
	V 16		570117	163,00	
	VG 16		570137	163,00	
	V 18		570125	163,00	
	V 22		570135	163,00	
	V 28		570145	163,00	
	V 35		570155	163,00	
	V 42		570165	379,00	
	V 42 (PR-2B)	Z2	572850 R	339,00	
	V 54		570175	390,00	
	V 54 (PR-2B)	Z2	572851 R	367,00	
	V 12 S (PR-2B)	Z8	574748 R	131,00	
	VG 14 S (PR-2B)	Z8	574750 R	131,00	
	V 15 S (PR-2B)	Z8	574752 R	131,00	
	VG 16 S (PR-2B)	Z8	574754 R	131,00	
	V 18 S (PR-2B)	Z8	574756 R	131,00	
	V 22 S (PR-2B)	Z8	574758 R	131,00	
	V 28 S (PR-2B)	Z8	574760 R	131,00	
	V 35 S (PR-2B)	Z8	574762 R	144,00	
	SANHA-Press Pressfittings Serie 6000	SA 12		570930	284,00
		SA 14		570932	284,00
		SA 15		570935	196,00
SA 16			570937	196,00	
SA 18			570940	196,00	
SA 22			570945	196,00	
SA 28			570950	196,00	
SA 35			570955	196,00	
M 12			570100	163,00	
M 15			570110	163,00	
M 18			570120	163,00	
M 22			570130	163,00	
M 28			570140	163,00	
M 35			570150	163,00	
M 42 (PR-3S)		Z2	572706 R	710,00	
M 54 (PR-3S)		Z2	572708 R	710,00	
XP 64,0 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.110,00	
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.220,00	
M 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
M 12 S (PR-2B)		Z8	574736 R	131,00	
M 15 S (PR-2B)		Z8	574738 R	131,00	
M 18 S (PR-2B)		Z8	574740 R	131,00	
M 22 S (PR-2B)		Z8	574742 R	131,00	
M 28 S (PR-2B)		Z8	574744 R	131,00	
M 35 S (PR-2B)		Z8	574746 R	144,00	
V 12			570107	163,00	
V 14			570112	163,00	
VG 14			570132	163,00	
V 15			570115	163,00	
V 16			570117	163,00	
VG 16			570137	163,00	
V 18			570125	163,00	
V 22			570135	163,00	
V 28			570145	163,00	
V 35			570155	163,00	
V 42			570165	379,00	
V 42 (PR-2B)		Z2	572850 R	339,00	
V 54			570175	390,00	
V 54 (PR-2B)		Z2	572851 R	367,00	
V 12 S (PR-2B)		Z8	574748 R	131,00	
VG 14 S (PR-2B)		Z8	574750 R	131,00	
V 15 S (PR-2B)		Z8	574752 R	131,00	
VG 16 S (PR-2B)		Z8	574754 R	131,00	
V 18 S (PR-2B)		Z8	574756 R	131,00	
V 22 S (PR-2B)	Z8	574758 R	131,00		
V 28 S (PR-2B)	Z8	574760 R	131,00		
V 35 S (PR-2B)	Z8	574762 R	144,00		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	284,00	
	SA 15		570935	196,00	
	SA 18		570940	196,00	
	SA 22		570945	196,00	
	SA 28		570950	196,00	
	SA 35		570955	196,00	
	M 12		570100	163,00	
	M 15		570110	163,00	
	M 18		570120	163,00	
	M 22		570130	163,00	
	M 28		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)	Z2	572706 R	710,00	
	M 54 (PR-3S)	Z2	572708 R	710,00	
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.110,00	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.220,00	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 12 S (PR-2B)	Z8	574736 R	131,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
	V 12		570107	163,00	
	V 15		570115	163,00	
	V 18		570125	163,00	
	V 22		570135	163,00	
	V 28		570145	163,00	
	V 35		570155	163,00	
	V 42		570165	379,00	
	V 42 (PR-2B)	Z2	572850 R	339,00	
	V 54		570175	390,00	
	V 54 (PR-2B)	Z2	572851 R	367,00	
	V 12 S (PR-2B)	Z8	574748 R	131,00	
	VG 14 S (PR-2B)	Z8	574750 R	131,00	
	V 15 S (PR-2B)	Z8	574752 R	131,00	
	VG 16 S (PR-2B)	Z8	574754 R	131,00	
	V 18 S (PR-2B)	Z8	574756 R	131,00	
	V 22 S (PR-2B)	Z8	574758 R	131,00	
	V 28 S (PR-2B)	Z8	574760 R	131,00	
	V 35 S (PR-2B)	Z8	574762 R	144,00	
	SANHA PURAPRESS Serie 8000	SA 12		570930	284,00
		SA 14		570932	284,00
		SA 15		570935	196,00
SA 16			570937	196,00	
SA 18			570940	196,00	
SA 22			570945	196,00	
SA 28			570950	196,00	
SA 35			570955	196,00	
M 12			570100	163,00	
M 15 ¹⁾			570110	163,00	
M 18 ¹⁾			570120	163,00	
M 22 ¹⁾			570130	163,00	
M 28 ¹⁾			570140	163,00	
M 35 ¹⁾			570150	163,00	
M 42 (PR-3S)		Z2	572706 R	710,00	
M 54 (PR-3S)		Z2	572708 R	710,00	
XP 64,0 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.110,00	
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.220,00	
M 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
M 12 S (PR-2B)		Z8	574736 R	131,00	
M 15 S (PR-2B)		Z8	574738 R	131,00	
M 18 S (PR-2B)		Z8	574740 R	131,00	
M 22 S (PR-2B)		Z8	574742 R	131,00	
M 28 S (PR-2B)		Z8	574744 R	131,00	
M 35 S (PR-2B)		Z8	574746 R	144,00	
V 12			570107	163,00	
V 14			570112	163,00	
VG 14			570132	163,00	
V 15			570115	163,00	
V 16			570117	163,00	
VG 16			570137	163,00	
V 18			570125	163,00	
V 22			570135	163,00	
V 28			570145	163,00	
V 35			570155	163,00	
V 42			570165	379,00	
V 42 (PR-2B)		Z2	572850 R	339,00	
V 54			570175	390,00	
V 54 (PR-2B)		Z2	572851 R	367,00	
V 12 S (PR-2B)		Z8	574748 R	131,00	
VG 14 S (PR-2B)		Z8	574750 R	131,00	
V 15 S (PR-2B)		Z8	574752 R	131,00	
VG 16 S (PR-2B)		Z8	574754 R	131,00	
V 18 S (PR-2B)		Z8	574756 R	131,00	
V 22 S (PR-2B)	Z8	574758 R	131,00		
V 28 S (PR-2B)	Z8	574760 R	131,00		
V 35 S (PR-2B)	Z8	574762 R	144,00		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
SANHA-Therm Serie 24000	SA 12		570930	284,00	SANITOP PERMATUBO INOX	M 15		570110	163,00	
	SA 15		570935	196,00		M 18 ¹⁾		570120	163,00	
	SA 18		570940	196,00		M 22		570130	163,00	
	SA 22		570945	196,00		M 28 ¹⁾		570140	163,00	
	SA 28		570950	196,00		M 35		570150	163,00	
	SA 35		570955	196,00		M 35 (PR-3S)	Z2	572727 R	710,00	
	M 12		570100	163,00		M 42 (PZ-4G)		570160	530,00	
	M 15		570110	163,00		M 54 (PZ-4G)		570170	530,00	
	M 18		570120	163,00		M 42 (PR-3S)	Z2	572706 R	710,00	
	M 22		570130	163,00		M 54 (PR-3S)	Z2	572708 R	710,00	
	M 28		570140	163,00		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 35		570150	163,00		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 42 (PR-3S)	Z2	572706 R	710,00		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 54 (PR-3S)	Z2	572708 R	710,00		M 12 S (PR-2B)	Z8	574736 R	131,00	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.220,00		M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.220,00		M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00		M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00		M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00		M 35 S (PR-2B)	Z8	574746 R	144,00	
	M 12 S (PR-2B)	Z8	574736 R	131,00						
	M 15 S (PR-2B)	Z8	574738 R	131,00		SANPRO THPRESS	TH 16*	570460	196,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00			TH 20*	570470	196,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00			TH 26*	570475	196,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00			TH 32	570480	196,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00			TH 16 S (PR-2B)**	Z8	574782 R	131,00
	V 12		570107	163,00			TH 20 S (PR-2B)**	Z8	574788 R	131,00
	V 15		570115	163,00			TH 26 S (PR-2B)**	Z8	574794 R	131,00
	V 18		570125	163,00			TH 32 S (PR-2B)	Z8	574798 R	144,00
	V 22		570135	163,00		SATEC SK VITerm	TH 16*	570460	196,00	
	V 28		570145	163,00			TH 18*	570465	196,00	
	V 35		570155	163,00			TH 20*	570470	196,00	
	V 42		570165	379,00			TH 26*	570475	196,00	
	V 42 (PR-2B)	Z2	572850 R	339,00			TH 32	570480	196,00	
	V 54		570175	390,00			U 40	570790	262,00	
	V 54 (PR-2B)	Z2	572851 R	367,00			U 50	570795	314,00	
	V 12 S (PR-2B)	Z8	574748 R	131,00			U 63 (PZ-S)	572365	680,00	
	V 15 S (PR-2B)	Z8	574752 R	131,00		SAVEUR REFLEX	TH 16*	570460	196,00	
	V 18 S (PR-2B)	Z8	574756 R	131,00		PEX Water	TH 20*	570470	196,00	
	V 22 S (PR-2B)	Z8	574758 R	131,00			TH 25*	570495	196,00	
	V 28 S (PR-2B)	Z8	574760 R	131,00			TH 32	570480	196,00	
V 35 S (PR-2B)	Z8	574762 R	144,00	SAVEUR REFLEX PEX-AL-PEX Gas	TH 16*	570460	196,00			
					TH 20*	570470	196,00			
					TH 25*	570495	196,00			
					TH 32	570480	196,00			
					TH 14*	570455	196,00			
					TH 16*	570460	196,00			
					TH 17*	570462	196,00			
					TH 20*	570470	196,00			
					TH 25*	570495	196,00			
					TH 16 S (PR-2B)**	Z8	574782 R	131,00		
					TH 20 S (PR-2B)**	Z8	574788 R	131,00		
				Schwer Fittings	M 12	570100	163,00			
				AQUApress	M 15	570110	163,00			
					M 18	570120	163,00			
					M 22	570130	163,00			
					M 28	570140	163,00			
					M 35	570150	163,00			
					M 42 (PZ-4G)	570160	530,00			
					M 54 (PZ-4G)	570170	530,00			
					M 42 (PR-3S)	Z2	572706 R	710,00		
					M 54 (PR-3S)	Z2	572708 R	710,00		
					M 12 S (PR-2B)	Z8	574736 R	131,00		
					M 15 S (PR-2B)	Z8	574738 R	131,00		
					M 18 S (PR-2B)	Z8	574740 R	131,00		
					M 22 S (PR-2B)	Z8	574742 R	131,00		
					M 28 S (PR-2B)	Z8	574744 R	131,00		
					M 35 S (PR-2B)	Z8	574746 R	144,00		
				Seppelfricke	> Aalberts integrated piping systems					
				SESTA	TH 14*	570455	196,00			
				SESTA GAS	TH 16*	570460	196,00			
					TH 20*	570470	196,00			
					TH 26*	570475	196,00			
					TH 32	570480	196,00			

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
SESTA Sistema multistrato	H 16*		570320	177,00	
	H 20*		570350	177,00	
	TH 14*		570455	196,00	
	TH 16*		570460	196,00	
	TH 18*		570465	196,00	
	TH 20*		570470	196,00	
	TH 26*		570475	196,00	
	TH 32		570480	196,00	
	TH 40		570485	260,00	
	TH 50 (PZ-S)		572400	680,00	
	TH 63 (PZ-S)		572405	680,00	
	U 16*		570765	184,00	
	U 20*		570775	184,00	
	U 20*		570785	184,00	
	U 20*		570795	184,00	
	U 32		570785	215,00	
	SIGMA LI Premium	TH 16*		570460	196,00
TH 20*			570470	196,00	
TH 25*			570495	196,00	
TH 32			570480	196,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
TH 25 S (PR-2B)**		Z8	574792 R	131,00	
TH 32 S (PR-2B)		Z8	574798 R	144,00	
U 16*			570765	184,00	
U 20*			570775	184,00	
U 25*			570780	184,00	
U 32			570785	215,00	
SLOVARM PEX-THERM	U 16*		570765	184,00	
	U 20*		570775	184,00	
	H 26*		570370	177,00	
	U 32		570785	215,00	
	H 16*		570320	177,00	
	H 20*		570350	177,00	
	H 26*		570370	177,00	
	H 32		570380	177,00	
	STANDARD HIDRAULICA MultiStandard	H 16*		570320	177,00
		H 20*		570350	177,00
H 25*			570360	177,00	
H 32			570380	177,00	
RFz 16*			571325	204,00	
RFz 20*			571330	204,00	
RFz 25			571335	204,00	
RFz 32			571340	204,00	
TH 16*			570460	196,00	
TH 20*			570470	196,00	
TH 25*			570495	196,00	
TH 32			570480	196,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
TH 25 S (PR-2B)**		Z8	574792 R	131,00	
TH 32 S (PR-2B)		Z8	574798 R	144,00	
U 16*			570765	184,00	
U 18*			570770	184,00	
U 20*			570775	184,00	
U 25*			570780	184,00	
U 32			570785	215,00	
U 40			570790	262,00	
U 50		570795	314,00		
U 63 (PR-3B)	Z4	572837 R	780,00		
U 63 (PZ-S)		572365	680,00		
steeltrade Presssystem Edelstahl Kontur M	M 15		570110	163,00	
	M 18 ¹⁾		570120	163,00	
	M 22		570130	163,00	
	M 28 ¹⁾		570140	163,00	
	M 35		570150	163,00	
	M 42 (PR-3S)		572706 R	710,00	
	M 54 (PR-3S)		572708 R	710,00	
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.220,00	
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.430,00	
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.430,00	
	M 15 S (PR-2B)	Z8	574738 R	131,00	
	M 18 S (PR-2B)	Z8	574740 R	131,00	
	M 22 S (PR-2B)	Z8	574742 R	131,00	
	M 28 S (PR-2B)	Z8	574744 R	131,00	
	M 35 S (PR-2B)	Z8	574746 R	144,00	
	STELBI Polikraft	H 16*		570320	177,00
		H 20*		570350	177,00
		H 26*		570370	177,00
		TH 16*		570460	196,00
TH 20*			570470	196,00	
TH 26*			570475	196,00	
TH 32			570480	196,00	
TH 40			570485	260,00	
TH 50 (PZ-S)			572400	680,00	
TH 63 (PZ-S)			572405	680,00	
TH 16 S (PR-2B)**		Z8	574782 R	131,00	
TH 20 S (PR-2B)**		Z8	574788 R	131,00	
TH 26 S (PR-2B)**		Z8	574794 R	131,00	
TH 32 S (PR-2B)		Z8	574798 R	144,00	
U 16*			570765	184,00	
U 20*			570775	184,00	
U 26* ¹²⁾			570750	215,00	
STELBI Stelgas		TH 16*		570460	196,00
		TH 20*		570470	196,00
	TH 26*		570475	196,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
STH Westco COPPER PRESS	M 15		570110	163,00
	M 22		570130	163,00
	M 28 ¹⁾		570140	163,00
	M 35		570150	163,00
	M 42 (PR-3S)	Z2	572706 R	710,00
	M 54 (PR-3S)	Z2	572708 R	710,00
	M 15 S (PR-2B)	Z8	574738 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00
T				
TDM BRASS Serie 1600	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	THL 32		570487	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
TH 26 S (PR-2B)**	Z8	574794 R	131,00	
U 16*		570765	184,00	
U 18*		570770	184,00	
U 20*		570775	184,00	
U 25*		570780	184,00	
U 26* ¹²⁾		570750	215,00	
U 32		570785	215,00	
TDM BRASS Serie 2600	H 16*		570320	177,00
	H 18*		570340	177,00
	H 20*		570350	177,00
	H 25*		570360	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 25*		570495	196,00
	TH 26*		570475	196,00
	THL 32		570487	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 25 S (PR-2B)**	Z8	574792 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	U 16*		570765	184,00
	U 18*		570770	184,00
U 20*		570775	184,00	
U 25*		570780	184,00	
U 26* ¹²⁾		570750	215,00	
U 32		570785	215,00	
TDM BRASS Serie 1700 gas	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	THL 32		570487	196,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
TH 26 S (PR-2B)**	Z8	574794 R	131,00	
TermaConcept TC-PRESS	Basic E01 ⁵⁾		571855	321,00
THERMOLUTZ	H 14*		570310	177,00
	H 16*		570320	177,00
	TH 20*		570470	196,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
TE-SA TE-SA press serie 800	TH 14*		570455	196,00
	TH 16*		570460	196,00
	TH 18*		570465	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	TH 40		570485	260,00
	TH 50 (PZ-S)		572400	680,00
	TH 63 (PZ-S)		572405	680,00
	TH 14 S (PR-2B)**	Z8	574778 R	131,00
	TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	TH 32 S (PR-2B)	Z8	574798 R	144,00
THERMACOME ACOPEX ALU	H 16*		570320	177,00
	H 20*		570350	177,00
	H 26*		570370	177,00
	H 32		570380	177,00
	TH 16*		570460	196,00
	TH 20*		570470	196,00
	TH 26*		570475	196,00
	TH 32		570480	196,00
	U 16*		570765	184,00
	U 20*		570775	184,00
U 32		570785	215,00	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€		
TIEMME 1650 AL-COBRAPEX	TH 14*		570455	196,00	TRA MULTITRAPRESS	U 16*		570765	184,00		
	TH 16*		570460	196,00		U 18*		570770	184,00		
	TH 18*		570465	196,00		U 20*		570775	184,00		
	TH 20*		570470	196,00		U 25*		570780	184,00		
	TH 25*		570495	196,00		U 32		570785	215,00		
	TH 26*		570475	196,00		U 40		570790	262,00		
	THL 32		570487	196,00		U 50		570795	314,00		
	TH 40		570485	260,00		U 63 (PR-3B)	Z4	572837 R	780,00		
	TH 50 (PZ-S)		572400	680,00		U 63 (PZ-S)		572365	680,00		
	TH 63 (PZ-S)		572405	680,00		TRA TRAPRESS	H 12*		570300	177,00	
	THz 75 (PR-3B)	Z4	572829 R	640,00			H 16*		570320	177,00	
	TH 14 S (PR-2B)**	Z8	574778 R	131,00			H 20*		570350	177,00	
	TH 16 S (PR-2B)**	Z8	574782 R	131,00			H 25*		570360	177,00	
	TH 18 S (PR-2B)**	Z8	574786 R	131,00			H 32		570380	177,00	
	TH 20 S (PR-2B)**	Z8	574788 R	131,00			RFz 12*		571320	204,00	
	TH 25 S (PR-2B)**	Z8	574792 R	131,00			RFz 16*		571325	204,00	
	TH 26 S (PR-2B)**	Z8	574794 R	131,00			RFz 20*		571330	204,00	
							RFz 25		571335	204,00	
							RFz 32		571340	204,00	
	TIEMME 1700 COBRAPEX	RFz 12*		571320		204,00	Tradelink TradePex Crimp Water	K16/P18*		572600	204,00
		RFz 16*		571325		204,00		K/20*		572605	204,00
		RFz 20*		571330		204,00		K/25*		572610	204,00
RFz 25			571335	204,00	K32			572615	204,00		
RFz 32			571340	204,00	K140			572620	204,00		
TH 40			570485	260,00	K150			572625	335,00		
TH 50 (PZ-S)			572400	680,00	Tradelink TradePex Crimp Gas	K16/P18*			572600	204,00	
TH 63 (PZ-S)			572405	680,00		K/20*			572605	204,00	
						K/25*			572610	204,00	
						K32			572615	204,00	
				K140			572620	204,00			
TIEMME 1650 AL-COBRAPEX GAS	TH 16*		570460	196,00	TUBIPLAST ITALY MULTILAYER PIPE	TH 16*		570460	196,00		
	TH 20*		570470	196,00		TH 18*		570465	196,00		
	TH 26*		570475	196,00		TH 20*		570470	196,00		
	THL 32		570487	196,00		TH 26*		570475	196,00		
	TH 16 S (PR-2B)**	Z8	574782 R	131,00		TH 32		570480	196,00		
	TH 20 S (PR-2B)**	Z8	574788 R	131,00		TH 40		570485	260,00		
TH 26 S (PR-2B)**	Z8	574794 R	131,00	TH 50 (PZ-S)		572400	680,00				
TIGRE ALPEX GÁS	TH 16*		570460	196,00	TH 63 (PZ-S)		572405	680,00			
	TH 20*		570470	196,00	TH 16 S (PR-2B)**	Z8	574782 R	131,00			
	TH 26*		570475	196,00	TH 18 S (PR-2B)**	Z8	574786 R	131,00			
	TH 32		570480	196,00	TH 20 S (PR-2B)**	Z8	574788 R	131,00			
					TH 26 S (PR-2B)**	Z8	574794 R	131,00			
					TH 32 S (PR-2B)	Z8	574798 R	144,00			
TKM Systemtechnik	TH 14*		570455	196,00	TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	H 16*		570320	177,00		
	TH 16*		570460	196,00		H 18*		570340	177,00		
	TH 20*		570470	196,00		H 20*		570350	177,00		
	TH 26*		570475	196,00		H 26*		570370	177,00		
	TH 32		570480	196,00		H 32		570380	177,00		
	TH 40		570485	260,00		U 16*		570765	184,00		
	TH 50 (PZ-S)		572400	680,00		U 18*		570770	184,00		
	TH 63 (PZ-S)		572405	680,00		U 20*		570775	184,00		
						U 26 ¹²⁾		570750	215,00		
						U 32		570785	215,00		
						TH 16*		570460	196,00		
TRA Multi TRA+	H 16*		570320	177,00	TH 18*		570465	196,00			
	H 20*		570350	177,00	TH 20*		570470	196,00			
	H 25*		570360	177,00	TH 26*		570475	196,00			
	H 26*		570370	177,00	TH 32		570480	196,00			
	H 32		570380	177,00	TH 40		570485	260,00			
	H 40 (PZ-46)		570390	600,00	TH 50 (PZ-S)		572400	680,00			
	TH 16*		570460	196,00	TH 63 (PZ-S)		572405	680,00			
	TH 20*		570470	196,00	THz 75 (PR-3B)	Z4	572829 R	640,00			
	TH 25*		570495	196,00	TH 16 S (PR-2B)**	Z8	574782 R	131,00			
	TH 26*		570475	196,00	TH 18 S (PR-2B)**	Z8	574786 R	131,00			
	TH 32		570480	196,00	TH 20 S (PR-2B)**	Z8	574788 R	131,00			
	TH 40		570485	260,00	TH 25 S (PR-2B)**	Z8	574792 R	131,00			
	TH 50 (PZ-S)		572400	680,00	TH 26 S (PR-2B)**	Z8	574794 R	131,00			
	TH 63 (PZ-S)		572405	680,00	TH 32 S (PR-2B)	Z8	574798 R	144,00			
	U 16*		570765	184,00	TWEETOP	U 16*		570765	184,00		
	U 20*		570775	184,00		U 20*		570775	184,00		
	U 25*		570780	184,00		U 25*		570780	184,00		
	U 26 ¹²⁾		570750	215,00		U 32		570785	215,00		
	U 32		570785	215,00		U 40		570790	262,00		
	U 40		570790	262,00		U 50		570795	314,00		
	U 50		570795	314,00		U 63 (PR-3B)	Z4	572837 R	780,00		
	U 63 (PR-3B)	Z4	572837 R	780,00		U 63 (PZ-S)		572365	680,00		
	U 63 (PZ-S)		572365	680,00		U 75 (PR-3B)	Z4	572828 R	680,00		
	U 75 (PR-3B)	Z4	572828 R	680,00							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€		
Viega MegaPress 304 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	226,00	Viega Profipress	V 12		570107	163,00		
	VMPz ¾" (OD 26,9 mm)		571764	226,00		VG 14		570132	163,00		
	VMPz 1" (OD 33,7 mm)		571767	226,00		V 15		570115	163,00		
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00		VG 16		570137	163,00		
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	510,00		V 18		570125	163,00		
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	510,00		V 22		570135	163,00		
Viega MegaPress 316 (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	226,00		V 28		570145	163,00		
	VMPz ¾" (OD 26,9 mm)		571764	226,00		V 35		570155	163,00		
	VMPz 1" (OD 33,7 mm)		571767	226,00		V 42		570165	379,00		
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00		V 42 (PR-2B)	22	572850 R	339,00		
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	510,00		V 54		570175	390,00		
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	510,00		V 54 (PR-2B)	22	572851 R	367,00		
Viega MegaPress 316 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	226,00		VFz 64,0 (PR-3B) ⁶⁾	25	572815 R	640,00		
	VMPz ¾" (OD 26,9 mm)		571764	226,00		VFz 66,7 (PR-3B)	25	572846 R	640,00		
	VMPz 1" (OD 33,7 mm)		571767	226,00		VFz 76,1 (PR-3B) ⁶⁾	25	572816 R	640,00		
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00		VFz 88,9 (PR-3B) ⁶⁾	25	572817 R	680,00		
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	510,00		VFz 108,0 (PR-3B) ⁶⁾	25	572818 R	680,00		
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	510,00		V 12 S (PR-2B)	28	574748 R	131,00		
Viega MegaPress CuNi (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	226,00		VG 14 S (PR-2B)	28	574750 R	131,00		
	VMPz ¾" (OD 26,9 mm)		571764	226,00		V 15 S (PR-2B)	28	574752 R	131,00		
	VMPz 1" (OD 33,7 mm)		571767	226,00		VG 16 S (PR-2B)	28	574754 R	131,00		
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00		V 18 S (PR-2B)	28	574756 R	131,00		
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	510,00		V 22 S (PR-2B)	28	574758 R	131,00		
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	510,00		V 28 S (PR-2B)	28	574760 R	131,00		
Viega MegaPress FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	226,00		V 35 S (PR-2B)	28	574762 R	144,00		
	VMPz ¾" (OD 26,9 mm)		571764	226,00		Viega Profipress G	V 12		570107	163,00	
	VMPz 1" (OD 33,7 mm)		571767	226,00			VG 14		570132	163,00	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00			V 15		570115	163,00	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	510,00			VG 16		570137	163,00	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	510,00			V 18		570125	163,00	
Viega Megapress (EN) ⁹⁾	VMP ¾" (OD 17,2 mm)		571740	226,00	V 22			570135	163,00		
	VMP ½" G (OD 21,3 mm)		571766 R	226,00	V 28			570145	163,00		
	VMPz ¾" (OD 26,9 mm)		571764	226,00	V 35			570155	163,00		
	VMPz 1" (OD 33,7 mm)		571767	226,00	V 42			570165	379,00		
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00	V 42 (PR-2B)		22	572850 R	339,00		
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	510,00	V 54			570175	390,00		
Viega Megapress S (EN) ⁹⁾	VMP ¾" (OD 17,2 mm)		571740	226,00	V 54 (PR-2B)		22	572851 R	367,00		
	VMP ½" G (OD 21,3 mm)		571766 R	226,00	VFz 64,0 (PR-3B) ⁶⁾		25	572815 R	640,00		
	VMPz ¾" (OD 26,9 mm)		571764	226,00	V 12 S (PR-2B)		28	574748 R	131,00		
	VMPz 1" (OD 33,7 mm)		571767	226,00	V 15 S (PR-2B)		28	574752 R	131,00		
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	740,00	VG 16 S (PR-2B)		28	574754 R	131,00		
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	510,00	V 18 S (PR-2B)		28	574756 R	131,00		
Viega Megapress S XL (EN) ⁹⁾	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	510,00	V 22 S (PR-2B)		28	574758 R	131,00		
	VMPz 2½" XL (PR-3B) EN (OD 76,1 mm)	27 XL 45 kN ⁴⁾	579112 R	640,00	V 28 S (PR-2B)		28	574760 R	131,00		
	VMPz 3" XL (PR-3B) (OD 88,9 mm)	27 XL 45 kN ⁴⁾	579113 R	640,00	V 35 S (PR-2B)		28	574762 R	144,00		
	VMPz 4" XL (PR-3B) (OD 114,3 mm)	27 XL 45 kN ⁴⁾	579114 R	680,00	Viega Profipress S		V 12		570107	163,00	
	Viega Pexfit	VX 16*		571635			226,00	V 15		570115	163,00
		VX 20*		571640			226,00	V 18		570125	163,00
VX 25*			571645	226,00			V 22		570135	163,00	
Viega Pexfit G		VX 16*		571635			226,00	V 28		570145	163,00
		VX 20*		571640			226,00	V 35		570155	163,00
		VX 25*		571645	226,00		V 12 S (PR-2B)	28	574748 R	131,00	
	Viega Prestabo	V 12		570107	163,00		V 15 S (PR-2B)	28	574752 R	131,00	
		V 15		570115	163,00		V 18 S (PR-2B)	28	574756 R	131,00	
		V 18		570125	163,00		V 22 S (PR-2B)	28	574758 R	131,00	
V 22			570135	163,00	V 28 S (PR-2B)	28	574760 R	131,00			
V 28			570145	163,00	V 35 S (PR-2B)	28	574762 R	144,00			
V 35			570155	163,00	Viega Profipress Therm	V 12		570107	163,00		
V 42		570165	379,00	V 15			570115	163,00			
V 42 (PR-2B)	22	572850 R	339,00	V 18			570125	163,00			
V 54		570175	390,00	V 22			570135	163,00			
V 54 (PR-2B)	22	572851 R	367,00	V 12 S (PR-2B)		28	574748 R	131,00			
VFz 64,0 (PR-3B) ⁶⁾	25	572815 R	640,00	V 15 S (PR-2B)		28	574752 R	131,00			
VFz 76,1 (PR-3B) ⁶⁾	25	572816 R	640,00	V 18 S (PR-2B)	28	574756 R	131,00				
VFz 88,9 (PR-3B) ⁶⁾	25	572817 R	680,00	V 22 S (PR-2B)	28	574758 R	131,00				
VFz 108,0 (PR-3B) ⁶⁾	25	572818 R	680,00	Viega ProPress (ASTM) ¹⁰⁾	VUS ½" (OD 15,9 mm)		571770	197,00			
V 12 S (PR-2B)	28	574748 R	131,00		VUS ¾" (OD 22,2 mm)		571775	197,00			
V 15 S (PR-2B)	28	574752 R	131,00		VUS 1" (OD 28,6 mm)		571780	197,00			
V 18 S (PR-2B)	28	574756 R	131,00		VUS 1¼" (OD 34,9 mm)		571785	197,00			
V 22 S (PR-2B)	28	574758 R	131,00		VUS 1½" (OD 41,3 mm)		571790	379,00			
V 28 S (PR-2B)	28	574760 R	131,00		VUS 2" (OD 54,0 mm)		571795	390,00			
V 35 S (PR-2B)	28	574762 R	144,00	XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	25	572819 R	640,00			
				XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	25	572820 R	640,00			
				XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	25	572821 R	680,00			

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
WEECON	M 15		570110	163,00					
PRESS-C-Stahl	M 18		570120	163,00					
	M 22		570130	163,00					
	M 28		570140	163,00					
	M 35		570150	163,00					
	M 42 (PZ-4G)		570160	530,00					
	M 54 (PZ-4G)		570170	530,00					
	M 42 (PR-3S)	Z2	572706 R	710,00					
	M 54 (PR-3S)	Z2	572708 R	710,00					
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.220,00	XtraConnect	F 16*		570717	187,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.430,00		F 20*		570727	187,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.430,00		F 26*		570730	202,00
	M 15 S (PR-2B)	Z8	574738 R	131,00		F 32		570735	202,00
	M 18 S (PR-2B)	Z8	574740 R	131,00		F 16 S (PR-2B)**	Z8	574728 R	131,00
	M 22 S (PR-2B)	Z8	574742 R	131,00		F 20 S (PR-2B)**	Z8	574730 R	131,00
	M 28 S (PR-2B)	Z8	574744 R	131,00		F 26 S (PR-2B)**	Z8	574732 R	131,00
	M 35 S (PR-2B)	Z8	574746 R	144,00		F 32 S (PR-2B)	Z8	574734 R	144,00
						H 16*		570320	177,00
WEECON	M 15		570110	163,00		H 20*		570350	177,00
PRESS-Edelstahl	M 18		570120	163,00		H 26*		570370	177,00
	M 22		570130	163,00		H 32		570380	177,00
	M 28		570140	163,00		TH 16*		570460	196,00
	M 35		570150	163,00		TH 20*		570470	196,00
	M 42 (PZ-4G)		570160	530,00		TH 26*		570475	196,00
	M 54 (PZ-4G)		570170	530,00		TH 32		570480	196,00
	M 42 (PR-3S)	Z2	572706 R	710,00		TH 16 S (PR-2B)**	Z8	574782 R	131,00
	M 54 (PR-3S)	Z2	572708 R	710,00		TH 20 S (PR-2B)**	Z8	574788 R	131,00
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.220,00	(DN 26)	TH 26 S (PR-2B)**	Z8	574794 R	131,00
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.430,00		TH 32 S (PR-2B)	Z8	574798 R	144,00
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.430,00		U 16*		570765	184,00
	M 15 S (PR-2B)	Z8	574738 R	131,00		U 20*		570775	184,00
	M 18 S (PR-2B)	Z8	574740 R	131,00		U 25*		570780	184,00
	M 22 S (PR-2B)	Z8	574742 R	131,00		U 32		570785	215,00
	M 28 S (PR-2B)	Z8	574744 R	131,00		VP 16*		570910	196,00
	M 35 S (PR-2B)	Z8	574746 R	144,00		VP 20*		570915	196,00
						VP 32		570925	216,00
WEECON	V 15		570115	163,00					
PRESS-Kupfer	V 18		570125	163,00					
	V 22		570135	163,00					
	V 28		570145	163,00					
	V 35		570155	163,00					
	V 42		570165	379,00					
	V 42 (PR-2B)	Z2	572850 R	339,00					
	V 54		570175	390,00					
	V 54 (PR-2B)	Z2	572851 R	367,00					
	V 15 S (PR-2B)	Z8	574752 R	131,00	ZEWOTHERM	TH 12*		570452	196,00
	V 18 S (PR-2B)	Z8	574756 R	131,00	Zewo Press Premium	TH 16*		570460	196,00
	V 22 S (PR-2B)	Z8	574758 R	131,00		TH 17*		570462	196,00
	V 28 S (PR-2B)	Z8	574760 R	131,00		TH 18*		570465	196,00
	V 35 S (PR-2B)	Z8	574762 R	144,00		TH 20*		570470	196,00
WEM	U 16*		570765	184,00		TH 26*		570475	196,00
WIELAND-WERKE	TH 14 ²⁾		570455	196,00		TH 32		570480	196,00
cuprotherm CTX ²⁾	TH 16 ²⁾		570460	196,00		TH 50 (PZ-S)		572400	680,00
WKS-Press	TH 14*		570455	196,00		TH 63 (PZ-S)		572405	680,00
	TH 16*		570460	196,00		TH 12 S (PR-2B)**	Z8	574776 R	131,00
	TH 17*		570462	196,00		TH 16 S (PR-2B)**	Z8	574782 R	131,00
	TH 20*		570470	196,00		TH 17 S (PR-2B)**	Z8	574784 R	131,00
	TH 26*		570475	196,00		TH 18 S (PR-2B)**	Z8	574786 R	131,00
	TH 32		570480	196,00		TH 20 S (PR-2B)**	Z8	574788 R	131,00
	TH 40		570485	260,00		TH 26 S (PR-2B)**	Z8	574794 R	131,00
WÜRTH	TH 16*		570460	196,00		TH 32 S (PR-2B)	Z8	574798 R	144,00
Würth	TH 20*		570470	196,00	ZEWOTHERM	TH 16*		570460	196,00
	TH 26*		570475	196,00	Zewo Press PPSU	TH 20*		570470	196,00
	HE 32		571900	235,00		TH 26*		570475	196,00
	HEz 40		571904	340,00		TH 32		570480	196,00
						TH 16 S (PR-2B)**	Z8	574782 R	131,00
						TH 20 S (PR-2B)**	Z8	574788 R	131,00
						TH 26 S (PR-2B)**	Z8	574794 R	131,00
						TH 32 S (PR-2B)	Z8	574798 R	144,00
					ZURN	US ¾**		571450	223,00
					INDUSTRIES	US ½**		571455	223,00
					ZURN PEX	US ¾**		571460	223,00
						US 1**		571465	223,00
						US 1 ¼**		571470	223,00
						US 1 ½*		571475	223,00
						US 2*		571477	300,00

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

For REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

Description	Art.-No.	€
Adapter tongs Z8 for driving REMS pressing rings S (PR-2B)	574702R	152,00
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795R	152,00
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801RX	326,00
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802RX	326,00
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120R	393,00
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22V ACC	579123R	415,00
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1½")/cropping tongs and compartment for pipe cutter up to 42 mm	570295R	102,00
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40 A, VUS 1½", VUS 2")	570290R	102,00
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810R	102,00
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/VUSFz 2½–4" (PR-3B) or for adapter tongs Z5 and 1 pressing tong VMPz 1½ (PZ-S) and 2 pressing rings VMPz 1½–2" (PR-3B)	572809R	116,00
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516R	102,00
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704R	154,00
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings S (PR-2B)	571136R	154,00
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137R	154,00
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603R	261,00
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813R	57,80

