

for all common pressfitting systems

**Select REMS pressing tongs/
REMS pressing rings yourself!**

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 238) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press (page 185) using the adapter tong Z8.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (Patent EP 2 027 971).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Adapter tongs required, see page 238.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 238. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing ring (PR-2B)

REMS pressing ring (PR-2B) with 2 pressing jaws, for secure engagement of the pressing jaws in tight spaces, for midsize dimensions. Adapter tongs required for driving the REMS (PR-2B) pressing rings, see page 238.

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 238.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Confirmation of suitability

See page 239.

Hold-Harmless and Indemnification Agreement


See page 240.



German Quality Product



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)



REMS pressing rings (PR-2B)




REMS pressing ring S (PR-2B), continuously swivellable



REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

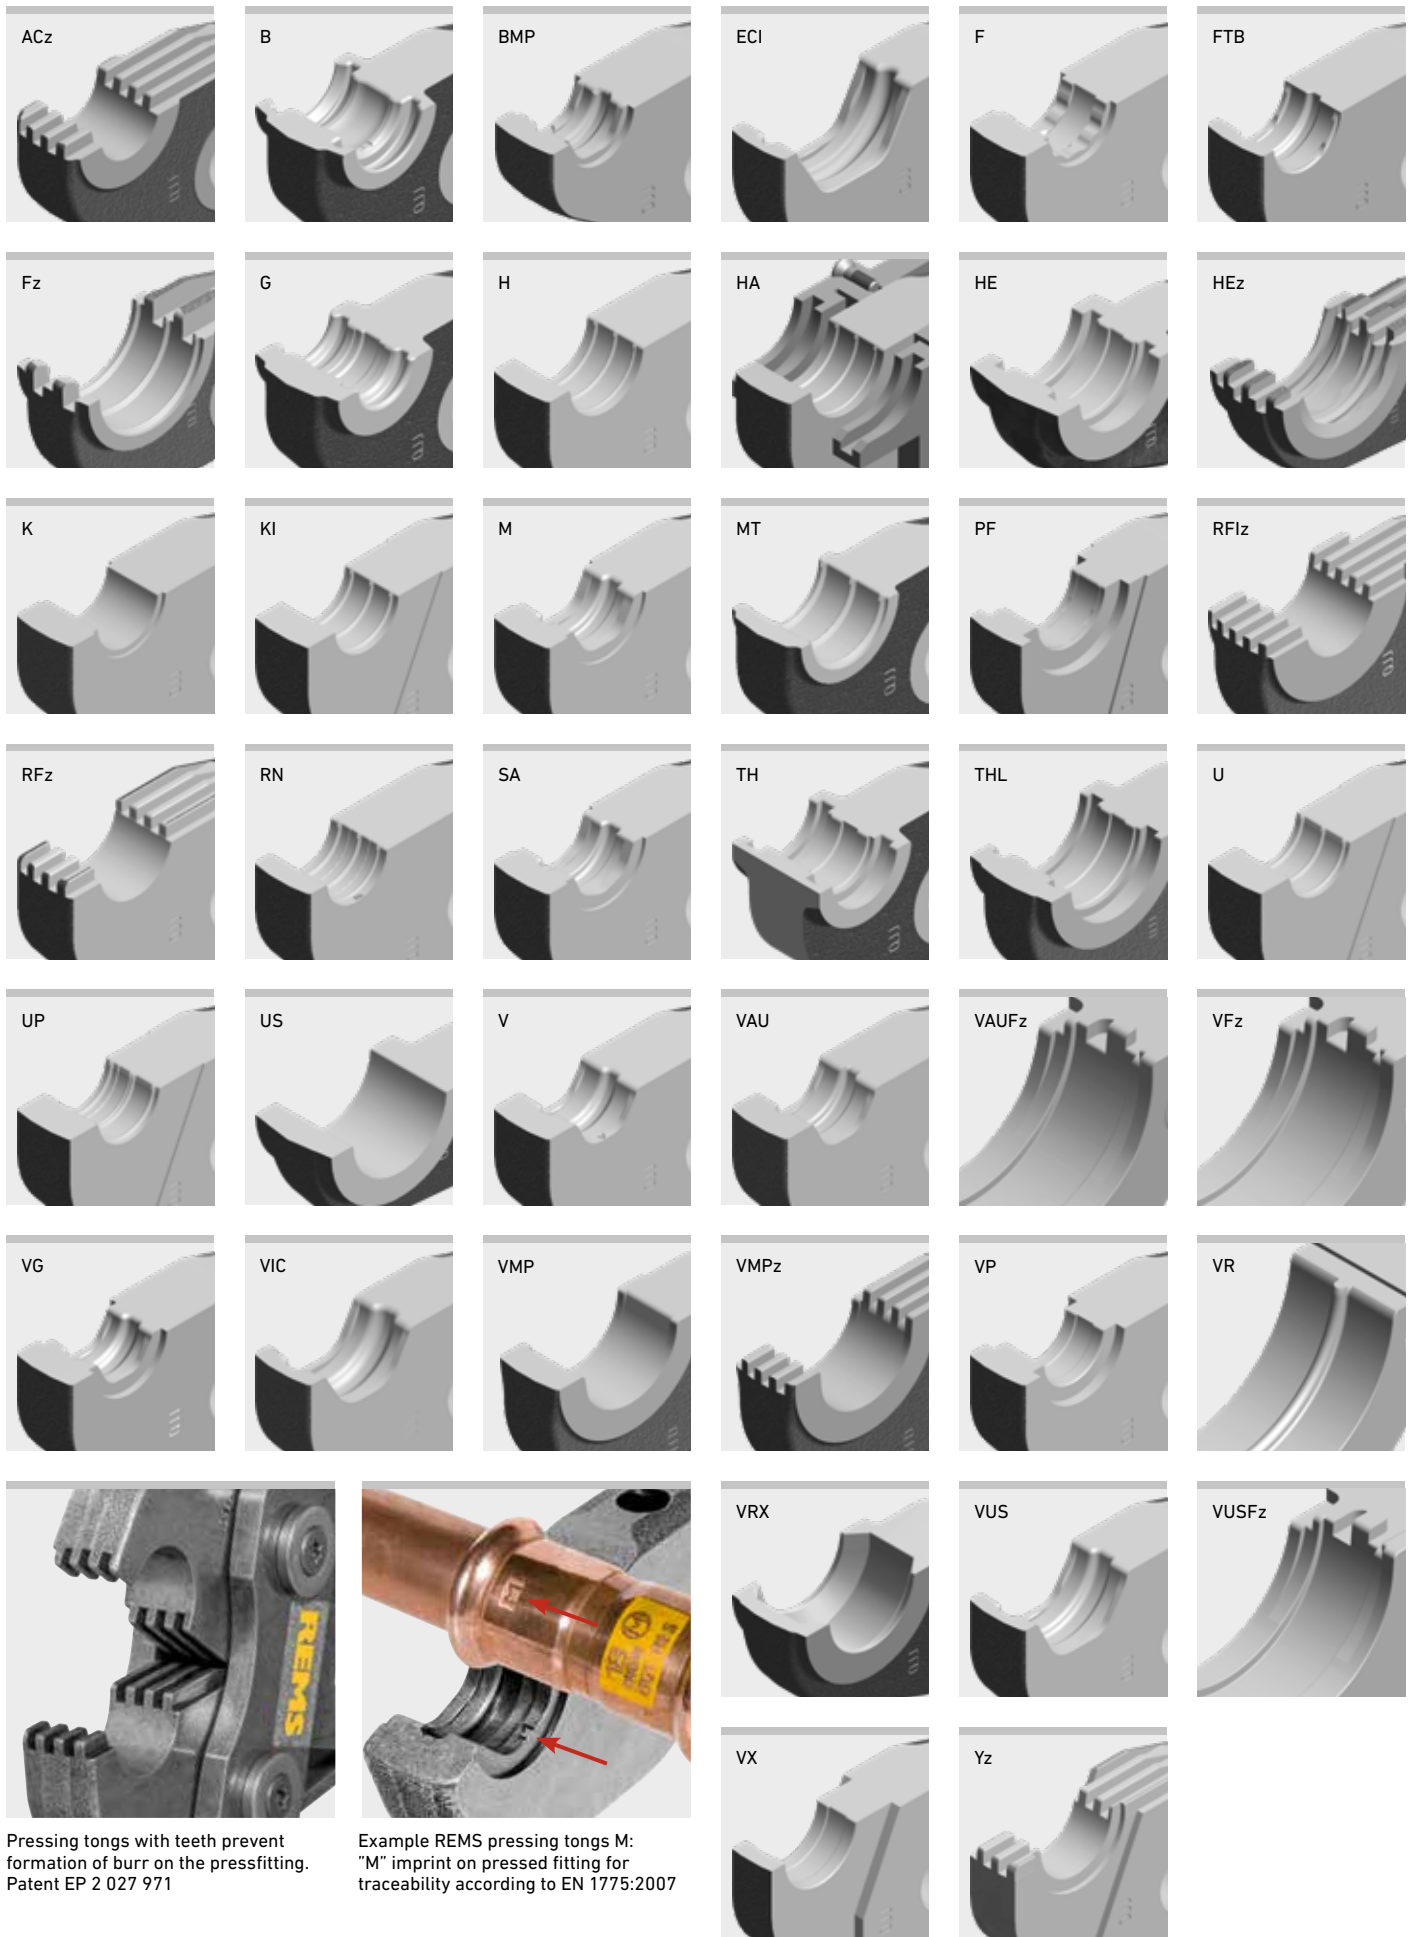

Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs M: "M" imprint on pressed fitting for traceability according to EN 1775:2007

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
A				
Aalberts integrated piping systems VSH MultiPress	U 14*		570760	174,33
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	TH 14*		570455	186,32
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	Aalberts integrated piping systems VSH MultiPress Gas ²⁾	U 16 ²⁾		570765
U 20 ²⁾			570775	174,33
U 25 ²⁾			570780	174,33
TH 16 ²⁾			570460	186,32
TH 20 ²⁾			570470	186,32
TH 16 S (PR-2B) ²⁾		Z8	574782 R	124,51
TH 20 S (PR-2B) ²⁾		Z8	574788 R	124,51
Aalberts integrated piping systems VSH SudoPress Carbon		V 12		570107
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
V 18 S (PR-2B)	Z8	574756 R	124,51	
V 22 S (PR-2B)	Z8	574758 R	124,51	
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
Aalberts integrated piping systems VSH SudoPress Copper	V 12		570107	154,61
	V 14		570112	154,61
	VG 14		570132	154,61
	V 15		570115	154,61
	V 16		570117	154,61
	VG 16		570137	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 14 S (PR-2B)	Z8	574800 R	124,51
VG 14 S (PR-2B)	Z8	574750 R	124,51	
V 15 S (PR-2B)	Z8	574752 R	124,51	
VG 16 S (PR-2B)	Z8	574754 R	124,51	
V 16 S (PR-2B)	Z8	574802 R	124,51	
V 18 S (PR-2B)	Z8	574756 R	124,51	
V 22 S (PR-2B)	Z8	574758 R	124,51	
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
Aalberts integrated piping systems VSH SudoPress Copper Gas	V 12		570107	154,61
	V 14		570112	154,61
	VG 14		570132	154,61
	V 15		570115	154,61
	V 16		570117	154,61
	VG 16		570137	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 14 S (PR-2B)	Z8	574800 R	124,51
VG 14 S (PR-2B)	Z8	574750 R	124,51	
V 15 S (PR-2B)	Z8	574752 R	124,51	
VG 16 S (PR-2B)	Z8	574754 R	124,51	
V 16 S (PR-2B)	Z8	574802 R	124,51	
V 18 S (PR-2B)	Z8	574756 R	124,51	
V 22 S (PR-2B)	Z8	574758 R	124,51	
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Aalberts integrated piping systems VSH SuoPress Stainless	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	V 15 S (PR-2B)	Z8	574752 R	124,51
V 18 S (PR-2B)	Z8	574756 R	124,51	
V 22 S (PR-2B)	Z8	574758 R	124,51	
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
Aalberts integrated piping systems VSH XPress Carbon	M 12		570100	154,61
	M 15		570110	154,61
	M 18 ¹⁾		570120	154,61
	M 22		570130	154,61
	M 28 ¹⁾		570140	154,61
	M 35		570150	154,61
	M 42 (PZ-46)		570160	498,19
	M 54 (PZ-46)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 12 S (PR-2B)	Z8	574736 R	124,51	
M 15 S (PR-2B)	Z8	574738 R	124,51	
M 18 S (PR-2B)	Z8	574740 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51	
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
Aalberts integrated piping systems VSH XPress Copper	M 12		570100	154,61
	M 15		570110	154,61
	M 18 ¹⁾		570120	154,61
	M 22		570130	154,61
	M 28 ¹⁾		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109 R	1.355,58
M 12 S (PR-2B)	Z8	574736 R	124,51	
M 15 S (PR-2B)	Z8	574738 R	124,51	
M 18 S (PR-2B)	Z8	574740 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51	
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
Aalberts integrated piping systems VSH XPress Copper Gas	M 15		570110	154,61
	M 18 ¹⁾		570120	154,61
	M 22		570130	154,61
	M 28 ¹⁾		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
	Aalberts integrated piping systems VSH XPress Stainless	M 15		570110
M 18 ¹⁾			570120	154,61
M 22			570130	154,61
M 28 ¹⁾			570140	154,61
M 35			570150	154,61
M 42 (PZ-46)			570160	498,19
M 54 (PZ-46)			570170	498,19
M 42 (PR-3S)		Z2	572706 R	672,57
M 54 (PR-3S)		Z2	572708 R	672,57
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
M 15 S (PR-2B)		Z8	574738 R	124,51
M 18 S (PR-2B)	Z8	574740 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51	
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
Aalberts integrated piping systems VSH XPress Stainless Gas	M 15		570110	154,61
	M 18 ¹⁾		570120	154,61
	M 22		570130	154,61
	M 28 ¹⁾		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
AC-FIX PRESS (Global Piping Systems)	H 12*		570300	168,10	AHLSELL A-press elförzinkad V	V 12		570107	154,61
	H 16*		570320	168,10		V 15		570115	154,61
	H 20*		570350	168,10		V 18		570125	154,61
	H 25*		570360	168,10		V 22		570135	154,61
	H 32		570380	168,10		V 28		570145	154,61
	RFz 12*		571320	194,05		V 35		570155	154,61
	RFz 16*		571325	194,05		V 42		570165	360,13
	RFz 20*		571330	194,05		V 54		570175	370,51
	RFz 25		571335	194,05		V 12 S (PR-2B)	Z8	574748 R	124,51
	RFz 32		571340	194,05		V 15 S (PR-2B)	Z8	574752 R	124,51
	U 16*		570765	174,33		V 18 S (PR-2B)	Z8	574756 R	124,51
	U 20*		570775	174,33		V 22 S (PR-2B)	Z8	574758 R	124,51
	U 25*		570780	174,33		V 28 S (PR-2B)	Z8	574760 R	124,51
	U 32		570785	204,43		V 35 S (PR-2B)	Z8	574762 R	136,96
	VX 16*		571635	214,81		AHLSELL	M 12	570100	154,61
	VX 20*		571640	214,81		A-press koppar M	M 15	570110	154,61
							M 18	570120	154,61
							M 22	570130	154,61
							M 28	570140	154,61
							M 35	570150	154,61
							M 42 (PR-3S)	Z2	572706 R
					M 54 (PR-3S)	Z2	572708 R	672,57	
					M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
					M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
					M 15 S (PR-2B)	Z8	574738 R	124,51	
					M 18 S (PR-2B)	Z8	574740 R	124,51	
					M 22 S (PR-2B)	Z8	574742 R	124,51	
					M 28 S (PR-2B)	Z8	574744 R	124,51	
					M 35 S (PR-2B)	Z8	574746 R	136,96	
					AHLSELL	V 12	570107	154,61	
					A-press koppar V	V 15	570115	154,61	
						V 18	570125	154,61	
						V 22	570135	154,61	
						V 28	570145	154,61	
						V 35	570155	154,61	
						V 42	570165	360,13	
						V 54	570175	370,51	
						V 12 S (PR-2B)	Z8	574748 R	124,51
						V 15 S (PR-2B)	Z8	574752 R	124,51
						V 18 S (PR-2B)	Z8	574756 R	124,51
						V 22 S (PR-2B)	Z8	574758 R	124,51
						V 28 S (PR-2B)	Z8	574760 R	124,51
						V 35 S (PR-2B)	Z8	574762 R	136,96
					AHLSELL	M 15	570110	154,61	
					A-press rostfritt	M 18	570120	154,61	
						M 22	570130	154,61	
						M 28	570140	154,61	
						M 35	570150	154,61	
						M 42 (PR-3S)	Z2	572706 R	672,57
						M 54 (PR-3S)	Z2	572708 R	672,57
						M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
						M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
						M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
						M 15 S (PR-2B)	Z8	574738 R	124,51
						M 18 S (PR-2B)	Z8	574740 R	124,51
						M 22 S (PR-2B)	Z8	574742 R	124,51
						M 28 S (PR-2B)	Z8	574744 R	124,51
						M 35 S (PR-2B)	Z8	574746 R	136,96
					AHLSELL	M 12	570100	154,61	
					A-press	M 15	570110	154,61	
					elförzinkad M	M 18	570120	154,61	
						M 22	570130	154,61	
						M 28	570140	154,61	
						M 35	570150	154,61	
						M 42 (PR-3S)	Z2	572706 R	672,57
						M 54 (PR-3S)	Z2	572708 R	672,57
						M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
						M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
						M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
						M 12 S (PR-2B)	Z8	574736 R	124,51
						M 15 S (PR-2B)	Z8	574738 R	124,51
						M 18 S (PR-2B)	Z8	574740 R	124,51
						M 22 S (PR-2B)	Z8	574742 R	124,51
						M 28 S (PR-2B)	Z8	574744 R	124,51
						M 35 S (PR-2B)	Z8	574746 R	136,96
					AIRBEL PRESSCLIM	M 15	570110	154,61	
						M 18	570120	154,61	
						M 22	570130	154,61	
						M 28	570140	154,61	
						M 35	570150	154,61	
						M 42 (PR-3S)	Z2	572706 R	672,57
						M 54 (PR-3S)	Z2	572708 R	672,57
						M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
						M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
						M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
						M 15 S (PR-2B)	Z8	574738 R	124,51
						M 18 S (PR-2B)	Z8	574740 R	124,51
						M 22 S (PR-2B)	Z8	574742 R	124,51
						M 28 S (PR-2B)	Z8	574744 R	124,51
						M 35 S (PR-2B)	Z8	574746 R	136,96

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
AIRBEL	M 15		570110	154,61
SERTINOX	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
ALB	TH 16*		570460	186,32
Sistema Multicapa para calefacción y sanitario	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 26* ¹²⁾		570750	204,43
	U 32		570785	204,43
	U 40		570790	249,07
ALB	TH 16*		570460	186,32
Sistema Multicapa para Gas	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 26* ¹²⁾		570750	204,43
	U 32		570785	204,43
ALTECH Altech	Rfz 12*		571320	194,05
	Rfz 16*		571325	194,05
	Rfz 20*		571330	194,05
	Rfz 25		571335	194,05
APE MULTYGAS Serie AP Gas	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
APE Serie AP	B 16*		570850	203,40
	B 20*		570860	203,40
	B 26		570870	224,16
	B 32		570880	224,16
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
APE Serie APL	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
AQUATECHNIK Press-fitting metal	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 26* ¹²⁾		570750	204,43
	U 32		570785	204,43
AQUATECHNIK Universal	B 16*		570850	203,40
	B 20*		570860	203,40
	B 26		570870	224,16
	B 32		570880	224,16
	F 16*		570717	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 26* ¹²⁾		570750	204,43
	U 32		570785	204,43
ARKA DUROsystem	H 16*		570320	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
Aschl NIR	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
ASSOTHERM IPC-RAC Carbon Steel	M 15		570110	154,61	ASSOTHERM IPR-RRR Copper	M 15		570110	154,61
	M 18		570120	154,61		M 18		570120	154,61
	M 22		570130	154,61		M 22		570130	154,61
	M 28		570140	154,61		M 28		570140	154,61
	M 35		570150	154,61		M 35		570150	154,61
	M 42 (PZ-4G)		570160	498,19		M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19		M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57		M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57		M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51		M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51		M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51		M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51		M 28 S (PR-2B)	Z8	574744 R	124,51
M 35 S (PR-2B)	Z8	574746 R	136,96	M 35 S (PR-2B)	Z8	574746 R	136,96		
ASSOTHERM IPI-RAX Inox	M 15		570110	154,61	ASSOTHERM IPR-RRR Copper Gas	M 15		570110	154,61
	M 18		570120	154,61		M 18		570120	154,61
	M 22		570130	154,61		M 22		570130	154,61
	M 28		570140	154,61		M 28		570140	154,61
	M 35		570150	154,61		M 35		570150	154,61
	M 42 (PZ-4G)		570160	498,19		M 15 S (PR-2B)	Z8	574738 R	124,51
	M 54 (PZ-4G)		570170	498,19		M 18 S (PR-2B)	Z8	574740 R	124,51
	M 42 (PR-3S)	Z2	572706 R	672,57		M 22 S (PR-2B)	Z8	574742 R	124,51
	M 54 (PR-3S)	Z2	572708 R	672,57		M 28 S (PR-2B)	Z8	574744 R	124,51
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47		M 35 S (PR-2B)	Z8	574746 R	136,96
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58		ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8"	571450	211,70
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58			US 1/2"	571455	211,70
	M 15 S (PR-2B)	Z8	574738 R	124,51			US 3/4"	571460	211,70
	M 18 S (PR-2B)	Z8	574740 R	124,51			US 1"	571465	211,70
	M 22 S (PR-2B)	Z8	574742 R	124,51			US 1 1/4"	571470	211,70
	M 28 S (PR-2B)	Z8	574744 R	124,51			US 1 1/2"	571475	211,70
M 35 S (PR-2B)	Z8	574746 R	136,96		US 2"	571477	285,40		
ASSOTHERM IPI-RAX Inox Gas	M 15		570110	154,61	ATUSA ITALIA	M 15		570110	154,61
	M 18		570120	154,61	INSTALPRESS	M 18		570120	154,61
	M 22		570130	154,61	CARBON STEEL	M 22		570130	154,61
	M 28		570140	154,61	PRESS FITTINGS	M 28		570140	154,61
	M 35		570150	154,61		M 35		570150	154,61
	M 42 (PZ-4G)		570160	498,19	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PZ-4G)		570170	498,19	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 42 (PR-3S)	Z2	572706 R	672,57	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47	
	M 54 (PR-3S)	Z2	572708 R	672,57	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58	
	M 76,1 XL (PR-3S)	Z7 XL 45kN ⁴⁾	579101 R	1.161,47	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58	
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45kN ⁴⁾	579110 R	1.355,58	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45kN ⁴⁾	579111 R	1.355,58	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 15 S (PR-2B)	Z8	574738 R	124,51	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	M 35 S (PR-2B)	Z8	574746 R	136,96	
	M 28 S (PR-2B)	Z8	574744 R	124,51	ATUSA ITALIA	M 15		570110	154,61
M 35 S (PR-2B)	Z8	574746 R	136,96	INSTALPRESS	M 18		570120	154,61	
ASSOTHERM IPM-Multistrato	H 16*		570320	168,10	STAINLESS STEEL	M 22		570130	154,61
	H 20*		570350	168,10	PRESS FITTINGS	M 28		570140	154,61
	H 26*		570370	168,10		M 35		570150	154,61
	H 32		570380	168,10	M 42 (PR-3S)	Z2	572706 R	672,57	
	TH 16*		570460	186,32	M 54 (PR-3S)	Z2	572708 R	672,57	
	TH 20*		570470	186,32	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47	
	TH 26*		570475	186,32	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58	
	TH 32		570480	186,32	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58	
	THL 32		570487	186,32	M 15 S (PR-2B)	Z8	574738 R	124,51	
	TH 40		570485	246,99	M 18 S (PR-2B)	Z8	574740 R	124,51	
	TH 50 (PZ-S)		572400	645,58	M 22 S (PR-2B)	Z8	574742 R	124,51	
	TH 63 (PZ-S)		572405	645,58	M 28 S (PR-2B)	Z8	574744 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	M 35 S (PR-2B)	Z8	574746 R	136,96	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	AUSTEC	TH 16*		570460	186,32
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	PEX-B, PEX-AL-PEX (AUS)	TH 20*		570470	186,32
	TH 32 S (PR-2B)	Z8	574798 R	136,96		TH 25*		570495	186,32
	U 16*		570765	174,33		TH 32		570480	186,32
	U 20*		570775	174,33		U 16*		570765	174,33
	U 26* ¹²⁾		570750	204,43		U 20*		570775	174,33
	U 32		570785	204,43		U 25*		570780	174,33
						U 32		570785	204,43

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
AYOR FIXOCONNECT Press	H 12*		570300	168,10
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	Rfz 12*		571320	194,05
	Rfz 16*		571325	194,05
	Rfz 20*		571330	194,05
	Rfz 25		571335	194,05
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
AYOR FIXOMULTIX	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
U 63 (PR-3B)	Z4	572837 R	733,81	
U 63 (PZ-S)		572365	645,58	
U 75 (PR-3B)	Z4	572828 R	645,58	
AYOR SOMATHERM FOR YOU -1	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	U 16*		570765	174,33
U 20*		570775	174,33	
AYOR SOMATHERM FOR YOU -2	H 12*		570300	168,10
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	Rfz 12*		571320	194,05
	Rfz 16*		571325	194,05
	Rfz 20*		571330	194,05
	Rfz 25		571335	194,05
	U 16*		570765	174,33
	U 20*		570775	174,33
U 25*		570780	174,33	

B

Bampi BALPEX serie LP	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 26* ⁽¹²⁾		570750	204,43
	U 32		570785	204,43
	U 40		570790	249,07
U 50		570795	298,89	
U 63 (PR-3B)	Z4	572837 R	733,81	
U 63 (PZ-S)		572365	645,58	
Bampi BALPEX serie MP	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Bampi BALPEX Gas	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300	168,10	
	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 25*		570360	168,10	
	H 32		570380	168,10	
	Rfz 12*		571320	194,05	
	Rfz 16*		571325	194,05	
	Rfz 20*		571330	194,05	
	Rfz 25		571335	194,05	
	U 16*		570765	174,33	
U 20*		570775	174,33		
U 25*		570780	174,33		
U 32		570785	204,43		
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310	168,10	
	H 16*		570320	168,10	
	H 18*		570340	168,10	
	H 20*		570350	168,10	
	H 25*		570360	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	Rfz 16*		571325	194,05	
	Rfz 18*		571327	194,05	
	Rfz 20*		571330	194,05	
	Rfz 25		571335	194,05	
	Rfz 32		571340	194,05	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
TH 26*		570475	186,32		
TH 32		570480	186,32		
TH 16 S (PR-2B)**	Z8	574782 R	124,51		
TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)	Z8	574798 R	136,96		
U 16*		570765	174,33		
U 18*		570770	174,33		
U 20*		570775	174,33		
U 25*		570780	174,33		
U 32		570785	204,43		
U 40		570790	249,07		
U 50		570795	298,89		
U 63 (PR-3B)	Z4	572837 R	733,81		
U 63 (PZ-S)		572365	645,58		
BEGETUBE/ IVAR	B 14*		570845	203,40	
	B 16*		570850	203,40	
	B 18*		570855	203,40	
	B 20*		570860	203,40	
	B 26		570870	224,16	
	B 32		570880	224,16	
	Fz 40		570742	205,47	
	Fz 50		570747	311,35	
	F 63 (PZ-S)		572385	645,58	
	Fz 75 (PR-3B)	Z4	572830 R	609,25	
	Béné inox Série 41	M 15		570110	154,61
M 18			570120	154,61	
M 22			570130	154,61	
M 28			570140	154,61	
M 35			570150	154,61	
M 42 (PR-3S)		Z2	572706 R	672,57	
M 54 (PR-3S)		Z2	572708 R	672,57	
M 76,1 XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47	
M 88,9 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58	
Brass Form Master-Al-Pex	H 16*		570320	168,10	
	H 18*		570340	168,10	
	H 20*		570350	168,10	
	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
Brass & Fittings PRESSMAN MultiPress	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	Rfz 16*		571325	194,05	
	Rfz 18*		571327	194,05	
	Acz 20*		572646	194,05	
	Rfz 25		571335	194,05	
	Rfz 32		571340	194,05	
	Brass & Fittings PRESSMAN RetiPress	Rfz 16*		571325	194,05
		Rfz 18*		571327	194,05
Acz 20*			572646	194,05	
Rfz 25			571335	194,05	
Rfz 32			571340	194,05	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
BRASSTECH MULTitermoSAN Brasspress	B 16*		570850	203,40	CHIALI CHIALIPEX	TH 16*		570460	186,32	
	B 20*		570860	203,40		TH 20*		570470	186,32	
	B 26		570870	224,16		TH 26*		570475	186,32	
	B 32		570880	224,16		TH 32		570480	186,32	
	F 16*		570717	177,45		TH 40		570485	246,99	
	F 20*		570727	177,45		TH 50 (PZ-S)		572400	645,58	
	F 26*		570730	191,98		TH 63 (PZ-S)		572405	645,58	
	F 16 S (PR-2B)**	Z8	574728 R	124,51		Climatrix Climatrix Rhinopex	H 16*		570320	168,10
	F 20 S (PR-2B)**	Z8	574730 R	124,51			H 20*		570350	168,10
	F 26 S (PR-2B)**	Z8	574732 R	124,51			U 16*		570765	174,33
	H 16*		570320	168,10			U 20*		570775	174,33
	H 18*		570340	168,10			U 26* ¹²⁾		570750	204,43
	H 20*		570350	168,10			TH 14*		570455	186,32
	H 26*		570370	168,10			TH 16*		570460	186,32
	TH 16*		570460	186,32			TH 18*		570465	186,32
	TH 18*		570465	186,32	TH 20*			570470	186,32	
	TH 20*		570470	186,32	TH 26*			570475	186,32	
	TH 26*		570475	186,32	TH 32		570480	186,32		
	TH 32		570480	186,32	TH 16 S (PR-2B)**	Z8	574782 R	124,51		
	TH 40		570485	246,99	TH 20 S (PR-2B)**	Z8	574788 R	124,51		
	TH 50 (PZ-S)		572400	645,58	TH 26 S (PR-2B)**	Z8	574794 R	124,51		
	TH 63 (PZ-S)		572405	645,58	TH 32 S (PR-2B)	Z8	574798 R	136,96		
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	Climatrix Variotherm	TH 11,6*		570482	186,32	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51		TH 16*		570460	186,32	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		System TH	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51			ClouSet	TH 16*		570460
	TH 32 S (PR-2B)	Z8	574798 R	136,96		TH 18*			570465	186,32
	U 16*		570765	174,33		TH 20*			570470	186,32
	U 18*		570770	174,33		TH 16 S (PR-2B)**		Z8	574782 R	124,51
	U 20*		570775	174,33		TH 18 S (PR-2B)**	Z8	574786 R	124,51	
	U 26* ¹²⁾		570750	204,43		TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	U 32		570785	204,43		Comap PEX Press	RFz 12*		571320	194,05
C					RFz 16*			571325	194,05	
Cello Products -B- Press	VUS ½" (OD 15,9 mm)		571770	186,79	RFz 20*			571330	194,05	
	VUS ¾" (OD 22,2 mm)		571775	186,79	RFz 25			571335	194,05	
	VUS 1" (OD 28,6 mm)		571780	186,79	Comap Multiskin		TH 14*		570455	186,32
	VUS 1¼" (OD 34,9 mm)		571785	186,79		TH 16*		570460	186,32	
	VUS 1½" (OD 41,3 mm)		571790	360,13		TH 18*		570465	186,32	
	VUS 2" (OD 54,0 mm)		571795	370,51		TH 20*		570470	186,32	
CGR DYNAFLU multicouche	H 16*		570320	168,10		TH 26*		570475	186,32	
	H 20*		570350	168,10	TH 32		570480	186,32		
	H 26*		570370	168,10	THL 32		570487	186,32		
	H 32		570380	168,10	TH 40		570485	246,99		
	TH 16*		570460	186,32	TH 50 (PZ-S)		572400	645,58		
	TH 20*		570470	186,32	TH 63 (PZ-S)		572405	645,58		
	TH 26*		570475	186,32	THz 75 (PR-3B)	Z4	572829 R	609,25		
	TH 32		570480	186,32	TH 16 S (PR-2B)**	Z8	574782 R	124,51		
	TH 40		570485	246,99	TH 20 S (PR-2B)**	Z8	574788 R	124,51		
	TH 50 (PZ-S)		572400	645,58	TH 26 S (PR-2B)**	Z8	574794 R	124,51		
	TH 63 (PZ-S)		572405	645,58	TH 32 S (PR-2B)	Z8	574798 R	136,96		
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	U 14*		570760	174,33		
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	U 16*		570765	174,33		
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	U 18*		570770	174,33		
	TH 32 S (PR-2B)	Z8	574798 R	136,96	U 20*		570775	174,33		
	U 16*		570765	174,33	U 32		570785	204,43		
	U 20*		570775	174,33	U 40		570790	249,07		
	U 26* ¹²⁾		570750	204,43	U 50		570795	298,89		
	U 32		570785	204,43	U 63 (PR-3B)	Z4	572837 R	733,81		
	U 40		570790	249,07	U 63 (PZ-S)		572365	645,58		
U 50		570795	298,89	U 75 (PR-3B)	Z4	572828 R	645,58			
U 63 (PR-3B)	Z4	572837 R	733,81	H 14*		570310	168,10			
U 63 (PZ-S)		572365	645,58	H 16*		570320	168,10			
CGR DYNAFLU PER	H 12*		570300	168,10	H 18*		570340	168,10		
	H 16*		570320	168,10	H 20*		570350	168,10		
	H 20*		570350	168,10	H 26*		570370	168,10		
	H 25*		570360	168,10	H 32		570380	168,10		
	RFz 12*		571320	194,05	H 40 (PZ-4G)		570390	565,67		
	RFz 16*		571325	194,05						
	RFz 20*		571330	194,05						
	RFz 25		571335	194,05						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Comap Multiskin Gas	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	THL 32		570487	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)**	Z8	574798 R	136,96	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 32		570785	204,43	
	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	COMISA Press System	TH 14*		570455	186,32
TH 16*			570460	186,32	
TH 18*			570465	186,32	
TH 20*			570470	186,32	
TH 25*			570495	186,32	
TH 26*			570475	186,32	
TH 32			570480	186,32	
TH 40			570485	246,99	
TH 50 (PZ-S)			572400	645,58	
TH 63 (PZ-S)			572405	645,58	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 18 S (PR-2B)**		Z8	574786 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
TH 25 S (PR-2B)**		Z8	574792 R	124,51	
TH 26 S (PR-2B)**		Z8	574794 R	124,51	
TH 32 S (PR-2B)**		Z8	574798 R	136,96	
H 14*			570310	168,10	
H 16*			570320	168,10	
H 18*			570340	168,10	
H 20*			570350	168,10	
H 26*			570370	168,10	
H 32		570380	168,10		
B 14*		570845	203,40		
B 16*		570850	203,40		
B 18*		570855	203,40		
B 20*		570860	203,40		
B 26		570870	224,16		
B 32		570880	224,16		
COMISA Press System Gas	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)**	Z8	574798 R	136,96	
	CONEL CONNECT INOX	M 15		570110	154,61
M 18			570120	154,61	
M 22			570130	154,61	
M 42 (PR-3S)		Z2	572706 R	672,57	
M 54 (PR-3S)		Z2	572708 R	672,57	
V 15			570115	154,61	
V 18			570125	154,61	
V 22			570135	154,61	
V 42 (PR-2B)		Z2	572850 R	322,77	
V 54 (PR-2B)		Z2	572851 R	348,72	
CONEL CONNECT MULTI	F 16*		570717	177,45	
	F 20*		570727	177,45	
	F 26*		570730	191,98	
	F 32		570735	191,98	
	F 16 S (PR-2B)**	Z8	574728 R	124,51	
	F 20 S (PR-2B)**	Z8	574730 R	124,51	
	F 26 S (PR-2B)**	Z8	574732 R	124,51	
	F 32 S (PR-2B)**	Z8	574734 R	136,96	
	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)**	Z8	574798 R	136,96	
	(DN 26)	U 16*		570765	174,33
U 20*			570775	174,33	
U 25*			570780	174,33	
U 32			570785	204,43	
VP 16*			570910	185,75	
VP 20*			570915	185,75	
VP 32			570925	205,47	
CONEL CONNECT MV2		F 16*		570717	177,45
		F 20*		570727	177,45
		F 26*		570730	191,98
		F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51	
	F 20 S (PR-2B)**	Z8	574730 R	124,51	
	F 26 S (PR-2B)**	Z8	574732 R	124,51	
	F 32 S (PR-2B)**	Z8	574734 R	136,96	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)**	Z8	574798 R	136,96		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Conex Bänninger <A> Press Inox (304)	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
	M 42 (PZ-46)		570160	498,19
	M 54 (PZ-46)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
Conex Bänninger <A> Press Inox (316L)	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
	M 42 (PZ-46)		570160	498,19
	M 54 (PZ-46)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
Conex Bänninger >B< Flex	F 16*		570717	177,45
	F 18*		570720	177,45
	F 20*		570727	177,45
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 32		570380	168,10
	Rfz 16*		571325	194,05
	Rfz 18*		571327	194,05
	Rfz 20*		571330	194,05
	Rfz 25		571335	194,05
	Rfz 32		571340	194,05
	TH 16*		570460	186,32
	TH 18*		570465	186,32
TH 20*		570470	186,32	
TH 25*		570495	186,32	
TH 32		570480	186,32	
TH 16 S (PR-2B)**	Z8	574782 R	124,51	
TH 18 S (PR-2B)**	Z8	574786 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 25 S (PR-2B)**	Z8	574792 R	124,51	
TH 32 S (PR-2B)	Z8	574798 R	136,96	
U 16*		570765	174,33	
U 18*		570770	174,33	
U 20*		570775	174,33	
U 25*		570780	174,33	
U 32		570785	204,43	
Conex Bänninger >B< Flex Gas	F 16*		570717	177,45
	F 18*		570720	177,45
	F 20*		570727	177,45
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 32		570380	168,10
	Rfz 16*		571325	194,05
Rfz 18*		571327	194,05	
Rfz 20*		571330	194,05	
Rfz 25		571335	194,05	
Rfz 32		571340	194,05	
TH 16*		570460	186,32	
TH 18*		570465	186,32	
TH 20*		570470	186,32	
TH 25*		570495	186,32	
TH 32		570480	186,32	
TH 16 S (PR-2B)**	Z8	574782 R	124,51	
TH 18 S (PR-2B)**	Z8	574786 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 25 S (PR-2B)**	Z8	574792 R	124,51	
TH 32 S (PR-2B)	Z8	574798 R	136,96	
U 16*		570765	174,33	
U 18*		570770	174,33	
U 20*		570775	174,33	
U 25*		570780	174,33	
U 32		570785	204,43	
Conex Bänninger >B< MaxiPro	BMP ¼"		571700 R	184,71
	BMP ⅜"		571702 R	184,71
	BMP ½"		571704 R	184,71
	BMP ⅝"		571706 R	184,71
	BMP ¾"		571708 R	184,71
	BMP 1"		571710 R	184,71
	BMP 1 ¼"		571712 R	184,71

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€		
Conex Bänninger >B- Press	V 12		570107	154,61	Conex Bänninger >B- Press XL stainless	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63		
	V 14		570112	154,61		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47		
	V 15		570115	154,61		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		
	V 16		570117	154,61		CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	1.355,58		
	V 18		570125	154,61		CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	1.355,58		
	V 22		570135	154,61		Conex Bänninger >B- Press Solar	V 12		570107	154,61	
	V 28		570145	154,61			V 14		570112	154,61	
	V 35		570155	154,61			V 15		570115	154,61	
	V 42		570165	360,13			V 16		570117	154,61	
	V 54		570175	370,51			V 18		570125	154,61	
	V 12 S (PR-2B)	Z8	574748 R	124,51	V 22			570135	154,61		
	V 14 S (PR-2B)	Z8	574800 R	124,51	V 28			570145	154,61		
	V 15 S (PR-2B)	Z8	574752 R	124,51	V 35			570155	154,61		
	V 16 S (PR-2B)	Z8	574802 R	124,51	V 42			570165	360,13		
	V 18 S (PR-2B)	Z8	574756 R	124,51	V 54			570175	370,51		
	V 22 S (PR-2B)	Z8	574758 R	124,51	V 12 S (PR-2B)		Z8	574748 R	124,51		
	V 28 S (PR-2B)	Z8	574760 R	124,51	V 14 S (PR-2B)		Z8	574800 R	124,51		
	V 35 S (PR-2B)	Z8	574762 R	136,96	V 15 S (PR-2B)		Z8	574752 R	124,51		
	M 15		570110	154,61	V 16 S (PR-2B)		Z8	574802 R	124,51		
	M 22		570130	154,61	V 18 S (PR-2B)		Z8	574756 R	124,51		
	M 28		570140	154,61	V 22 S (PR-2B)	Z8	574758 R	124,51			
	Conex Bänninger >B- Press XL copper	VFz 64,0 (PR-3B)	Z5	572815 R	609,25	V 28 S (PR-2B)	Z8	574760 R	124,51		
		CBVFz 66,7 (PR-3B)	Z5	572847 R	609,25	V 35 S (PR-2B)	Z8	574762 R	136,96		
		VFz 76,1 (PR-3B) ⁶⁾	Z5	572816 R	609,25	D	Debrunner Acifer d-a Presssystem C-Stahl	M 12	570100	154,61	
		VFz 88,9 (PR-3B) ⁶⁾	Z5	572817 R	645,58			M 15	570110	154,61	
VFz 108,0 (PR-3B) ⁶⁾		Z5	572818 R	645,58	M 18			570120	154,61		
Conex Bänninger >B- Press carbon	V 15		570115	154,61	M 22			570130	154,61		
	V 18		570125	154,61	M 28			570140	154,61		
	V 22		570135	154,61	M 35			570150	154,61		
	V 28		570145	154,61	M 42 (PR-3S)			Z2	572706 R	672,57	
	V 35		570155	154,61	M 54 (PR-3S)			Z2	572708 R	672,57	
	V 42		570165	360,13	M 76,1 XL (PR-3S)			Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	V 42 (PR-2B)	Z2	572850 R	322,77	M 88,9 G XL (PR-3S)			Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	V 54		570175	370,51	M 108,0 G XL (PR-3S)			Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	V 54 (PR-2B)	Z2	572851 R	348,72	M 12 S (PR-2B)			Z8	574736 R	124,51	
	V 15 S (PR-2B)	Z8	574752 R	124,51	M 15 S (PR-2B)			Z8	574738 R	124,51	
V 18 S (PR-2B)	Z8	574756 R	124,51	M 18 S (PR-2B)	Z8			574740 R	124,51		
V 22 S (PR-2B)	Z8	574758 R	124,51	M 22 S (PR-2B)	Z8			574742 R	124,51		
V 28 S (PR-2B)	Z8	574760 R	124,51	M 28 S (PR-2B)	Z8	574744 R	124,51				
V 35 S (PR-2B)	Z8	574762 R	136,96	M 35 S (PR-2B)	Z8	574746 R	136,96				
Conex Bänninger >B- Press XL carbon	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63	DUOPIPE SYSTEMS DUOFIL MKSYSTEM	U 16*		570765	174,33		
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47		U 18*		570770	174,33		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		U 20*		570775	174,33		
	CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	1.355,58		U 25*		570780	174,33		
	CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R	1.355,58		U 32		570785	204,43		
Conex Bänninger >B- Press Gas	V 12		570107	154,61		DW Verbundrohr multitubo systems	U 16*		570765	174,33	
	V 14		570112	154,61			U 18*		570770	174,33	
	V 15		570115	154,61			U 20*		570775	174,33	
	V 16		570117	154,61			U 25*		570780	174,33	
	V 18		570125	154,61			U 32		570785	204,43	
	V 22		570135	154,61	U 40			570790	249,07		
	V 28		570145	154,61	U 50			570795	298,89		
	V 35		570155	154,61	U 63 (PR-3B)		Z4	572837 R	733,81		
	V 42		570165	360,13	U 63 (PZ-S)			572365	645,58		
	V 54		570175	370,51	U 75 (PR-3B)		Z4	572828 R	645,58		
	V 12 S (PR-2B)	Z8	574748 R	124,51	E	EBRILLE Isomonflex	U 16*		570765	174,33	
	V 14 S (PR-2B)	Z8	574800 R	124,51			U 20*		570775	174,33	
	V 15 S (PR-2B)	Z8	574752 R	124,51			U 25*		570780	174,33	
	V 16 S (PR-2B)	Z8	574802 R	124,51			H 26*		570370	168,10	
	V 18 S (PR-2B)	Z8	574756 R	124,51			TH 26*		570475	186,32	
V 22 S (PR-2B)	Z8	574758 R	124,51	TH 26 S (PR-2B)**			Z8	574794 R	124,51		
V 28 S (PR-2B)	Z8	574760 R	124,51	U 32				570785	204,43		
V 35 S (PR-2B)	Z8	574762 R	136,96	EBRILLE Monflex			U 16*		570765	174,33	
Conex Bänninger >B- Press Inox	V 15		570115				154,61	U 20*		570775	174,33
	V 18		570125				154,61	U 25*		570780	174,33
	V 22		570135				154,61	H 26*		570370	168,10
	V 28		570145				154,61	TH 26*		570475	186,32
	V 35		570155				154,61	TH 26 S (PR-2B)**	Z8	574794 R	124,51
V 42		570165	360,13	U 32				570785	204,43		
V 42 (PR-2B)	Z2	572850 R	322,77	EBRILLE Monflex			U 16*		570765	174,33	
V 54		570175	370,51		U 20*		570775	174,33			
V 54 (PR-2B)	Z2	572851 R	348,72		U 25*		570780	174,33			
V 15 S (PR-2B)	Z8	574752 R	124,51		H 26*		570370	168,10			
V 18 S (PR-2B)	Z8	574756 R	124,51		TH 26*		570475	186,32			
V 22 S (PR-2B)	Z8	574758 R	124,51		TH 26 S (PR-2B)**	Z8	574794 R	124,51			
V 28 S (PR-2B)	Z8	574760 R	124,51	U 32		570785	204,43				
V 35 S (PR-2B)	Z8	574762 R	136,96								

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	M 15		570110	154,61
EFFEBI-PRESS	M 18		570120	154,61
Aisi316	M 22		570130	154,61
System M Profile ¹⁾	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S) ⁵⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
EFFEBI	V 12		570107	154,61
EFFEBI-PRESS	V 15		570115	154,61
Aisi316	V 18		570125	154,61
System V Profile	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
EFFEBI	M 12		570100	154,61
EFFEBI-PRESS	M 15		570110	154,61
Carbon-S	M 18		570120	154,61
System M Profile ¹⁾	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
EFFEBI	V 12		570107	154,61
EFFEBI-PRESS	V 15		570115	154,61
Carbon-S	V 18		570125	154,61
System V Profile	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
EFFEBI	V 12		570107	154,61
EFFEBI-PRESS	V 14		570112	154,61
COPPER	V 15		570115	154,61
	V 16		570117	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 14 S (PR-2B)	Z8	574800 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 16 S (PR-2B)	Z8	574802 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
EFFEBI	V 12		570107	154,61
EFFEBI-PRESS	V 15		570115	154,61
UNICO	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	V 12		570107	154,61
EFFEBI-PRESS	V 15		570115	154,61
UNICO (GAS)	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
EFFEBI	M 15		570110	154,61
PRESSTIGE	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
EFFEBI	M 15		570110	154,61
PRESSTIGE 4E05	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
EFFEBI	M 15		570110	154,61
PRESSTIGE-GAS	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
EFFEBI	TH 16*		570460	186,32
TOF-GAS	TH 20*		570470	186,32
MULTIPINZA	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32		570785	204,43

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EFFEBI	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
TOF	TH 26*		570475	186,32
	TH 32		570480	186,32
MULTIPINZA	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	F 16*		570717	177,45
	F 18*		570720	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 32		570735	191,98
	Fz 40		570742	205,47
	Fz 50		570747	311,35
	F 63 (PZ-S)		572385	645,58
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 24 S (PR-2B)**	Z8	574732 R	124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
U 26 ¹²⁾		570750	204,43	
U 32		570785	204,43	
U 40		570790	249,07	
U 50		570795	298,89	
U 63 (PR-3B)	Z4	572837 R	733,81	
U 63 (PZ-S)		572365	645,58	
B 16*		570850	203,40	
B 18*		570855	203,40	
B 20*		570860	203,40	
B 26		570870	224,16	
B 32		570880	224,16	
EFIELD MULTILAYER PRESS DINGAS	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
EFIELD MULTILAYER PRESS WATER	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
Elkhart	VUS ½" (OD 15,9 mm)		571770	186,79
APOLLOXPRESS	VUS ¾" (OD 22,2 mm)		571775	186,79
Fittings Copper	VUS 1" (OD 28,6 mm)		571780	186,79
and Low-Lead	VUS 1½" (OD 34,9 mm)		571785	186,79
Brass	VUS 1½" (OD 41,3 mm)		571790	360,13
	VUS 2" (OD 54,0 mm)		571795	370,51
Elkhart	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25
APOLLOXPRESS	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25
LD-C Fittings	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58
Copper				

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
EMMETI GERPEX-FIVPRESS	B 16*		570850	203,40	
	B 20*		570860	203,40	
	B 26		570870	224,16	
	B 32		570880	224,16	
	H 16*		570320	168,10	
	H 20*		570350	168,10	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	EMPUR	TH 14*		570455	186,32
		TH 15*		570457	186,32
		TH 16*		570460	186,32
		TH 17*		570462	186,32
		TH 20*		570470	186,32
		TH 25*		570495	186,32
		TH 14 S (PR-2B)**	Z8	574778 R	124,51
TH 15 S (PR-2B)**		Z8	574780 R	124,51	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 17 S (PR-2B)**		Z8	574784 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
TH 25 S (PR-2B)**		Z8	574792 R	124,51	
Esta Rohr simplesta SH M		M 15		570110	154,61
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PZ-4G)		570160	498,19	
	M 54 (PZ-4G)		570170	498,19	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96		
Esta Rohr simplesta ST M	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PZ-4G)		570160	498,19	
	M 54 (PZ-4G)		570170	498,19	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58		
M 15 S (PR-2B)	Z8	574738 R	124,51		
M 18 S (PR-2B)	Z8	574740 R	124,51		
M 22 S (PR-2B)	Z8	574742 R	124,51		
M 28 S (PR-2B)	Z8	574744 R	124,51		
M 35 S (PR-2B)	Z8	574746 R	136,96		
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		570100	154,61	
	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 12 S (PR-2B)	Z8	574736 R	124,51		
M 15 S (PR-2B)	Z8	574738 R	124,51		
M 18 S (PR-2B)	Z8	574740 R	124,51		
M 22 S (PR-2B)	Z8	574742 R	124,51		
M 28 S (PR-2B)	Z8	574744 R	124,51		
M 35 S (PR-2B)	Z8	574746 R	136,96		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacture.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacture.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacture.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
EUROTUBI	M 15		570110	154,61
EUROPA	M 18		570120	154,61
Inox Pressfitting	M 22		570130	154,61
System M-Profile ¹⁾	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
Evans	VAU 15 (½") (OD 12,7 mm)		572687	159,80
Components	VAU 20 (¾") (OD 19,1 mm)		572689	159,80
Presslok	VAU 25 (1") (OD 25,4 mm)		572691	159,80
	ECI 1½"		571932	200,28
	ECI 2" (PZ-4G)		571934	498,19
	ECI 2½" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104 R	1.056,63
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105 R	1.161,47
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106 R	1.355,58
F				
FAR Rubinetterie	TH 14*		570455	186,32
PRESSFAR	TH 16*		570460	186,32
	TH 17*		570462	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 17 S (PR-2B)**	Z8	574784 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 14*		570310	168,10
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	U 14*		570760	174,33
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
	U 63 (PZ-S)		572365	645,58
F.B.Q. BARONIO	V 12		570107	154,61
BQ PRESS SOLAR	V 14		570112	154,61
	V 15		570115	154,61
	V 16		570117	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 14 S (PR-2B)	Z8	574800 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	VG 16 S (PR-2B)	Z8	574754 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
F.B.Q. BARONIO	V 12		570107	154,61
BQ PRESS WATER	V 14		570112	154,61
	V 15		570115	154,61
	V 16		570117	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 14 S (PR-2B)	Z8	574800 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	VG 16 S (PR-2B)	Z8	574754 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
F.B.Q. BARONIO	V 12		570107	154,61
BQ PRESS GAS	V 14		570112	154,61
	V 15		570115	154,61
	V 16		570117	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 14 S (PR-2B)	Z8	574800 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	VG 16 S (PR-2B)	Z8	574754 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
FERCOFLOOR	RfZ 16*		571325	194,05
DUO Press	RfZ 20*		571330	194,05
FERCO PEX	RfZ 25		571335	194,05
	RfZ 32		571340	194,05
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
FERCOFLOOR	RfZ 16*		571325	194,05
DUO Press	RfZ 20*		571330	194,05
MULTIFER	RfZ 25		571335	194,05
	RfZ 32		571340	194,05
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
FERRO systems	TH 16*		570460	186,32
BRASELI	TH 20*		570470	186,32
GPF GAS	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
FERRO systems	U 16*		570765	174,33
BRASELI	U 18*		570770	174,33
GPF MULT	U 20*		570775	174,33
Pressfitting	U 25*		570780	174,33
MULTICAPA	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
FERRO systems	U 16*		570765	174,33
BRASELI	U 18*		570770	174,33
GPF PPSU	U 20*		570775	174,33
Pressfitting	U 25*		570780	174,33
PEX y MULTICAPA	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
FERRO systems	RfZ 16*		571325	194,05
BRASELI	RfZ 20*		571330	194,05
GPF PRESS	RfZ 25		571335	194,05
Pressfitting PEX	RfZ 32		571340	194,05
FILINOX	FTB 15		571432	224,16
Filpress	FTB 18		571434	224,16
	FTB 22		571436	224,16
	FTB 28		571438	224,16
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€		
FILINOX Instalpress Steel	M 15		570110	154,61	FORZA WATER CRIMP (AUS)	K16/P18*		572600	194,05		
	M 18		570120	154,61		K/20*		572605	194,05		
	M 22		570130	154,61		K/25*		572610	194,05		
	M 28		570140	154,61		K32		572615	194,05		
	M 35		570150	154,61		K1/40		572620	194,05		
	M 42 (PR-3S)	Z2	572706 R	672,57		K1/50		572625	318,61		
	M 54 (PR-3S)	Z2	572708 R	672,57		FORZA STAINLESS WATER CRIMP	K16/P18*		572600	194,05	
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47			K/20*		572605	194,05	
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58			FORZA	U 16*	570765	174,33	
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58			STESSO PEX	U 20*	570775	174,33	
	M 15 S (PR-2B)	Z8	574738 R	124,51			WATER AND GAS	U 25*	570780	174,33	
	M 18 S (PR-2B)	Z8	574740 R	124,51			CRIMP	U 32	570785	204,43	
	M 22 S (PR-2B)	Z8	574742 R	124,51			(AUS)	U 40	570790	249,07	
	M 28 S (PR-2B)	Z8	574744 R	124,51			U 50		570795	298,89	
	M 35 S (PR-2B)	Z8	574746 R	136,96			U 63 (PZ-S)		572365	645,58	
	FILINOX Instalpress Inox	M 15		570110			154,61	FORZA	K16/P18*	572600	194,05
		M 18		570120			154,61	GAS CRIMP	K/20*	572605	194,05
M 22			570130	154,61	(AUS)		K/25*	572610	194,05		
M 28			570140	154,61	K32			572615	194,05		
M 35			570150	154,61	K1/40			572620	194,05		
M 42 (PR-3S)		Z2	572706 R	672,57	K1/50			572625	318,61		
M 54 (PR-3S)		Z2	572708 R	672,57	FORZA COPPER V PRESS (AUS)		VAU 15 (OD 12,7 mm)	572687	159,80		
M 76,1 XL (PR-3S)		Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47			VAU 20 (OD 19,1 mm)		572689	159,80	
M 88,9 G XL (PR-3S)		Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58		VAU 25 (OD 25,4 mm)		572691	159,80		
M 108,0 G XL (PR-3S)		Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58		VAU 32 (OD 31,8 mm)		572693	168,10		
M 15 S (PR-2B)		Z8	574738 R	124,51		VAU 40 (OD 38,1 mm)		572695	249,07		
M 18 S (PR-2B)		Z8	574740 R	124,51		VAU 50 (OD 50,8 mm)		572697	441,10		
M 22 S (PR-2B)		Z8	574742 R	124,51		VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	609,25		
M 28 S (PR-2B)		Z8	574744 R	124,51		VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	609,25		
M 35 S (PR-2B)		Z8	574746 R	136,96		VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	645,58		
FITTINGS ESTÁNDAR ECO-PRESS		RFz 16*		571325		194,05	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	124,51	
		RFz 20*		571330		194,05	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	124,51	
	RFz 25		571335	194,05		VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	136,96		
	RFz 32		571340	194,05		FORZA STAINLESS V PRESS (AUS)	V 15	570115	154,61		
	FITTINGS ESTÁNDAR MULTICAPA	RFz 16*		571325			194,05	V 22	570135	154,61	
RFz 18*			571327	194,05			V 28	570145	154,61		
RFz 20*			571330	194,05			V 35	570155	154,61		
RFz 25			571335	194,05			V 42	570165	360,13		
RFz 32			571340	194,05	V 54		570175	370,51			
FITTINGS ESTÁNDAR PE-X	RFz 16*		571325	194,05	M 76,1 XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47		
	RFz 20*		571330	194,05	M 88,9 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58		
	RFz 25		571335	194,05	M 108,0 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58		
	RFz 32		571340	194,05	V 15 S (PR-2B)		Z8	574752 R	124,51		
	FORNARA ForPress	B 16*		570850	203,40		V 22 S (PR-2B)	Z8	574758 R	124,51	
B 20*			570860	203,40	V 28 S (PR-2B)		Z8	574760 R	124,51		
B 26			570870	224,16	V 35 S (PR-2B)		Z8	574762 R	136,96		
B 32			570880	224,16	FRABO		M 15	570110	154,61		
F 16*			570717	177,45			FRABOPRESS	M 18	570120	154,61	
F 20*			570727	177,45			316 GAS M	M 22	570130	154,61	
F 26*			570730	191,98			M 28	570140	154,61		
F 32			570735	191,98		M 35	570150	154,61			
F 16 S (PR-2B)**		Z8	574728 R	124,51		M 42 (PR-3S)	Z2	572706 R	672,57		
F 20 S (PR-2B)**		Z8	574730 R	124,51		M 54 (PR-3S)	Z2	572708 R	672,57		
F 26 S (PR-2B)**		Z8	574732 R	124,51		M 15 S (PR-2B)	Z8	574738 R	124,51		
F 32 S (PR-2B)		Z8	574734 R	136,96		M 18 S (PR-2B)	Z1	574740 R	124,51		
H 16*			570320	168,10		M 22 S (PR-2B)	Z8	574742 R	124,51		
H 20*			570350	168,10		M 28 S (PR-2B)	Z8	574744 R	124,51		
H 26*			570370	168,10		M 35 S (PR-2B)	Z8	574746 R	136,96		
H 32			570380	168,10		FRABO	V 15	570115	154,61		
TH 16*			570460	186,32			FRABOPRESS	V 18	570125	154,61	
TH 20*		570470	186,32	316 GAS V			V 22	570135	154,61		
TH 26*		570475	186,32	V 28			570145	154,61			
TH 32		570480	186,32	V 35			570155	154,61			
TH 16 S (PR-2B)**	Z8	574782 R	124,51	V 42	570165		360,13				
TH 20 S (PR-2B)**	Z8	574788 R	124,51	V 42 (PR-2B)	Z2		572850 R	322,77			
TH 26 S (PR-2B)**	Z8	574794 R	124,51	V 54	570175		370,51				
TH 32 S (PR-2B)	Z8	574798 R	136,96	V 54 (PR-2B)	Z2		572851 R	348,72			
U 16*		570765	174,33	V 15 S (PR-2B)	Z8		574752 R	124,51			
U 20*		570775	174,33	V 18 S (PR-2B)	Z8		574756 R	124,51			
U 26* ⁽¹²⁾		570750	204,43	V 22 S (PR-2B)	Z8		574758 R	124,51			
U 32		570785	204,43	V 28 S (PR-2B)	Z8		574760 R	124,51			
				V 35 S (PR-2B)	Z8		574762 R	136,96			

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88,9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
FRABO FRABOPRESS 316 M	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
FRABO FRABOPRESS 316 V	V 15		570115	154,61	
	V 18		570125	154,61	
	V 22		570135	154,61	
	V 28		570145	154,61	
	V 35		570155	154,61	
	V 42		570165	360,13	
	V 42 (PR-2B)	Z2	572850 R	322,77	
	V 54		570175	370,51	
	V 54 (PR-2B)	Z2	572851 R	348,72	
	V 15 S (PR-2B)	Z8	574752 R	124,51	
	V 18 S (PR-2B)	Z8	574756 R	124,51	
	V 22 S (PR-2B)	Z8	574758 R	124,51	
	V 28 S (PR-2B)	Z8	574760 R	124,51	
	V 35 S (PR-2B)	Z8	574762 R	136,96	
	FRABO FRABOPRESS CHROME	V 12		570107	154,61
		V 15		570115	154,61
V 18			570125	154,61	
V 22			570135	154,61	
V 12 S (PR-2B)		Z8	574748 R	124,51	
V 15 S (PR-2B)		Z8	574752 R	124,51	
V 18 S (PR-2B)		Z8	574756 R	124,51	
V 22 S (PR-2B)		Z8	574758 R	124,51	
FRABO FRABOPRESS C-STEEL M		M 15		570110	154,61
		M 18		570120	154,61
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
FRABO FRABOPRESS C-STEEL V	V 12		570107	154,61	
	V 15		570115	154,61	
	V 18		570125	154,61	
	V 22		570135	154,61	
	V 28		570145	154,61	
	V 35		570155	154,61	
	V 42		570165	360,13	
	V 42 (PR-2B)	Z2	572850 R	322,77	
	V 54		570175	370,51	
	V 54 (PR-2B)	Z2	572851 R	348,72	
	V 12 S (PR-2B)	Z8	574748 R	124,51	
	V 15 S (PR-2B)	Z8	574752 R	124,51	
	V 18 S (PR-2B)	Z8	574756 R	124,51	
	V 22 S (PR-2B)	Z8	574758 R	124,51	
	V 28 S (PR-2B)	Z8	574760 R	124,51	
	V 35 S (PR-2B)	Z8	574762 R	136,96	
FRABO FRABOPRESS GAS M	M 12		570100	154,61	
	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 12 S (PR-2B)	Z8	574736 R	124,51	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	FRABO FRABOPRESS GAS V	V 12		570107	154,61
		V 15		570115	154,61
V 18			570125	154,61	
V 22			570135	154,61	
V 28			570145	154,61	
V 35			570155	154,61	
V 42			570165	360,13	
V 42 (PR-2B)		Z2	572850 R	322,77	
V 54			570175	370,51	
V 54 (PR-2B)		Z2	572851 R	348,72	
V 12 S (PR-2B)		Z8	574748 R	124,51	
V 15 S (PR-2B)		Z8	574752 R	124,51	
V 18 S (PR-2B)		Z8	574756 R	124,51	
V 22 S (PR-2B)		Z8	574758 R	124,51	
V 28 S (PR-2B)		Z8	574760 R	124,51	
V 35 S (PR-2B)		Z8	574762 R	136,96	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
FRABO FRABOPRESS KOMBI	V 12		570107	154,61
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
V 18 S (PR-2B)	Z8	574756 R	124,51	
V 22 S (PR-2B)	Z8	574758 R	124,51	
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
FRABO FRABOPRESS M	M 12		570100	154,61
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
FRABO FRABOPRESS SOLAR	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
FRABO FRABOPRESS V	V 12		570107	154,61
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
Fränkische alpex-duo XS	F 16*		570717	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51
	F 32 S (PR-2B)**	Z8	574734 R	136,96
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)**	Z8	574798 R	136,96
Fränkische alpex F50 PROF1	F 16*		570717	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51
	F 32 S (PR-2B)**	Z8	574734 R	136,96
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
TH 16 S (PR-2B)**	Z8	574782 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51	
TH 32 S (PR-2B)**	Z8	574798 R	136,96	
(DN 26)	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	VP 16*		570910	185,75
	VP 20*		570915	185,75
	VP 32		570925	205,47

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
Fränkische alpeX L	Fz 40		570742	205,47	
	Fz 50		570747	311,35	
	F 63 (PZ-S)		572385	645,58	
	Fz 75 (PR-3B)	Z4	572830 R	609,25	
G					
gaboTherm H+S	TH 10*		570467	186,32	
	TH 12*		570452	186,32	
	TH 14*		570455	186,32	
	TH 15*		570457	186,32	
	TH 16*		570460	186,32	
	TH 17*		570462	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 10 S (PR-2B)**	Z8	574772 R	124,51	
	TH 12 S (PR-2B)**	Z8	574776 R	124,51	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 15 S (PR-2B)**	Z8	574780 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 17 S (PR-2B)**	Z8	574784 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	Gallagher USA YogaPipe ACR	H 12* (1/4")		570300	168,10
		U 14* (3/8")		570760	174,33
		U 16* (1/2")		570765	174,33
U 18* (5/8")			570770	174,33	
U 20* (3/4")			570775	174,33	
U 25* (7/8")			570780	174,33	
U 32 (1 1/4")			570785	204,43	
Geberit Mapress C-STAHl	M 12		570100	154,61	
	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 35 (PR-3S)	Z2	572727 R	672,57	
	M 42 (PZ-4G)		570160	498,19	
	M 54 (PZ-4G)		570170	498,19	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 12 S (PR-2B)	Z8	574736 R	124,51	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96		
Geberit Mapress C-STAHl Sprinkler nass	M 22		570130	154,61	
	M 28		570140	154,61	
Sprinkler nass	M 35 (PR-3S)	Z2	572727 R	672,57	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
Geberit Mapress Edelstahl	M 12		570100	154,61
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
Geberit Mapress Edelstahl Gas	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47
	M 88,9 G XL (PR-3S) ⁷⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
M 108,0 G XL (PR-3S) ⁷⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
Geberit Mapress Edelstahl Sprinkler	M 22		570130	154,61
	M 28		570140	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
Geberit Mapress Kupfer	M 12		570100	154,61
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
M 54 (PR-3S)	Z2	572708 R	672,57	
M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 12 S (PR-2B)	Z8	574736 R	124,51	
M 15 S (PR-2B)	Z8	574738 R	124,51	
M 18 S (PR-2B)	Z8	574740 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51	
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
Geberit Mapress Kupfer Gas	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
M 42 (PR-3S)	Z2	572706 R	672,57	
M 54 (PR-3S)	Z2	572708 R	672,57	
M 15 S (PR-2B)	Z8	574738 R	124,51	
M 18 S (PR-2B)	Z8	574740 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51	
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Geberit Mepla	G 16*		570400	186,79
	G 20*		570410	186,79
	G 26*		570420	198,21
	G 32		570430	211,70
	G 40		570440	273,98
	G 50		570450	286,44
	G 63 (PZ-S)		572470	809,59
Geberit Mepla Therm	G 16*		570400	186,79
	G 20*		570410	186,79
	G 26*		570420	198,21
Geberit Volex	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
General Fittings 5T00	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 63 (PZ-S)		572365	645,58
U 63 (PR-3B)	Z4	572837 R	733,81	
General Fittings Ewoprex	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 63 (PZ-S)		572365	645,58
U 63 (PR-3B)	Z4	572837 R	733,81	
General Fittings Serie 5S00	B 16*		570850	203,40
	B 18*		570855	203,40
	B 20*		570860	203,40
	B 26		570870	224,16
	B 32		570880	224,16
	F 16*		570717	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
TH 18 S (PR-2B)**	Z8	574786 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 25 S (PR-2B)**	Z8	574792 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51	
TH 32 S (PR-2B)	Z8	574798 R	136,96	
U 16*		570765	174,33	
U 18*		570770	174,33	
U 20*		570775	174,33	
U 25*		570780	174,33	
U 32		570785	204,43	
U 40		570790	249,07	
U 63 (PZ-S)		572365	645,58	
U 63 (PR-3B)	Z4	572837 R	733,81	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
General Fittings Trident	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
U 20*		570775	174,33	
U 32		570785	204,43	
General Fittings Trident Gas	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	U 16*		570765	174,33
	U 20*		570775	174,33
U 32		570785	204,43	
Giacomini Raccordi RM Giacomini	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	U 16*		570765	174,33
	U 20*		570775	174,33
U 32		570785	204,43	
U 40		570790	249,07	
U 50		570795	298,89	
Giacomini RM MULTIGAS	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
Giacomini Valvole Giacomini serie R850V	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 54		570175	370,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
	SA 15		570935	185,75
SA 18		570940	185,75	
SA 22		570945	185,75	
SA 28		570950	185,75	
SA 35		570955	185,75	
M 15		570110	154,61	
M 18		570120	154,61	
M 22		570130	154,61	
M 28		570140	154,61	
M 35		570150	154,61	
M 15 S (PR-2B)	Z8	574738 R	124,51	
M 18 S (PR-2B)	Z8	574740 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51	
M 28 S (PR-2B)	Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	
Golan Pipe Systems (Scandinavia) Alu-Pres	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
U 50		570795	298,89	
U 63 (PZ-S)		572365	645,58	
U 63 (PR-3B)	Z4	572837 R	733,81	
U 75 (PR-3B)	Z4	572828 R	645,58	
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770	186,79
	VUS ¾" (OD 22,2 mm)		571775	186,79
	VUS 1" (OD 28,6 mm)		571780	186,79
	VUS 1¼" (OD 34,9 mm)		571785	186,79
	VUS 1½" (OD 41,3 mm)		571790	360,13
	VUS 2" (OD 54,0 mm)		571795	370,51
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
GS Wärmesysteme System TH	TH 14*		570455	186,32	Herotec tempusPRESS PLUS	H 16*		570320	168,10
	TH 16*		570460	186,32		H 20*		570350	168,10
	TH 20*		570470	186,32		H 25*		570360	168,10
	TH 26*		570475	186,32		H 32		570380	168,10
	TH 32		570480	186,32		H 40 (PZ-4G)		570390	565,67
	TH 40		570485	246,99		RFz 16*		571325	194,05
	TH 50 (PZ-S)		572400	645,58		RFz 20*		571330	194,05
	TH 63 (PZ-S)		572405	645,58		RFz 25		571335	194,05
	TH 14 S (PR-2B)**	Z8	574778 R	124,51		RFz 32		571340	194,05
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		TH 16*		570460	186,32
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		TH 20*		570470	186,32
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		TH 25*		570495	186,32
	TH 32 S (PR-2B)**	Z8	574798 R	136,96		TH 32		570480	186,32
	GS Wärmesysteme System V	V 15		570115		154,61	TH 40		570485
V 18			570125	154,61	TH 50 (PZ-S)		572400	645,58	
V 22			570135	154,61	TH 63 (PZ-S)		572405	645,58	
V 28			570145	154,61	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
V 35			570155	154,61	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
V 15 S (PR-2B)		Z8	574752 R	124,51	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
V 18 S (PR-2B)		Z8	574756 R	124,51	TH 32 S (PR-2B)	Z8	574798 R	136,96	
V 22 S (PR-2B)		Z8	574758 R	124,51	U 16*		570765	174,33	
V 28 S (PR-2B)		Z8	574760 R	124,51	U 20*		570775	174,33	
V 35 S (PR-2B)		Z8	574762 R	136,96	U 25*		570780	174,33	
H					U 32		570785	204,43	
HASTINIK Hastinik/Hitpress		M 15		570110	154,61	U 40		570790	249,07
		M 18		570120	154,61	U 50		570795	298,89
		M 22		570130	154,61	U 63 (PZ-S)		572365	645,58
	M 28		570140	154,61	U 63 (PR-3B)	Z4	572837 R	733,81	
	M 35		570150	154,61	U 75 (PR-3B)	Z4	572828 R	645,58	
	M 42 (PZ-4G)		570160	498,19	Herotec tempusPRESS PLUS PPSU	H 16*		570320	168,10
	M 54 (PZ-4G)		570170	498,19		H 20*		570350	168,10
	M 42 (PR-3S)	Z2	572706 R	672,57		H 25*		570380	168,10
	M 54 (PR-3S)	Z2	572708 R	672,57		TH 16*		570460	186,32
	M 76,1 XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47		TH 20*		570470	186,32
	M 88,9 G XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58		TH 25*		570495	186,32
	M 108,0 G XL (PR-3S)	Z6 XL ¹⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58		TH 32		570480	186,32
	M 15 S (PR-2B)	Z8	574738 R	124,51		TH 40		570485	246,99
	M 18 S (PR-2B)	Z8	574740 R	124,51		TH 50 (PZ-S)		572400	645,58
M 22 S (PR-2B)	Z8	574742 R	124,51	TH 63 (PZ-S)			572405	645,58	
M 28 S (PR-2B)	Z8	574744 R	124,51	TH 16 S (PR-2B)**		Z8	574782 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96	TH 20 S (PR-2B)**		Z8	574788 R	124,51	
heima24	TH 16*		570460	186,32		TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 20*		570470	186,32		TH 32 S (PR-2B)	Z8	574798 R	136,96
	TH 26*		570475	186,32	U 16*		570765	174,33	
	TH 32		570480	186,32	U 20*		570775	174,33	
	TH 40		570485	246,99	U 25*		570780	174,33	
	TH 50 (PZ-S)		572400	645,58	U 32		570785	204,43	
	TH 63 (PZ-S)		572405	645,58	U 40		570790	249,07	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	U 50		570795	298,89	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	U 63 (PR-3B)	Z4	572837 R	733,81	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	U 63 (PZ-S)		572365	645,58	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	U 75 (PR-3B)	Z4	572828 R	645,58	
	U 16*		570765	174,33	HERZ PIPEFIX	TH 10*		570467	186,32
	U 20*		570775	174,33		TH 16*		570460	186,32
	U 32		570785	204,43		TH 20*		570470	186,32
U 40		570790	249,07	TH 26*			570475	186,32	
U 50		570795	298,89	TH 32			570480	186,32	
U 63 (PR-3B)	Z4	572837 R	733,81	TH 40			570485	246,99	
U 75 (PR-3B)	Z4	572828 R	645,58	TH 50 (PZ-S)			572400	645,58	
HELIROMA Klimapress	U 16*		570765	174,33	TH 63 (PZ-S)		572405	645,58	
	U 20*		570775	174,33	THz 75 (PR-3B)	Z4	572829 R	609,25	
	U 25*		570780	174,33	TH 10 S (PR-2B)**	Z8	574772 R	124,51	
	U 32		570785	204,43	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
HELIROMA Klimapress PPSU	U 16*		570765	174,33	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	U 20*		570775	174,33	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	U 25*		570780	174,33	TH 32 S (PR-2B)**	Z8	574798 R	136,96	
	U 32		570785	204,43	HIDRONIX MULTIGAS	TH 16*		570460	186,32
TH 14*		570455	186,32	TH 20*			570470	186,32	
TH 16*		570460	186,32	TH 26*			570475	186,32	
TH 18*		570465	186,32						
TH 20*		570470	186,32						
TH 26*		570475	186,32						
HE 32		571900	223,12						
HEz 40		571904	323,80						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
HIDRONIX MULTIPIPE	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	H 32		570480	186,32	
	H 14*		570310	168,10	
	H 16*		570320	168,10	
	H 18*		570340	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	U 14*		570760	174,33	
	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 26* ¹²⁾		570750	204,43	
	U 32		570785	204,43	
HIDRONIX UNICO	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	H 32		570480	186,32	
	H 14*		570310	168,10	
	H 16*		570320	168,10	
	H 18*		570340	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	U 14*		570760	174,33	
	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 26* ¹²⁾		570750	204,43	
	U 32		570785	204,43	
HITEC Sistema Multistrato	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
HITHERM-ISOTUBI NUMEPRESS	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	HITHERM HTpress	M 15		570110	154,61
		M 18		570120	154,61
M 22			570130	154,61	
M 28			570140	154,61	
M 35			570150	154,61	
M 42 (PR-3S)		Z2	572706 R	672,57	
M 54 (PR-3S)		Z2	572708 R	672,57	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 15 S (PR-2B)		Z8	574738 R	124,51	
M 18 S (PR-2B)		Z8	574740 R	124,51	
M 22 S (PR-2B)		Z8	574742 R	124,51	
M 28 S (PR-2B)		Z8	574744 R	124,51	
M 35 S (PR-2B)		Z8	574746 R	136,96	
HITHERM HTfire		M 15		570110	154,61
		M 18		570120	154,61
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
HITHERM HTair	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	Hopewell press fit system	M 15		570110	154,61
		M 18		570120	154,61
M 22			570130	154,61	
M 28			570140	154,61	
M 35			570150	154,61	
M 42 (PZ-4G)			570160	498,19	
M 54 (PZ-4G)			570170	498,19	
hp praski BAVARIA-press	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
ICMA Sempiter	TH 10*		570467	186,32	
	TH 12*		570452	186,32	
	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 17*		570462	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 10 S (PR-2B)**	Z8	574772 R	124,51	
	TH 12 S (PR-2B)**	Z8	574776 R	124,51	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 17 S (PR-2B)**	Z8	574784 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)	Z8	574798 R	136,96		
ICMA Sempigas	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 25*		570360	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	H 40 (PZ-4G)		570390	565,67	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
TH 32 S (PR-2B)	Z8	574798 R	136,96		
Idrosanitaria Bonomi Homegas	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 26* ¹²⁾		570750	204,43	
	U 32		570785	204,43	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	U 63 (PZ-S)		572365	645,58	
	Idrosanitaria Bonomi Idropress	TH 16*		570460	186,32
		TH 20*		570470	186,32
		TH 25*		570495	186,32
		TH 26*		570475	186,32
		TH 32		570480	186,32
		TH 16 S (PR-2B)**	Z8	574782 R	124,51
		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	Idrosanitaria Bonomi Idropress	TH 26 S (PR-2B)**	Z8	574794 R	124,51
TH 32 S (PR-2B)		Z8	574798 R	136,96	
TH 16*			570460	186,32	
TH 18*			570465	186,32	
TH 20*			570470	186,32	
TH 26*			570475	186,32	
TH 32			570480	186,32	
Idrosanitaria Bonomi Idropress	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€		
IDROSISTEMI Ta-Press	TH 16*		570460	186,32	IDROTRADE StormSTEEL ¹⁾	M 12		570100	154,61		
	TH 20*		570470	186,32		M 15		570110	154,61		
	TH 26*		570475	186,32		M 18		570120	154,61		
	TH 32		570480	186,32		M 22		570130	154,61		
	TH 40		570485	246,99		M 28		570140	154,61		
	TH 50 (PZ-S)		572400	645,58		M 35		570150	154,61		
	TH 63 (PZ-S)		572405	645,58		M 42 (PR-3S)	Z2	572706 R	672,57		
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		M 54 (PR-3S)	Z2	572708 R	672,57		
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58		
	TH 32 S (PR-2B)	Z8	574798 R	136,96		M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58		
	F 16*		570717	177,45		M 12 S (PR-2B)	Z8	574736 R	124,51		
	F 20*		570727	177,45		M 15 S (PR-2B)	Z8	574738 R	124,51		
	F 26*		570730	191,98		M 18 S (PR-2B)	Z8	574740 R	124,51		
	F 32		570735	191,98		M 22 S (PR-2B)	Z8	574742 R	124,51		
	F 16 S (PR-2B)**	Z8	574728 R	124,51		M 28 S (PR-2B)	Z8	574744 R	124,51		
	F 20 S (PR-2B)**	Z8	574730 R	124,51		M 35 S (PR-2B)	Z8	574746 R	136,96		
	F 26 S (PR-2B)**	Z8	574732 R	124,51		ILTA INOX/CHIBRO Pressfitting Cuni	M 15		570110	154,61	
	F 32 S (PR-2B)	Z8	574734 R	136,96			M 18		570120	154,61	
	Fz 40		570742	205,47			M 22		570130	154,61	
	Fz 50		570747	311,35			M 28		570140	154,61	
	F 63 (PZ-S)		572385	645,58			M 35		570150	154,61	
	H 16*		570320	168,10			M 42 (PR-3S)	Z2	572706 R	672,57	
	H 20*		570350	168,10			M 54 (PR-3S)	Z2	572708 R	672,57	
	H 26*		570370	168,10			M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	H 32		570380	168,10			M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	H 40 (PZ-46)		570390	565,67			M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	U 16*		570765	174,33			M 15 S (PR-2B)	Z8	574738 R	124,51	
	U 20*		570775	174,33			M 18 S (PR-2B)	Z8	574740 R	124,51	
	U 26* ¹²⁾		570750	204,43		M 22 S (PR-2B)	Z8	574742 R	124,51		
	U 32		570785	204,43		M 28 S (PR-2B)	Z8	574744 R	124,51		
	U 40		570790	249,07		M 35 S (PR-2B)	Z8	574746 R	136,96		
	U 50		570795	298,89		ILTA INOX/CHIBRO Pressfitting inox	M 15		570110	154,61	
	U 63 (PZ-S)		572365	645,58			M 18		570120	154,61	
	B 16*		570850	203,40			M 22		570130	154,61	
	B 20*		570860	203,40			M 28		570140	154,61	
	B 26		570870	224,16			M 35		570150	154,61	
	B 32		570880	224,16			M 42 (PR-3S)	Z2	572706 R	672,57	
	IDROTRADE Storm Multipinza	H 16*		570320			168,10	M 54 (PR-3S)	Z2	572708 R	672,57
		H 20*		570350			168,10	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
		H 26*		570370			168,10	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
		H 32		570380			168,10	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
TH 16*			570460	186,32	M 15 S (PR-2B)		Z8	574738 R	124,51		
TH 20*			570470	186,32	M 18 S (PR-2B)		Z8	574740 R	124,51		
TH 26*			570475	186,32	M 22 S (PR-2B)	Z8	574742 R	124,51			
TH 32			570480	186,32	M 28 S (PR-2B)	Z8	574744 R	124,51			
THL 32			570487	186,32	M 35 S (PR-2B)	Z8	574746 R	136,96			
TH 40			570485	246,99	Instantor Press System	TH 16*		570460	186,32		
TH 50 (PZ-S)			572400	645,58		TH 20*		570470	186,32		
TH 63 (PZ-S)			572405	645,58		TH 26*		570475	186,32		
TH 16 S (PR-2B)**		Z8	574782 R	124,51		TH 32		570480	186,32		
TH 20 S (PR-2B)**		Z8	574788 R	124,51		TH 16 S (PR-2B)**	Z8	574782 R	124,51		
TH 26 S (PR-2B)**		Z8	574794 R	124,51		TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 32 S (PR-2B)		Z8	574798 R	136,96		TH 26 S (PR-2B)**	Z8	574794 R	124,51		
U 16*			570765	174,33		TH 32 S (PR-2B)	Z8	574798 R	136,96		
U 20*			570775	174,33		Instantor Copper Press Imperial	VI 1/2" S (PR-2B)	Z8	574850 R	124,51	
IDROTRADE StormPRES ¹⁾	M 15		570110	154,61			VI 3/4" S (PR-2B)	Z8	574852 R	124,51	
	M 18		570120	154,61			VI 1" S (PR-2B)	Z8	574854 R	124,51	
	M 22		570130	154,61			Instantor Copper Press Metric	M 15		570110	154,61
	M 28		570140	154,61	M 22				570130	154,61	
	M 35		570150	154,61	M 28				570140	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	M 15 S (PR-2B)			Z8	574738 R	124,51	
	M 54 (PR-3S)	Z2	572708 R	672,57	M 22 S (PR-2B)			Z8	574742 R	124,51	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	M 28 S (PR-2B)			Z8	574744 R	124,51	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	Instantor Copper Press Imperial			M 15		570110	154,61
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58				M 22		570130	154,61
	M 15 S (PR-2B)	Z8	574738 R	124,51				M 28		570140	154,61
	M 18 S (PR-2B)	Z8	574740 R	124,51		M 15 S (PR-2B)		Z8	574738 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51	M 22 S (PR-2B)		Z8		574742 R	124,51		
M 28 S (PR-2B)	Z8	574744 R	124,51	M 28 S (PR-2B)		Z8		574744 R	124,51		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
IPA IPANA Press	TH 10*		570467	186,32	
	TH 11,6*		570482	186,32	
	TH 12*		570452	186,32	
	TH 14*		570455	186,32	
	TH 15*		570457	186,32	
	TH 16*		570460	186,32	
	TH 17*		570462	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 22*		570472	186,32	
	TH 25*		570495	186,32	
	TH 26*		570475	186,32	
	TH 28		570477	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	THz 75 (PR-3B)	Z4	572829 R	609,25	
	TH 10 S (PR-2B)**	Z8	574772 R	124,51	
	TH 11,6 S (PR-2B)**	Z8	574774 R	124,51	
	TH 12 S (PR-2B)**	Z8	574776 R	124,51	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 15 S (PR-2B)**	Z8	574780 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 17 S (PR-2B)**	Z8	574784 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 22 S (PR-2B)**	Z8	574790 R	124,51	
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 28 S (PR-2B)**	Z8	574796 R	136,96	
	TH 32 S (PR-2B)**	Z8	574798 R	136,96	
	IPA THu IPANA Press	TH 16*		570460	186,32
		TH 20*		570470	186,32
		TH 26*		570475	186,32
TH 32			570480	186,32	
TH 40			570485	246,99	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
TH 26 S (PR-2B)**		Z8	574794 R	124,51	
TH 32 S (PR-2B)		Z8	574798 R	136,96	
IPALPEX (Industrie du Plastique et Accessoires)	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	THL 32		570487	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
TH 63 (PZ-S)		572405	645,58		
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18*		572600	194,05	
	PF 22*		571980	209,62	
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K16/P18*		572600	194,05	
	K/20*		572605	194,05	
	K/25*		572610	194,05	
	K32		572615	194,05	
	K1/40		572620	194,05	
K1/50		572625	318,61		
IPLEX PIPELINES AUSTRALIA Iplex K2	K16/P18*		572600	194,05	
	K/20*		572605	194,05	
	K/25*		572610	194,05	
ISOLTUBEX ISOLPEX IPERT	RFz 16*		571325	194,05	
	RFz 20*		571330	194,05	
	RFz 25		571337	213,78	
	RFz 32		571342	213,78	
ISOLTUBEX Multicapra	RFz 16*		571325	194,05	
	RFz 18*		571327	194,05	
	RFz 20*		571330	194,05	
	RFz 25		571337	213,78	
	RFz 32		571342	213,78	
	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	U 63 (PZ-S)		572365	645,58	
	ISOLTUBEX Multicapra GAS	RFz 16*		571325	194,05
		RFz 20*		571330	194,05
RFz 25			571337	213,78	
RFz 32			571342	213,78	
ISOLTUBEX Multicapra-PPSU	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
ISOTUBI NUMEPRESS	M 15		570110	154,61	
	M 18 ¹⁾		570120	154,61	
	M 22		570130	154,61	
	M 28 ¹⁾		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
IVAR ALPEX-GAS	B 20		570860	203,40
	B 26		570870	224,16
	B 32		570880	224,16
IVAR Ivar-Press	B 14*		570845	203,40
	B 16*		570850	203,40
	B 18*		570855	203,40
	B 20*		570860	203,40
	B 26		570870	224,16
	B 32		570880	224,16
	Fz 40		570742	205,47
	Fz 50		570747	311,35
	F 63 (PZ-S)		572385	645,58
	IVAR MULTI PRESS GAS ITALIA	TH 16*		570460
TH 20*			570470	186,32
TH 26*			570475	186,32
IVAR Multi Press MP	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	U 16*		570765	174,33
	U 20*		570775	174,33
	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
TH 25 S (PR-2B)**	Z8	574792 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51	
TH 32 S (PR-2B)	Z8	574798 R	136,96	
F 16*		570717	177,45	
F 18*		570720	177,45	
F 20*		570727	177,45	
F 26*		570730	191,98	
F 32		570735	191,98	
Fz 40		570742	205,47	
Fz 50		570747	311,35	
F 63 (PZ-S)		572385	645,58	
F 16 S (PR-2B)**	Z8	574728 R	124,51	
F 20 S (PR-2B)**	Z8	574730 R	124,51	
F 26 S (PR-2B)**	Z8	574732 R	124,51	
F 32 S (PR-2B)	Z8	574734 R	136,96	
H 16*		570320	168,10	
H 18*		570340	168,10	
H 20*		570350	168,10	
H 25*		570360	168,10	
H 26*		570370	168,10	
H 32		570380	168,10	
H 40 (PZ-46)		570390	565,67	
U 16*		570765	174,33	
U 18*		570770	174,33	
U 20*		570775	174,33	
U 25*		570780	174,33	
U 26* ¹²⁾		570750	204,43	
U 32		570785	204,43	
U 40		570790	249,07	
U 50		570795	298,89	
U 63 (PZ-S)		572365	645,58	
B 16*		570850	203,40	
B 18*		570855	203,40	
B 20*		570860	203,40	
B 26		570870	224,16	
B 32		570880	224,16	
IVAR Multi Press Leak (MPL)	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	F 16*		570717	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51
F 32 S (PR-2B)	Z8	574734 R	136,96	
H 16*		570320	168,10	
H 20*		570350	168,10	
H 26*		570370	168,10	
H 32		570380	168,10	
U 16*		570765	174,33	
U 20*		570775	174,33	
U 26* ¹²⁾		570750	204,43	
U 32		570785	204,43	
B 16*		570850	203,40	
B 20*		570860	203,40	
B 26		570870	224,16	
B 32		570880	224,16	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460	186,32	IVT PRIPRESS	TH 16*		570460	186,32	
	TH 20*		570470	186,32		TH 20*		570470	186,32	
	TH 26*		570475	186,32		TH 26*		570475	186,32	
	TH 32		570480	186,32		TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		TH 40		570485	246,99	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96		TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	F 16*		570717	177,45		TH 32 S (PR-2B)	Z8	574798 R	136,96	
	F 20*		570727	177,45		J				
	F 26*		570730	191,98		Jäger - Aquatec	H 14*		570310	168,10
	F 32		570735	191,98		Aquapress H	H 16*		570320	168,10
	F 16 S (PR-2B)**	Z8	574728 R	124,51			H 17*		570330	168,10
	F 20 S (PR-2B)**	Z8	574730 R	124,51			H 18*		570340	168,10
	F 26 S (PR-2B)**	Z8	574732 R	124,51			H 20*		570350	168,10
	F 32 S (PR-2B)	Z8	574734 R	136,96			H 26*		570370	168,10
	H 16*		570320	168,10			H 32		570380	168,10
	H 20*		570350	168,10		U 40		570790	249,07	
	H 26*		570370	168,10		U 50		570795	298,89	
	H 32		570380	168,10		U 63 (PZ-S)		572365	645,58	
	U 16*		570765	174,33	Jäger - Aquatec	M 15		570110	154,61	
	U 20*		570775	174,33	C-Stahl - Press Typ M	M 18		570120	154,61	
	U 26* ¹²⁾		570750	204,43		M 22		570130	154,61	
	U 32		570785	204,43		M 28		570140	154,61	
	B 16*		570850	203,40		M 35		570150	154,61	
	B 20*		570860	203,40		M 42 (PR-3S)	Z2	572706 R	672,57	
	B 26		570870	224,16		M 54 (PR-3S)	Z2	572708 R	672,57	
	B 32		570880	224,16		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	IVAR	TH 16*		570460	186,32	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	Plastic Multi Press	TH 20*		570470	186,32	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	PMP	TH 25*		570495	186,32	M 15 S (PR-2B)	Z8	574738 R	124,51	
		TH 26*		570475	186,32	M 18 S (PR-2B)	Z8	574740 R	124,51	
	TH 32		570480	186,32	M 22 S (PR-2B)	Z8	574742 R	124,51		
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	M 28 S (PR-2B)	Z8	574744 R	124,51		
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	M 35 S (PR-2B)	Z8	574746 R	136,96		
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	Jäger - Aquatec	M 15	570110	154,61		
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	Edelstahl -	M 18	570120	154,61		
	TH 32 S (PR-2B)	Z8	574798 R	136,96	Press Typ M	M 22	570130	154,61		
	F 16*		570717	177,45		M 28	570140	154,61		
	F 20*		570727	177,45		M 35	570150	154,61		
	F 26*		570730	191,98		M 42 (PR-3S)	Z2	572706 R		
	F 32		570735	191,98		M 54 (PR-3S)	Z2	572708 R		
	F 16 S (PR-2B)**	Z8	574728 R	124,51		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R		
	F 20 S (PR-2B)**	Z8	574730 R	124,51		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R		
	F 26 S (PR-2B)**	Z8	574732 R	124,51		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R		
	F 32 S (PR-2B)	Z8	574734 R	136,96		M 15 S (PR-2B)	Z8	574738 R		
	H 16*		570320	168,10		M 18 S (PR-2B)	Z8	574740 R		
	H 20*		570350	168,10		M 22 S (PR-2B)	Z8	574742 R		
	H 25*		570360	168,10		M 28 S (PR-2B)	Z8	574744 R		
	H 26*		570370	168,10		M 35 S (PR-2B)	Z8	574746 R		
	H 32		570380	168,10	Jäger - Aquatec	V 15	570115	154,61		
	U 16*		570765	174,33	Kupfer -	V 18	570125	154,61		
	U 20*		570775	174,33	Press Typ V	V 22	570135	154,61		
	U 25*		570780	174,33		V 28	570145	154,61		
	U 26* ¹²⁾		570750	204,43		V 35	570155	154,61		
	U 32		570785	204,43		V 42	570165	360,13		
	B 16*		570850	203,40		V 42 (PR-2B)	Z2	572850 R		
	B 20*		570860	203,40		V 54	570175	370,51		
	B 26		570870	224,16		V 54 (PR-2B)	Z2	572851 R		
	B 32		570880	224,16		V 15 S (PR-2B)	Z8	574752 R		
IVT Edelstahl- Presssystem	M 15		570110	154,61		V 18 S (PR-2B)	Z8	574756 R		
	M 18 ¹⁾		570120	154,61		V 22 S (PR-2B)	Z8	574758 R		
	M 22		570130	154,61		V 28 S (PR-2B)	Z8	574760 R		
	M 28 ¹⁾		570140	154,61		V 35 S (PR-2B)	Z8	574762 R		
	M 35		570150	154,61						
	M 42 (PR-3S)	Z2	572706 R	672,57						
	M 54 (PR-3S)	Z2	572708 R	672,57						
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47						
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58						
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58						
	M 15 S (PR-2B)	Z8	574738 R	124,51						
	M 18 S (PR-2B)	Z8	574740 R	124,51						
	M 22 S (PR-2B)	Z8	574742 R	124,51						
	M 28 S (PR-2B)	Z8	574744 R	124,51						
	M 35 S (PR-2B)	Z8	574746 R	136,96						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Jansen AG JANSEN COMISA	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)**	Z8	574798 R	136,96	
	Jaraflex- Presssystem	TH 14*		570455	186,32
		TH 16*		570460	186,32
		TH 17*		570462	186,32
		TH 18*		570465	186,32
TH 20*			570470	186,32	
TH 25*			570495	186,32	
TH 26*			570475	186,32	
TH 32			570480	186,32	
TH 40			570485	246,99	
TH 50 (PZ-S)			572400	645,58	
TH 63 (PZ-S)			572405	645,58	
TH 14 S (PR-2B)**		Z8	574778 R	124,51	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 17 S (PR-2B)**		Z8	574784 R	124,51	
TH 18 S (PR-2B)**		Z8	574786 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
TH 25 S (PR-2B)**		Z8	574792 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)**	Z8	574798 R	136,96		
JUNGWOO JWPress	VUS 1/2" (OD 15,9 mm)		571770	186,79	
	VUS 3/4" (OD 22,2 mm)		571775	186,79	
	VUS 1" (OD 28,6 mm)		571780	186,79	
	VUS 1 1/4" (OD 34,9 mm)		571785	186,79	
	VUS 1 1/2" (OD 41,3 mm)		571790	360,13	
	VUS 2" (OD 54,0 mm)		571795	370,51	
	VUSFz 2 1/4" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25	
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58		

K

KAN KAN-therm Press LBP	U 14*		570760	174,33	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 26* ⁽¹²⁾		570750	204,43	
	U 32		570785	204,43	
	U 40		570790	249,07	
	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)**	Z8	574798 R	136,96	
	KAN KAN-therm Inox	M 15		570110	154,61
		M 18 ⁽¹⁾		570120	154,61
		M 22		570130	154,61
M 28 ⁽¹⁾			570140	154,61	
M 35			570150	154,61	
M 42 (PZ-4G)			570160	498,19	
M 54 (PZ-4G)			570170	498,19	
M 42 (PR-3S)		Z2	572706 R	672,57	
M 54 (PR-3S)		Z2	572708 R	672,57	
M 76,1 XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47	
M 88,9 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58	
M 15 S (PR-2B)		Z8	574738 R	124,51	
M 18 S (PR-2B)		Z8	574740 R	124,51	
M 22 S (PR-2B)		Z8	574742 R	124,51	
M 28 S (PR-2B)		Z8	574744 R	124,51	
M 35 S (PR-2B)	Z8	574746 R	136,96		
KAN KAN-therm Steel	M 12		570100	154,61	
	M 15		570110	154,61	
	M 18 ⁽¹⁾		570120	154,61	
	M 22		570130	154,61	
	M 28 ⁽¹⁾		570140	154,61	
	M 35		570150	154,61	
	M 42 (PZ-4G)		570160	498,19	
	M 54 (PZ-4G)		570170	498,19	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	XP 66,7 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579108 R	1.161,47	
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58	
	M 12 S (PR-2B)	Z8	574736 R	124,51	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
KAN KAN-therm UltraPRESS	U 14*		570760	174,33
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 26* ⁽¹²⁾		570750	204,43
	U 32		570785	204,43
	U 40		570790	249,07
	TH 14*		570455	186,32
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
TH 16 S (PR-2B)**	Z8	574782 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 25 S (PR-2B)**	Z8	574792 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51	
TH 32 S (PR-2B)**	Z8	574798 R	136,96	
KE KELIT COPPERFIX Kupfer	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
KE KELIT KELIT KELOX	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	Z4	572837 R	733,81
U 75 (PR-3B)	Z4	572828 R	645,58	
KE KELIT KELOX-PPSU-W	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	Z4	572837 R	733,81
U 75 (PR-3B)	Z4	572828 R	645,58	
KE KELIT KELOX-ULTRAX	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	Z4	572837 R	733,81
U 75 (PR-3B)	Z4	572828 R	645,58	
KE KELIT KELOX-ULTRAX-W	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	Z4	572837 R	733,81
U 75 (PR-3B)	Z4	572828 R	645,58	
KE KELIT KELOX-WINDOW-X	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	Z4	572837 R	733,81
U 75 (PR-3B)	Z4	572828 R	645,58	
KE KELIT steelFIX C-Stahl	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
KE KELIT steelFIX Edelstahl	M 15		570110	154,61	KISAN Kistal C	M 15		570110	154,61
	M 18		570120	154,61		M 18		570120	154,61
	M 22		570130	154,61		M 22		570130	154,61
	M 28		570140	154,61		M 28		570140	154,61
	M 35		570150	154,61		M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57		M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57		M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51		M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51		M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51		M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51		M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96		M 35 S (PR-2B)	Z8	574746 R	136,96
KEMBLA KemPress (AUS)	VAU 15 (OD 12,7 mm)		572687	159,80	KISAN Kistal Inox	M 15		570110	154,61
	VAU 20 (OD 19,1 mm)		572689	159,80		M 18		570120	154,61
	VAU 25 (OD 25,4 mm)		572691	159,80		M 22		570130	154,61
	VAU 32 (OD 31,8 mm)		572693	168,10		M 28		570140	154,61
	VAU 40 (OD 38,1 mm)		572695	249,07		M 35		570150	154,61
	VAU 50 (OD 50,8 mm)		572697	441,10		M 42 (PR-3S)	Z2	572706 R	672,57
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)		572687	159,80	M 54 (PR-3S)	Z2	572708 R	672,57	
	VAU 20 (OD 19,1 mm)		572689	159,80	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47	
	VAU 25 (OD 25,4 mm)		572691	159,80	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58	
	VAU 32 (OD 31,8 mm)		572693	168,10	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58	
	VAU 40 (OD 38,1 mm)		572695	249,07	M 15 S (PR-2B)	Z8	574738 R	124,51	
	VAU 50 (OD 50,8 mm)		572697	441,10	M 18 S (PR-2B)	Z8	574740 R	124,51	
KISAN Kisan KD	KI 16*		571360	197,17	M 22 S (PR-2B)	Z8	574742 R	124,51	
	KI 20*		571370	197,17	M 28 S (PR-2B)	Z8	574744 R	124,51	
	KI 25*		571375	197,17	M 35 S (PR-2B)	Z8	574746 R	136,96	
	TH 16*		570460	186,32	L				
	TH 20*		570470	186,32	LEGEND-PRESS	VUS ½" (OD 15,9 mm)		571770	186,79
	TH 25*		570495	186,32	press fitting	VUS ¾" (OD 22,2 mm)		571775	186,79
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	system	VUS 1" (OD 28,6 mm)		571780	186,79
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		VUS 1¼" (OD 34,9 mm)		571785	186,79
	TH 25 S (PR-2B)**	Z8	574792 R	124,51		VUS 1½" (OD 41,3 mm)		571790	360,13
			574798 R	136,96		VUS 2" (OD 54,0 mm)		571795	370,51
KISAN Kisan WL	KI 16*		571360	197,17		VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25
	KI 20*		571370	197,17		VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25
	KI 25*		571375	197,17		VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58
	KI 32		571380	265,68	LK Systems	V 12		570107	154,61
	TH 16*		570460	186,32	LK >B-Press	V 15		570115	154,61
	TH 20*		570470	186,32		V 18		570125	154,61
	TH 25*		570495	186,32		V 22		570135	154,61
	TH 32		570480	186,32		V 28		570145	154,61
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		V 35		570155	154,61
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		V 42		570165	360,13
KISAN Kisan WM	KI 16*		571360	197,17		V 54		570175	370,51
	KI 20*		571370	197,17		V 12 S (PR-2B)	Z8	574748 R	124,51
	KI 25*		571375	197,17		V 15 S (PR-2B)	Z8	574752 R	124,51
	KI 32		571380	265,68		V 18 S (PR-2B)	Z8	574756 R	124,51
	TH 16*		570460	186,32		V 22 S (PR-2B)	Z8	574758 R	124,51
	TH 20*		570470	186,32		V 28 S (PR-2B)	Z8	574760 R	124,51
	TH 25*		570495	186,32		V 35 S (PR-2B)	Z8	574762 R	136,96
	TH 32		570480	186,32	LK Systems	V 12		570107	154,61
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	LK >B-Press	V 15		570115	154,61
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	Elförsinkat	V 18		570125	154,61
KISAN Kisan WR	U 20*		570775	174,33		V 22		570135	154,61
	U 25*		570780	174,33		V 28		570145	154,61
	U 32		570785	204,43		V 35		570155	154,61
	U 40		570790	249,07		V 42		570165	360,13
	U 50		570795	298,89		V 54		570175	370,51
	U 63 (PZ-S)		572365	645,58		V 12 S (PR-2B)	Z8	574748 R	124,51
	U 75 (PR-3B)		572828 R	645,58		V 15 S (PR-2B)	Z8	574752 R	124,51
	TH 20*		570470	186,32		V 18 S (PR-2B)	Z8	574756 R	124,51
	TH 25*		570495	186,32		V 22 S (PR-2B)	Z8	574758 R	124,51
	TH 32		570480	186,32		V 28 S (PR-2B)	Z8	574760 R	124,51
	TH 40		570485	246,99		V 35 S (PR-2B)	Z8	574762 R	136,96
	TH 50 (PZ-S)		572400	645,58					
	TH 63 (PZ-S)		572405	645,58					
	TH 20 S (PR-2B)**	Z8	574788 R	124,51					
	TH 25 S (PR-2B)**	Z8	574792 R	124,51					
TH 32 S (PR-2B)	Z8	574798 R	136,96						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC, see page 188.

4) Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

8) For making press joints for operating pressure ≤ PN 10.

9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

11) Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
LK Systems LK >B<-Press Gas	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 54		570175	370,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
LK Systems	TH 16*		570460	186,32
LK Universal	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58

M

MAINCOR MAINPRESS	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	Z4	572837 R	733,81
MAINCOR MAINFLOR	U 16*		570765	174,33
	U 20*		570775	174,33
Mair Heiztechnik M-Press	H 11,5*		570315	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
Ma.s.ter System PRESSMASTER	TH 14*		570455	186,32
	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 14*		570310	168,10
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	U 14*		570760	174,33
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
U 25*		570780	174,33	
U 32		570785	204,43	
U 40		570790	249,07	
U 50		570795	298,89	
U 63 (PR-3B)	Z4	572837 R	733,81	
U 63 (PZ-S)		572365	645,58	
Meier Tobler Metalplast - Stramax Serie MM	H 16*		570320	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 32		570380	168,10
	Rfz 16*		571325	194,05
	Rfz 20*		571330	194,05
	Rfz 25		571335	194,05
	Rfz 32		571340	194,05
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	Z4	572837 R	733,81

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
METALGRUP Permatubo	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	U 63 (PZ-S)		572365	645,58	
	METALGRUP PexGrup	Rfz 16*		571325	194,05
Rfz 20*			571330	194,05	
Rfz 25			571335	194,05	
	Rfz 32		571340	194,05	
METALGRUP MultiGrup	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
Mueller Streamline	VUS ½" (OD 15,9 mm)		571770	186,79	
PRS Copper Press	VUS ¾" (OD 22,2 mm)		571775	186,79	
	VUS 1" (OD 28,6 mm)		571780	186,79	
	VUS 1¼" (OD 34,9 mm)		571785	186,79	
	VUS 1½" (OD 41,3 mm)		571790	360,13	
	VUS 2" (OD 54,0 mm)		571795	370,51	
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58	
MULTITHERM PRESSSYSTEM	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	THz 75 (PR-3B)	Z4	572829 R	609,25	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
Multicap Industrial AIS PEX	Rfz 16*		571325	194,05	
	Rfz 20*		571330	194,05	
	Rfz 25		571335	194,05	
	Rfz 32		571340	194,05	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
	Multicap Industrial AIS XPRT	H 16*		570320	168,10
		H 20*		570350	168,10
		H 25*		570360	168,10
		H 26*		570370	168,10
H 32			570380	168,10	
Rfz 16*			571325	194,05	
Rfz 20*			571330	194,05	
Rfz 25			571335	194,05	
Rfz 32			571340	194,05	
TH 16*			570460	186,32	
TH 20*			570470	186,32	
TH 25*			570495	186,32	
TH 26*		570475	186,32		
TH 32		570480	186,32		
TH 40		570485	246,99		
TH 50 (PZ-S)		572400	645,58		
TH 63 (PZ-S)		572405	645,58		
THz 75 (PR-3B)	Z4	572829 R	609,25		
TH 16 S (PR-2B)**	Z8	574782 R	124,51		
TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 25 S (PR-2B)**	Z8	574792 R	124,51		
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)	Z8	574798 R	136,96		
U 16*		570765	174,33		
U 20*		570775	174,33		
U 25*		570780	174,33		
U 32		570785	204,43		
U 40		570790	249,07		
U 50		570795	298,89		
U 63 (PZ-S)		572365	645,58		
U 63 (PR-3B)	Z4	572837 R	733,81		
U 75 (PR-3B)	Z4	572828 R	645,58		
Multicap Industrial multitubo systems MC	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PZ-S)		572365	645,58	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	U 75 (PR-3B)	Z4	572828 R	645,58	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
Multicap Industrial multitubo systems MM	H 16*		570320	168,10	NUPI Industrie Italiane Multinupi	B 16*		570850	203,40
	H 20*		570350	168,10		B 18*		570855	203,40
	H 25*		570360	168,10		B 20*		570860	203,40
	H 26*		570370	168,10		B 26		570870	224,16
	H 32		570380	168,10		B 32		570880	224,16
	RFz 16*		571325	194,05		F 16*		570717	177,45
	RFz 20*		571330	194,05		F 18*		570720	177,45
	RFz 25		571335	194,05		F 20*		570727	177,45
	RFz 32		571340	194,05		F 26*		570730	191,98
	TH 16*		570460	186,32		F 32		570735	191,98
	TH 20*		570470	186,32		F 16 S (PR-2B)**	Z8	574728 R	124,51
	TH 25*		570495	186,32		F 20 S (PR-2B)**	Z8	574730 R	124,51
	TH 26*		570475	186,32		F 26 S (PR-2B)**	Z8	574732 R	124,51
	TH 32		570480	186,32		F 32 S (PR-2B)	Z8	574734 R	136,96
	TH 40		570485	246,99		H 16*		570320	168,10
	TH 50 (PZ-S)		572400	645,58		H 18*		570340	168,10
	TH 63 (PZ-S)		572405	645,58		H 20*		570350	168,10
	THz 75 (PR-3B)	Z4	572829 R	609,25		H 25*		570360	168,10
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		H 26*		570370	168,10
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		H 32		570380	168,10
	TH 25 S (PR-2B)**	Z8	574792 R	124,51		TH 16*		570460	186,32
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		TH 18*		570465	186,32
	TH 32 S (PR-2B)	Z8	574798 R	136,96		TH 20*		570470	186,32
	U 16*		570765	174,33		TH 25*		570495	186,32
	U 20*		570775	174,33		TH 26*		570475	186,32
	U 25*		570780	174,33		TH 32		570480	186,32
	U 32		570785	204,43		TH 40		570485	246,99
	U 40		570790	249,07		TH 50 (PZ-S)		572400	645,58
	U 50		570795	298,89		TH 63 (PZ-S)		572405	645,58
	U 63 (PZ-S)		572365	645,58		TH 16 S (PR-2B)**	Z8	574782 R	124,51
	U 63 (PR-3B)	Z4	572837 R	733,81		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	U 75 (PR-3B)	Z4	572828 R	645,58		TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 16*		570460	186,32		TH 32 S (PR-2B)	Z8	574798 R	136,96
	TH 20*		570470	186,32		U 14*		570760	174,33
	TH 26*		570475	186,32		U 16*		570765	174,33
	TH 32		570480	186,32		U 18*		570770	174,33
	TH 40		570485	246,99		U 20*		570775	174,33
	TH 50 (PZ-S)		572400	645,58		U 25*		570780	174,33
TH 63 (PZ-S)		572405	645,58	U 26* ¹²⁾		570750	204,43		
TH 16 S (PR-2B)**	Z8	574782 R	124,51	U 32		570785	204,43		
TH 20 S (PR-2B)**	Z8	574788 R	124,51	U 40		570790	249,07		
TH 26 S (PR-2B)**	Z8	574794 R	124,51	U 50		570795	298,89		
TH 32 S (PR-2B)	Z8	574798 R	136,96	U 63 (PR-3B)	Z4	572837 R	733,81		
N					U 63 (PZ-S)		572365	645,58	
NEUTHERM	H 16*		570320	168,10	Nussbaum	VMP ¾" (OD 12,2 mm)		571740	214,81
MEKUPRESS-HT	H 20*		570350	168,10	Optifitt-Press	VMP ½" G (OD 21,3 mm)		571766 R	214,81
	H 26*		570370	168,10		VMPz ¾" (OD 26,9 mm)		571764	214,81
	H 32		570380	168,10		VMPz 1" (OD 33,7 mm)		571767	214,81
	H 40 (PZ-4G)		570390	565,67		VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75
	U 40		570790	249,07		VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844 R	479,50
NIBCO	VUS ½" (OD 15,9 mm)		571770	186,79		VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	479,50
Press System	VUS ¾" (OD 22,2 mm)		571775	186,79	Nussbaum	VRX 16		571750	196,13
Copper	VUS 1" (OD 28,6 mm)		571780	186,79	Optiflex-Flowpress	VRX 20		571752	196,13
	VUS 1¼" (OD 34,9 mm)		571785	186,79		VRX 25		571754	214,81
	VUS 1½" (OD 41,3 mm)		571790	360,13		VRX 32		571756	214,81
	VUS 2" (OD 54,0 mm)		571795	370,51		VRX 40		571758	298,89
NICOLL FLUXO	TH 16*		570460	186,32		VRX 50		571760	348,72
	TH 20*		570470	186,32		VRX 63		571797	560,47
	TH 26*		570475	186,32	Nussbaum	V 15		570115	154,61
	TH 32		570480	186,32	Optipress	V 18		570125	154,61
	TH 40		570485	246,99	Aquaplus	V 22		570135	154,61
	TH 50 (PZ-S)		572400	645,58		V 28		570145	154,61
	TH 63 (PZ-S)		572405	645,58		V 35		570155	154,61
	THz 75 (PR-3B)	Z4	572829 R	609,25		V 42		570165	360,13
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		V 42 (PR-2B)	Z2	572850 R	322,77
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		V 54		570175	370,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		V 54 (PR-2B)	Z2	572851 R	348,72
	TH 32 S (PR-2B)	Z8	574798 R	136,96		Vfz 64,0 (PR-3B)	Z5	572815 R	609,25
						Vfz 76,1 (PR-3B)	Z5	572816 R	609,25
						Vfz 88,9 (PR-3B)	Z5	572817 R	645,58
						Vfz 108,0 (PR-3B)	Z5	572818 R	645,58
						V 15 S (PR-2B)	Z8	574752 R	124,51
						V 18 S (PR-2B)	Z8	574756 R	124,51
						V 22 S (PR-2B)	Z8	574758 R	124,51
						V 28 S (PR-2B)	Z8	574760 R	124,51
						V 35 S (PR-2B)	Z8	574762 R	136,96

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Nussbaum Optipress-Gaz	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	Vfz 64,0 (PR-3B)	Z5	572815 R	609,25
	Vfz 76,1 (PR-3B)	Z5	572816 R	609,25
	Vfz 88,9 (PR-3B)	Z5	572817 R	645,58
	Vfz 108,0 (PR-3B)	Z5	572818 R	645,58
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
Nussbaum Optipress-Therm	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	Vfz 64,0 (PR-3B)	Z5	572815 R	609,25
	Vfz 76,1 (PR-3B)	Z5	572816 R	609,25
	Vfz 88,9 (PR-3B)	Z5	572817 R	645,58
	Vfz 108,0 (PR-3B)	Z5	572818 R	645,58
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
V 28 S (PR-2B)	Z8	574760 R	124,51	
V 35 S (PR-2B)	Z8	574762 R	136,96	
O				
Oventrop Cofit P	H 16 A*		570620	214,81
	H 20 A*		570650	214,81
	H 26 A*		570670	214,81
	H 32 A		570680	214,81
	H 40 A		570690	373,63
	U 50		570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
Oventrop Cofit PD	H 16 A*		570620	214,81
	H 20 A*		570650	214,81
	H 26 A*		570670	214,81
Oventrop Cofit PDK	H 16 A*		570620	214,81
	H 20 A*		570650	214,81
Oventrop Cofit PD-HT	H 16 A*		570620	214,81
	H 20 A*		570650	214,81
	H 25 A*		570660	214,81
Oventrop Cofit PDK-HT	H 16 A*		570620	214,81
	H 20 A*		570650	214,81
P				
PBTab SERTIPRESS	Rfz 12*		571320	194,05
	Rfz 16*		571325	194,05
	Rfz 20*		571330	194,05
	Rfz 25		571335	194,05
PBTab SERTI-STEEL	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
M 35 S (PR-2B)	Z8	574746 R	136,96	
Pegler Yorkshire	> Aalberts integrated piping systems			
PERFEXIM PERFEKT SYSTEM	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
PERFEXIM PERFEKT SYSTEM PLUS	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
TH 16 S (PR-2B)**	Z8	574782 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 25 S (PR-2B)**	Z8	574792 R	124,51	
TH 32 S (PR-2B)	Z8	574798 R	136,96	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
PERFILTUBO PERFILALUPEX	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	U 63 (PZ-S)		572365	645,58	
	U 75 (PR-3B)	Z4	572828 R	645,58	
PERFILTUBO PERFILPRESS	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
M 22 S (PR-2B)	Z8	574742 R	124,51		
M 28 S (PR-2B)	Z8	574744 R	124,51		
M 35 S (PR-2B)	Z8	574746 R	136,96		
PEXTUBE PexTube	Rfz 16*		571325	194,05	
	Rfz 20*		571330	194,05	
	Rfz 25		571337	213,78	
Rfz 32		571342	213,78		
Pipelife C-PRESS	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 15 S (PR-2B)	Z8	574738 R	124,51		
M 18 S (PR-2B)	Z8	574740 R	124,51		
M 22 S (PR-2B)	Z8	574742 R	124,51		
M 28 S (PR-2B)	Z8	574744 R	124,51		
M 35 S (PR-2B)	Z8	574746 R	136,96		
Pipelife RADOPRESS	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)	Z8	574798 R	136,96		
Pipetec Connect	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
TH 32 S (PR-2B)	Z8	574798 R	136,96		
PLASTICA ALFA Multypex	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	PLASTICA ALFA Multypex Air	TH 16*		570460	186,32
		TH 20*		570470	186,32
TH 26*			570475	186,32	
TH 32			570480	186,32	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
TH 26 S (PR-2B)**		Z8	574794 R	124,51	
TH 32 S (PR-2B)		Z8	574798 R	136,96	
PLASTICA ALFA Multypexalfa Gas protek		TH 16*		570460	186,32
		TH 20*		570470	186,32
	TH 26*		570475	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
PLASTICA ALFA Multypex Plus	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)	Z8	574798 R	136,96		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
PLASTICA ALFA Multypex Thermo	TH 16*		570460	186,32	POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110	154,61
	TH 20*		570470	186,32		M 18		570120	154,61
	TH 26*		570475	186,32		M 22		570130	154,61
	TH 32		570480	186,32		M 28		570140	154,61
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		M 35		570150	154,61
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		POLYSAN- C-Stahl-Press- System M	M 42 (PR-3S)	Z2	572706 R
TH 26 S (PR-2B)**	Z8	574794 R	124,51	M 54 (PR-3S)	Z2		572708 R	672,57	
TH 32 S (PR-2B)	Z8	574798 R	136,96	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101 R	1.161,47	
				M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110 R	1.355,58	
				M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579111 R	1.355,58	
				M 15 S (PR-2B)	Z8		574738 R	124,51	
PLASTICA ALFA Multypex Thermo Plus	TH 16*		570460	186,32	M 18 S (PR-2B)	Z8	574740 R	124,51	
	TH 20*		570470	186,32	M 22 S (PR-2B)	Z8	574742 R	124,51	
	TH 26*		570475	186,32	M 28 S (PR-2B)	Z8	574744 R	124,51	
	TH 32		570480	186,32	M 35 S (PR-2B)	Z8	574746 R	136,96	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51					
	TH 20 S (PR-2B)**	Z8	574788 R	124,51					
PLÁSTICOS FERRO FERROPLAST GPF MULT Pressfitting MULTICAPA	U 16*		570765	174,33	POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110	154,61
	U 20*		570775	174,33		M 18		570120	154,61
	U 25*		570780	174,33		M 22		570130	154,61
	U 32		570785	204,43		M 28		570140	154,61
	U 16*		570765	174,33		M 35		570150	154,61
	U 20*		570775	174,33		POLYSAN- Edelstahl Press-System 1.4520	M 42 (PR-3S)	Z2	572706 R
U 25*		570780	174,33	M 54 (PR-3S)	Z2		572708 R	672,57	
U 32		570785	204,43	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101 R	1.161,47	
				M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110 R	1.355,58	
				M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579111 R	1.355,58	
				M 15 S (PR-2B)	Z8		574738 R	124,51	
PLÁSTICOS FERRO FERROPLAST GPF PPSU Pressfitting PEX y MULTICAPA	RFz 16*		571325	194,05	M 18 S (PR-2B)	Z8	574740 R	124,51	
	RFz 20*		571330	194,05	M 22 S (PR-2B)	Z8	574742 R	124,51	
	RFz 25		571335	194,05	M 28 S (PR-2B)	Z8	574744 R	124,51	
	RFz 32		571340	194,05	M 35 S (PR-2B)	Z8	574746 R	136,96	
	K16/P18*		572600	194,05					
	K1/20*		572605	194,05					
PLUMBING PLUS EZIPEX Crimp (AUS)	K/25*		572610	194,05					
	K32		572615	194,05					
	K1/40		572620	194,05					
	K1/50		572625	318,61					
	K16/P18*		572600	194,05					
	K/20*		572605	194,05					
PLUMBING PLUS EZIPEX Gas (AUS)	K/25*		572610	194,05					
	K32		572615	194,05					
	K1/40		572620	194,05					
	K1/50		572625	318,61					
	VAU 15 (OD 12,7 mm)		572687	159,80					
	VAU 20 (OD 19,1 mm)		572689	159,80					
PLUMBING PLUS EZIPEX Solar (AUS)	VAU 25 (OD 25,4 mm)		572691	159,80					
	VAU 32 (OD 31,8 mm)		572693	168,10					
	VAU 40 (OD 38,1 mm)		572695	249,07					
	VAU 50 (OD 50,8 mm)		572697	441,10					
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	609,25					
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	609,25					
PLUMBING PLUS EZIPEX Water (AUS)	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	645,58					
	VAU 15 (OD 12,7 mm)		572687	159,80					
	VAU 20 (OD 19,1 mm)		572689	159,80					
	VAU 25 (OD 25,4 mm)		572691	159,80					
	VAU 32 (OD 31,8 mm)		572693	168,10					
	VAU 40 (OD 38,1 mm)		572695	249,07					
POLYPIPE POLYSURE	VAU 50 (OD 50,8 mm)		572697	441,10					
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	609,25					
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	609,25					
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	645,58					
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	124,51					
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	124,51					
POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	136,96					
	TH 10*		570467	186,32					
	TH 15*		570457	186,32					
	TH 22*		570472	186,32					
	TH 28		570477	186,32					
POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455	186,32					
	TH 16*		570460	186,32					
	TH 17*		570462	186,32					
	TH 18*		570465	186,32					
	TH 20*		570470	186,32					
	TH 26*		570475	186,32					
POLYSAN- Edelstahl Press-System	TH 32		570480	186,32					
	TH 40		570485	246,99					
	TH 50 (PZ-S)		572400	645,58					
	TH 63 (PZ-S)		572405	645,58					
	THz 75 (PR-3B)	Z4	572829 R	609,25					
	TH 14 S (PR-2B)**	Z8	574778 R	124,51					
POLYSAN- Edelstahl Press-System	TH 16 S (PR-2B)**	Z8	574782 R	124,51					
	TH 17 S (PR-2B)**	Z8	574784 R	124,51					
	TH 18 S (PR-2B)**	Z8	574786 R	124,51					
	TH 20 S (PR-2B)**	Z8	574788 R	124,51					
	TH 26 S (PR-2B)**	Z8	574794 R	124,51					
	TH 32 S (PR-2B)	Z8	574798 R	136,96					

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Osterreich)	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 17*		570462	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	HE 32		571900	223,12	
	HEz 40		571904	323,80	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 17 S (PR-2B)**	Z8	574784 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
POLYSAN (España) „Rainbow“	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	U 63 (PZ-S)		572365	645,58	
Prandelli Multyrama Pf	H 14*		570310	168,10	
	H 16*		570320	168,10	
	H 18*		570340	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	Prandelli Multyrama Pfm	H 16*		570320	168,10
		H 18*		570340	168,10
		H 20*		570350	168,10
H 26*			570370	168,10	
H 32			570380	168,10	
TH 16*			570460	186,32	
TH 18*			570465	186,32	
TH 20*			570470	186,32	
TH 26*			570475	186,32	
TH 32			570480	186,32	
TH 40			570485	246,99	
TH 50 (PZ-S)			572400	645,58	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 18 S (PR-2B)**		Z8	574786 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
TH 26 S (PR-2B)**		Z8	574794 R	124,51	
TH 32 S (PR-2B)		Z8	574798 R	136,96	
U 16*			570765	174,33	
U 18*			570770	174,33	
U 20*			570775	174,33	
U 40			570790	249,07	
U 50			570795	298,89	
U 63 (PR-3B)		Z4	572837 R	733,81	
PURMO Cleverfit Radial		F 16*		570717	177,45
	F 20*		570727	177,45	
	F 26*		570730	191,98	
	F 32		570735	191,98	
	F 16 S (PR-2B)**	Z8	574728 R	124,51	
	F 20 S (PR-2B)**	Z8	574730 R	124,51	
	F 26 S (PR-2B)**	Z8	574732 R	124,51	
	F 32 S (PR-2B)	Z8	574734 R	136,96	
	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 17*		570462	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 17 S (PR-2B)**	Z8	574784 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 32		570785	204,43	
	VP 16*		570910	185,75	
	VP 20*		570915	185,75	
VP 25		570920	185,75		
R					
Raccorderie Metalliche aesPRES ¹⁾	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Raccorderie Metalliche inoxPRES ¹⁾	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	Raccorderie Metalliche MARINEPRES ¹⁾	M 15		570110	154,61
		M 18		570120	154,61
		M 22		570130	154,61
M 28			570140	154,61	
M 35			570150	154,61	
M 42 (PR-3S)		Z2	572706 R	672,57	
M 54 (PR-3S)		Z2	572708 R	672,57	
M 76,1 XL (PR-3S) ⁸⁾		Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
M 88,9 G XL (PR-3S) ⁸⁾		Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S) ⁸⁾		Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 15 S (PR-2B)		Z8	574738 R	124,51	
M 18 S (PR-2B)		Z8	574740 R	124,51	
M 22 S (PR-2B)		Z8	574742 R	124,51	
M 28 S (PR-2B)		Z8	574744 R	124,51	
M 35 S (PR-2B)		Z8	574746 R	136,96	
Raccorderie Metalliche steelPRES ¹⁾		M 15		570110	154,61
		M 18		570120	154,61
		M 22		570130	154,61
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	RBM Tita-fix	B 14*		570845	203,40
		B 16*		570850	203,40
		B 18*		570855	203,40
B 20*			570860	203,40	
B 26			570870	224,16	
F 16*			570717	177,45	
F 18*			570720	177,45	
F 20*			570727	177,45	
F 16 S (PR-2B)**		Z8	574728 R	124,51	
F 20 S (PR-2B)**		Z8	574730 R	124,51	
H 14*			570310	168,10	
H 16*			570320	168,10	
H 18*			570340	168,10	
H 20*			570350	168,10	
H 26*			570370	168,10	
H 32			570380	168,10	
TH 14*			570455	186,32	
TH 16*			570460	186,32	
TH 18*			570465	186,32	
TH 20*			570470	186,32	
TH 26*			570475	186,32	
TH 32			570480	186,32	
TH 40			570485	246,99	
TH 50 (PZ-S)			572400	645,58	
TH 63 (PZ-S)		572405	645,58		
TH 16 S (PR-2B)**	Z8	574782 R	124,51		
TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)	Z8	574798 R	136,96		
U 14*		570760	174,33		
U 16*		570765	174,33		
U 18*		570770	174,33		
U 20*		570775	174,33		
RBM Tita-gas	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	Redi Nicol Fluxo	TH 14*		570455	186,32
		TH 16*		570460	186,32
		TH 18*		570465	186,32
		TH 20*		570470	186,32
TH 26*			570475	186,32	
TH 32			570480	186,32	
TH 40			570485	246,99	
TH 50 (PZ-S)			572400	645,58	
TH 63 (PZ-S)			572405	645,58	
THz 75 (PR-3B)		Z4	572829 R	609,25	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TH 32 S (PR-2B)	Z8	574798 R	136,96		
Redi Nicol Fluxo Gas	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
RIFENG U PRESS FITTING (F5)	U 14*		570760	174,33	TURBO INOX GAS	M 15		570110	154,61	
	U 16*		570765	174,33		M 18		570120	154,61	
	U 18*		570770	174,33		M 22		570130	154,61	
	U 20*		570775	174,33		M 28		570140	154,61	
	U 25*		570780	174,33		M 35		570150	154,61	
	U 32		570785	204,43		M 42 (PR-3S)	Z2	572706 R	672,57	
	U 40		570790	249,07		M 54 (PR-3S)	Z2	572708 R	672,57	
	U 50		570795	298,89		M 15 S (PR-2B)	Z8	574738 R	124,51	
	U 63 (PZ-S)		572365	645,58		M 18 S (PR-2B)	Z8	574740 R	124,51	
	U 63 (PR-3B)	Z4	572837 R	733,81		M 22 S (PR-2B)	Z8	574742 R	124,51	
	U 75 (PR-3B)	Z4	572828 R	645,58		M 28 S (PR-2B)	Z8	574744 R	124,51	
						M 35 S (PR-2B)	Z8	574746 R	136,96	
RIFENG TH PRESS FITTING (F9)	TH 16*		570460	186,32	Rubinetterie	M 15		570110	154,61	
	TH 20*		570470	186,32	Bresciane	M 18		570120	154,61	
	TH 25*		570495	186,32	Bonomi	M 22		570130	154,61	
	TH 26*		570475	186,32	TURBO STEEL	M 28		570140	154,61	
	TH 32		570480	186,32	M 35		570150	154,61		
	TH 40		570485	246,99	M 42 (PR-3S)	Z2	572706 R	672,57		
	TH 50 (PZ-S)		572400	645,58	M 54 (PR-3S)	Z2	572708 R	672,57		
	TH 63 (PZ-S)		572405	645,58	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		
					M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58		
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58		
RIQUIER A SERTIR	Rfz 12*		571320	194,05	M 15 S (PR-2B)	Z8	574738 R	124,51		
	Rfz 16*		571325	194,05	M 18 S (PR-2B)	Z8	574740 R	124,51		
	Rfz 20*		571330	194,05	M 22 S (PR-2B)	Z8	574742 R	124,51		
	Rfz 25		571335	194,05	M 28 S (PR-2B)	Z8	574744 R	124,51		
					M 35 S (PR-2B)	Z8	574746 R	136,96		
	RIQUIER Système multicouche	TH 16*		570460	186,32	Rubinetterie	B 14*		570845	203,40
		TH 20*		570470	186,32	Bresciane	B 16*		570850	203,40
		TH 26*		570475	186,32	Bonomi	B 18*		570855	203,40
		TH 32		570480	186,32	TURBO PRESS	B 20*		570860	203,40
		TH 40		570485	246,99	B 26		570870	224,16	
TH 50 (PZ-S)			572400	645,58	B 32		570880	224,16		
TH 63 (PZ-S)			572405	645,58	H 14*		570310	168,10		
TH 16 S (PR-2B)**		Z8	574782 R	124,51	H 16*		570320	168,10		
TH 20 S (PR-2B)**		Z8	574788 R	124,51	H 18*		570340	168,10		
TH 26 S (PR-2B)**		Z8	574794 R	124,51	H 20*		570350	168,10		
TH 32 S (PR-2B)	Z8	574798 R	136,96	H 26*		570370	168,10			
U 16*		570765	174,33	H 32		570380	168,10			
U 20*		570775	174,33	TH 14*		570455	186,32			
U 32		570785	204,43	TH 16*		570460	186,32			
U 40		570790	249,07	TH 18*		570465	186,32			
U 50		570795	298,89	TH 20*		570470	186,32			
Roth PressCheck	RN 14*		572672	174,33	TH 26*		570475	186,32		
	RN 16		572670	174,33	TH 32		570480	186,32		
	RN 17*		572674	174,33	TH 40		570485	246,99		
	RN 20*		572676	174,33	TH 50 (PZ-S)		572400	645,58		
	RN 25/26		572678	174,33	TH 63 (PZ-S)		572405	645,58		
	RN 32		572680	204,43	TH 16 S (PR-2B)**	Z8	574782 R	124,51		
	RN 40 (PR-3S)	Z2	572714 R	672,57	TH 20 S (PR-2B)**	Z8	574788 R	124,51		
	RN 50 (PR-3S)	Z2	572716 R	672,57	TH 26 S (PR-2B)**	Z8	574794 R	124,51		
	RNz 63 (PR-3B)	Z4	572836 R	733,81	TH 32 S (PR-2B)	Z8	574798 R	136,96		
					U 14*		570760	174,33		
Rubinetterie Bresciane Bonomi TURBO CuNi	M 15		570110	154,61	U 16*		570765	174,33		
	M 18		570120	154,61	U 18*		570770	174,33		
	M 22		570130	154,61	U 20*		570775	174,33		
	M 28		570140	154,61	U 26* ¹²⁾		570750	204,43		
	M 35		570150	154,61	U 32		570785	204,43		
	M 42 (PR-3S)	Z2	572706 R	672,57	Rubinetterie	TH 16*		570460	186,32	
	M 54 (PR-3S)	Z2	572708 R	672,57	Bresciane	TH 20*		570470	186,32	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	Bonomi	TH 26*		570475	186,32	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	TURBO PRESS	TH 32		570480	186,32	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	GAS	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
M 15 S (PR-2B)	Z8	574738 R	124,51	TH 20 S (PR-2B)**	Z8	574788 R	124,51			
M 18 S (PR-2B)	Z8	574740 R	124,51	TH 26 S (PR-2B)**	Z8	574794 R	124,51			
M 22 S (PR-2B)	Z8	574742 R	124,51	TH 32 S (PR-2B)	Z8	574798 R	136,96			
M 28 S (PR-2B)	Z8	574744 R	124,51							
M 35 S (PR-2B)	Z8	574746 R	136,96							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€		
S						
SA.MI PLASTIC	TH 14*		570455	186,32		
	TH 16*		570460	186,32		
	TH 18*		570465	186,32		
	TH 20*		570470	186,32		
	TH 26*		570475	186,32		
	TH 32		570480	186,32		
	TH 40		570485	246,99		
	TH 50 (PZ-S)		572400	645,58		
	TH 63 (PZ-S)		572405	645,58		
	TH 14 S (PR-2B)**	Z8	574778 R	124,51		
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		
	TH 18 S (PR-2B)**	Z8	574786 R	124,51		
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		
	TH 32 S (PR-2B)**	Z8	574798 R	136,96		
	SA.MI PLASTIC Multistrato Gas	TH 16*		570460	186,32	
		TH 20*		570470	186,32	
		TH 26*		570475	186,32	
		TH 32		570480	186,32	
		TH 16 S (PR-2B)**	Z8	574782 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51		
TH 26 S (PR-2B)**		Z8	574794 R	124,51		
TH 32 S (PR-2B)**		Z8	574798 R	136,96		
SANHA 3fit-Press Pb-free Serie 25000		B 16*		570850	203,40	
		B 20*		570860	203,40	
		B 26		570870	224,16	
		B 32		570880	224,16	
		F 16*		570717	177,45	
		F 20*		570727	177,45	
		F 26*		570730	191,98	
		F 32		570735	191,98	
		Fz 40		570742	205,47	
		Fz 50		570747	311,35	
		F 63 (PZ-S)		572385	645,58	
		F 16 S (PR-2B)**	Z8	574728 R	124,51	
	F 20 S (PR-2B)**	Z8	574730 R	124,51		
	F 26 S (PR-2B)**	Z8	574732 R	124,51		
	F 32 S (PR-2B)**	Z8	574734 R	136,96		
	H 16*		570320	168,10		
	H 20*		570350	168,10		
	H 26*		570370	168,10		
	H 32		570380	168,10		
	H 40 (PZ-4G)		570390	565,67		
	TH 16*		570460	186,32		
	TH 20*		570470	186,32		
	TH 26*		570475	186,32		
	TH 32		570480	186,32		
	TH 40		570485	246,99		
	TH 50 (PZ-S)		572400	645,58		
	TH 63 (PZ-S)		572405	645,58		
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		
	TH 32 S (PR-2B)**	Z8	574798 R	136,96		
	U 16*		570765	174,33		
	U 20*		570775	174,33		
	U 26* ¹²⁾		570750	204,43		
	U 32		570785	204,43		
	U 40		570790	249,07		
	U 50		570795	298,89		
	U 63 (PR-3B)	Z4	572837 R	733,81		
	U 63 (PZ-S)		572365	645,58		
	SANHA 3fit-Press PPSU Serie 35000	B 16*		570850	203,40	
B 20*			570860	203,40		
B 26			570870	224,16		
B 32			570880	224,16		
F 16*			570717	177,45		
F 20*			570727	177,45		
F 26*			570730	191,98		
F 32			570735	191,98		
F 16 S (PR-2B)**		Z8	574728 R	124,51		
F 20 S (PR-2B)**		Z8	574730 R	124,51		
F 26 S (PR-2B)**		Z8	574732 R	124,51		
F 32 S (PR-2B)**		Z8	574734 R	136,96		
H 16*			570320	168,10		
H 20*			570350	168,10		
H 26*			570370	168,10		
H 32			570380	168,10		
TH 16*			570460	186,32		
TH 20*			570470	186,32		
TH 26*			570475	186,32		
TH 32			570480	186,32		
TH 40			570485	246,99		
TH 50 (PZ-S)			572400	645,58		
TH 63 (PZ-S)			572405	645,58		
TH 16 S (PR-2B)**		Z8	574782 R	124,51		
TH 20 S (PR-2B)**		Z8	574788 R	124,51		
TH 26 S (PR-2B)**		Z8	574794 R	124,51		
TH 32 S (PR-2B)**		Z8	574798 R	136,96		
U 16*			570765	174,33		
U 20*			570775	174,33		
U 26* ¹²⁾			570750	204,43		
U 32			570785	204,43		
SANHA Heavy Steel Press		VMP 1/2" G (ØD 21,3 mm)		571766 R	214,81	
		VMPz 3/4" (ØD 26,9 mm)		571764	214,81	
		VMPz 1" (ØD 33,7 mm)		571767	214,81	
		VMPz 1 1/4" (PZ-S) (ØD 42,4 mm)		572413	704,75	
		VMPz 1 1/2" (PR-3B) (ØD 48,3 mm)	Z5	572844 R	479,50	
		VMPz 2" (PR-3B) (ØD 60,3 mm)	Z5	572845 R	479,50	
		SANHA Heavy Steel Press Gas ⁹⁾	VMP 1/2" G (ØD 21,3 mm) ¹¹⁾		571766 R	214,81
			VMPz 3/4" (ØD 26,9 mm)		571764	214,81
			VMPz 1" (ØD 33,7 mm)		571767	214,81
	VMPz 1 1/4" (PZ-S) (ØD 42,4 mm)			572413	704,75	
VMPz 1 1/2" (PR-3B) (ØD 48,3 mm)	Z5		572844 R	479,50		
VMPz 2" (PR-3B) (ØD 60,3 mm)	Z5		572845 R	479,50		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15		570935	185,75
	SA 18		570940	185,75
	SA 22		570945	185,75
	SA 28		570950	185,75
	SA 35		570955	185,75
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76.1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
	SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		570935
SA 18			570940	185,75
SA 22			570945	185,75
SA 28			570950	185,75
SA 35			570955	185,75
M 15			570110	154,61
M 18			570120	154,61
M 22			570130	154,61
M 28			570140	154,61
M 35			570150	154,61
M 42 (PR-3S)		Z2	572706 R	672,57
M 54 (PR-3S)		Z2	572708 R	672,57
XP 64,0 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63
M 76.1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
M 15 S (PR-2B)		Z8	574738 R	124,51
M 18 S (PR-2B)		Z8	574740 R	124,51
M 22 S (PR-2B)		Z8	574742 R	124,51
M 28 S (PR-2B)		Z8	574744 R	124,51
M 35 S (PR-2B)		Z8	574746 R	136,96
V 15			570115	154,61
V 18			570125	154,61
V 22			570135	154,61
V 28			570145	154,61
V 35			570155	154,61
V 42			570165	360,13
V 42 (PR-2B)		Z2	572850 R	322,77
V 54			570175	370,51
V 54 (PR-2B)		Z2	572851 R	348,72
V 15 S (PR-2B)		Z8	574752 R	124,51
V 18 S (PR-2B)		Z8	574756 R	124,51
V 22 S (PR-2B)		Z8	574758 R	124,51
V 28 S (PR-2B)		Z8	574760 R	124,51
V 35 S (PR-2B)		Z8	574762 R	136,96
SANHA-NiroSan-Presssystem Serie 9000	SA 15		570935	185,75
	SA 18		570940	185,75
	SA 22		570945	185,75
	SA 28		570950	185,75
	SA 35		570955	185,75
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€		
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935	185,75	SANHA NiroTherm Industry Serie 98000	SA 15		570935	185,75		
	SA 18		570940	185,75		SA 18		570940	185,75		
	SA 22		570945	185,75		SA 22		570945	185,75		
	SA 28		570950	185,75		SA 28		570950	185,75		
	SA 35		570955	185,75		SA 35		570955	185,75		
	M 15		570110	154,61		M 15		570110	154,61		
	M 18		570120	154,61		M 18		570120	154,61		
	M 22		570130	154,61		M 22		570130	154,61		
	M 28		570140	154,61		M 28		570140	154,61		
	M 35		570150	154,61		M 35		570150	154,61		
	M 42 (PR-3S)	Z2	572706 R	672,57		M 42 (PR-3S)	Z2	572706 R	672,57		
	M 54 (PR-3S)	Z2	572708 R	672,57		M 54 (PR-3S)	Z2	572708 R	672,57		
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58		
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58		
	M 15 S (PR-2B)	Z8	574738 R	124,51		M 15 S (PR-2B)	Z8	574738 R	124,51		
	M 18 S (PR-2B)	Z8	574740 R	124,51		M 18 S (PR-2B)	Z8	574740 R	124,51		
	M 22 S (PR-2B)	Z8	574742 R	124,51		M 22 S (PR-2B)	Z8	574742 R	124,51		
	M 28 S (PR-2B)	Z8	574744 R	124,51		M 28 S (PR-2B)	Z8	574744 R	124,51		
	M 35 S (PR-2B)	Z8	574746 R	136,96		M 35 S (PR-2B)	Z8	574746 R	136,96		
	V 15		570115	154,61		V 15		570115	154,61		
	V 18		570125	154,61		V 18		570125	154,61		
	V 22		570135	154,61		V 22		570135	154,61		
	V 28		570145	154,61		V 28		570145	154,61		
	V 35		570155	154,61		V 35		570155	154,61		
	V 42		570165	360,13		V 42		570165	360,13		
	V 42 (PR-2B)	Z2	572850 R	322,77		V 42 (PR-2B)	Z2	572850 R	322,77		
	V 54		570175	370,51		V 54		570175	370,51		
	V 54 (PR-2B)	Z2	572851 R	348,72		V 54 (PR-2B)	Z2	572851 R	348,72		
	V 15 S (PR-2B)	Z8	574752 R	124,51		V 15 S (PR-2B)	Z8	574752 R	124,51		
	V 18 S (PR-2B)	Z8	574756 R	124,51		V 18 S (PR-2B)	Z8	574756 R	124,51		
	V 22 S (PR-2B)	Z8	574758 R	124,51		V 22 S (PR-2B)	Z8	574758 R	124,51		
	V 28 S (PR-2B)	Z8	574760 R	124,51		V 28 S (PR-2B)	Z8	574760 R	124,51		
	V 35 S (PR-2B)	Z8	574762 R	136,96		V 35 S (PR-2B)	Z8	574762 R	136,96		
	SANHA NiroTherm Serie 91000	SA 15		570935		185,75	SANHA-Press Chrom Serie 16000	SA 12		570930	269,83
		SA 18		570940		185,75		SA 15		570935	185,75
		SA 22		570945		185,75		SA 18		570940	185,75
		SA 28		570950		185,75		SA 22		570945	185,75
		SA 35		570955		185,75		SA 28		570950	185,75
		M 15		570110		154,61		M 12		570100	154,61
M 18			570120	154,61	M 15			570110	154,61		
M 22			570130	154,61	M 18			570120	154,61		
M 28			570140	154,61	M 22			570130	154,61		
M 35			570150	154,61	M 28			570140	154,61		
M 42 (PR-3S)		Z2	572706 R	672,57	M 12 S (PR-2B)	Z8		574736 R	124,51		
M 54 (PR-3S)		Z2	572708 R	672,57	M 15 S (PR-2B)	Z8		574738 R	124,51		
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	M 18 S (PR-2B)	Z8		574740 R	124,51		
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	M 22 S (PR-2B)	Z8		574742 R	124,51		
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	M 28 S (PR-2B)	Z8		574744 R	124,51		
M 15 S (PR-2B)		Z8	574738 R	124,51	V 12			570107	154,61		
M 18 S (PR-2B)		Z8	574740 R	124,51	V 15			570115	154,61		
M 22 S (PR-2B)		Z8	574742 R	124,51	V 18			570125	154,61		
M 28 S (PR-2B)		Z8	574744 R	124,51	V 22			570135	154,61		
M 35 S (PR-2B)		Z8	574746 R	136,96	V 28			570145	154,61		
V 15			570115	154,61	V 12 S (PR-2B)	Z8		574748 R	124,51		
V 18			570125	154,61	V 15 S (PR-2B)	Z8		574752 R	124,51		
V 22			570135	154,61	V 18 S (PR-2B)	Z8		574756 R	124,51		
V 28			570145	154,61	V 22 S (PR-2B)	Z8		574758 R	124,51		
V 35			570155	154,61	V 28 S (PR-2B)	Z8		574760 R	124,51		
V 42			570165	360,13							
V 42 (PR-2B)		Z2	572850 R	322,77							
V 54			570175	370,51							
V 54 (PR-2B)		Z2	572851 R	348,72							
V 15 S (PR-2B)		Z8	574752 R	124,51							
V 18 S (PR-2B)		Z8	574756 R	124,51							
V 22 S (PR-2B)		Z8	574758 R	124,51							
V 28 S (PR-2B)		Z8	574760 R	124,51							
V 35 S (PR-2B)		Z8	574762 R	136,96							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		570930	269,83	
	SA 14		570932	269,83	
	SA 15		570935	185,75	
	SA 16		570937	185,75	
	SA 18		570940	185,75	
	SA 22		570945	185,75	
	SA 28		570950	185,75	
	SA 35		570955	185,75	
	M 12		570100	154,61	
	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 12 S (PR-2B)	Z8	574736 R	124,51	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	V 12		570107	154,61	
	V 14		570112	154,61	
	VG 14		570132	154,61	
	V 15		570115	154,61	
	V 16		570117	154,61	
	VG 16		570137	154,61	
	V 18		570125	154,61	
	V 22		570135	154,61	
	V 28		570145	154,61	
	V 35		570155	154,61	
	V 42		570165	360,13	
	V 42 (PR-2B)	Z2	572850 R	322,77	
	V 54		570175	370,51	
	V 54 (PR-2B)	Z2	572851 R	348,72	
	V 12 S (PR-2B)	Z8	574748 R	124,51	
	VG 14 S (PR-2B)	Z8	574750 R	124,51	
	V 15 S (PR-2B)	Z8	574752 R	124,51	
	VG 16 S (PR-2B)	Z8	574754 R	124,51	
	V 18 S (PR-2B)	Z8	574756 R	124,51	
	V 22 S (PR-2B)	Z8	574758 R	124,51	
	V 28 S (PR-2B)	Z8	574760 R	124,51	
	V 35 S (PR-2B)	Z8	574762 R	136,96	
	SANHA-Press Pressfittings Serie 6000	SA 12		570930	269,83
		SA 14		570932	269,83
		SA 15		570935	185,75
SA 16			570937	185,75	
SA 18			570940	185,75	
SA 22			570945	185,75	
SA 28			570950	185,75	
SA 35			570955	185,75	
M 12			570100	154,61	
M 15			570110	154,61	
M 18			570120	154,61	
M 22			570130	154,61	
M 28			570140	154,61	
M 35			570150	154,61	
M 42 (PR-3S)		Z2	572706 R	672,57	
M 54 (PR-3S)		Z2	572708 R	672,57	
XP 64,0 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63	
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47	
M 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 12 S (PR-2B)		Z8	574736 R	124,51	
M 15 S (PR-2B)		Z8	574738 R	124,51	
M 18 S (PR-2B)		Z8	574740 R	124,51	
M 22 S (PR-2B)		Z8	574742 R	124,51	
M 28 S (PR-2B)		Z8	574744 R	124,51	
M 35 S (PR-2B)		Z8	574746 R	136,96	
V 12			570107	154,61	
V 14			570112	154,61	
VG 14			570132	154,61	
V 15			570115	154,61	
V 16			570117	154,61	
VG 16			570137	154,61	
V 18			570125	154,61	
V 22			570135	154,61	
V 28			570145	154,61	
V 35			570155	154,61	
V 42			570165	360,13	
V 42 (PR-2B)		Z2	572850 R	322,77	
V 54			570175	370,51	
V 54 (PR-2B)		Z2	572851 R	348,72	
V 12 S (PR-2B)		Z8	574748 R	124,51	
VG 14 S (PR-2B)		Z8	574750 R	124,51	
V 15 S (PR-2B)		Z8	574752 R	124,51	
VG 16 S (PR-2B)		Z8	574754 R	124,51	
V 18 S (PR-2B)		Z8	574756 R	124,51	
V 22 S (PR-2B)	Z8	574758 R	124,51		
V 28 S (PR-2B)	Z8	574760 R	124,51		
V 35 S (PR-2B)	Z8	574762 R	136,96		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	269,83	
	SA 15		570935	185,75	
	SA 18		570940	185,75	
	SA 22		570945	185,75	
	SA 28		570950	185,75	
	SA 35		570955	185,75	
	M 12		570100	154,61	
	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63	
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 12 S (PR-2B)	Z8	574736 R	124,51	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	V 12		570107	154,61	
	V 15		570115	154,61	
	V 18		570125	154,61	
	V 22		570135	154,61	
	V 28		570145	154,61	
	V 35		570155	154,61	
	V 42		570165	360,13	
	V 42 (PR-2B)	Z2	572850 R	322,77	
	V 54		570175	370,51	
	V 54 (PR-2B)	Z2	572851 R	348,72	
	V 12 S (PR-2B)	Z8	574748 R	124,51	
	VG 14 S (PR-2B)	Z8	574750 R	124,51	
	V 15 S (PR-2B)	Z8	574752 R	124,51	
	VG 16 S (PR-2B)	Z8	574754 R	124,51	
	V 18 S (PR-2B)	Z8	574756 R	124,51	
	V 22 S (PR-2B)	Z8	574758 R	124,51	
	V 28 S (PR-2B)	Z8	574760 R	124,51	
	V 35 S (PR-2B)	Z8	574762 R	136,96	
	SANHA PURAPRESS Serie 8000	SA 12		570930	269,83
		SA 14		570932	269,83
		SA 15		570935	185,75
SA 16			570937	185,75	
SA 18			570940	185,75	
SA 22			570945	185,75	
SA 28			570950	185,75	
SA 35			570955	185,75	
M 12			570100	154,61	
M 15 ¹⁾			570110	154,61	
M 18 ¹⁾			570120	154,61	
M 22 ¹⁾			570130	154,61	
M 28 ¹⁾			570140	154,61	
M 35 ¹⁾			570150	154,61	
M 42 (PR-3S)		Z2	572706 R	672,57	
M 54 (PR-3S)		Z2	572708 R	672,57	
XP 64,0 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R	1.056,63	
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47	
M 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
M 12 S (PR-2B)		Z8	574736 R	124,51	
M 15 S (PR-2B)		Z8	574738 R	124,51	
M 18 S (PR-2B)		Z8	574740 R	124,51	
M 22 S (PR-2B)		Z8	574742 R	124,51	
M 28 S (PR-2B)		Z8	574744 R	124,51	
M 35 S (PR-2B)		Z8	574746 R	136,96	
V 12			570107	154,61	
V 14			570112	154,61	
VG 14			570132	154,61	
V 15			570115	154,61	
V 16			570117	154,61	
VG 16			570137	154,61	
V 18			570125	154,61	
V 22			570135	154,61	
V 28			570145	154,61	
V 35			570155	154,61	
V 42			570165	360,13	
V 42 (PR-2B)		Z2	572850 R	322,77	
V 54			570175	370,51	
V 54 (PR-2B)		Z2	572851 R	348,72	
V 12 S (PR-2B)		Z8	574748 R	124,51	
VG 14 S (PR-2B)		Z8	574750 R	124,51	
V 15 S (PR-2B)		Z8	574752 R	124,51	
VG 16 S (PR-2B)		Z8	574754 R	124,51	
V 18 S (PR-2B)		Z8	574756 R	124,51	
V 22 S (PR-2B)	Z8	574758 R	124,51		
V 28 S (PR-2B)	Z8	574760 R	124,51		
V 35 S (PR-2B)	Z8	574762 R	136,96		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
SANHA-Therm Serie 24000	SA 12		570930	269,83
	SA 15		570935	185,75
	SA 18		570940	185,75
	SA 22		570945	185,75
	SA 28		570950	185,75
	SA 35		570955	185,75
	M 12		570100	154,61
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108 R	1.161,47
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
	V 12		570107	154,61
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
V 35 S (PR-2B)	Z8	574762 R	136,96	
SANHA-Therm Industry Serie 28000	SA 12		570930	269,83
	SA 15		570935	185,75
	SA 18		570940	185,75
	SA 22		570945	185,75
	SA 28		570950	185,75
	SA 35		570955	185,75
	M 12		570100	154,61
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108 R	1.161,47
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
	V 12		570107	154,61
	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
V 35 S (PR-2B)	Z8	574762 R	136,96	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
SANITOP PERMATUBO INOX	M 15		570110	154,61	
	M 18 ¹⁾		570120	154,61	
	M 22		570130	154,61	
	M 28 ¹⁾		570140	154,61	
	M 35		570150	154,61	
	M 35 (PR-3S)	Z2	572727 R	672,57	
	M 42 (PZ-4G)		570160	498,19	
	M 54 (PZ-4G)		570170	498,19	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	SANPRO THPRESS	TH 16*		570460	186,32
		TH 20*		570470	186,32
TH 26*			570475	186,32	
TH 32			570480	186,32	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 20 S (PR-2B)**		Z8	574788 R	124,51	
SATEC SK ViTerm	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
SAVEUR REFLEX PEX Water	TH 32		570480	186,32	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PZ-S)		572365	645,58	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
SAVEUR REFLEX PEX-AL-PEX Gas	TH 32		570480	186,32	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 32		570480	186,32	
	TH 14*		570455	186,32	
Schütz duo-flex tri-o-flex	TH 16*		570460	186,32	
	TH 17*		570462	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
Schwer Fittings AQUApress	M 12		570100	154,61	
	M 15		570110	154,61	
	M 18		570120	154,61	
	M 22		570130	154,61	
	M 28		570140	154,61	
	M 35		570150	154,61	
	M 42 (PZ-4G)		570160	498,19	
	M 54 (PZ-4G)		570170	498,19	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 12 S (PR-2B)	Z8	574736 R	124,51	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
Seppelfricke -> Aalberts integrated piping systems	M 35 S (PR-2B)	Z8	574746 R	136,96	
	SESTA SESTA GAS	TH 14*	570455	186,32	
	TH 16*	570460	186,32		
	TH 20*	570470	186,32		
	TH 26*	570475	186,32		
TH 32	570480	186,32			

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP 1/2" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
SESTA Sistema multistrato	H 16*		570320	168,10	
	H 20*		570350	168,10	
	TH 14*		570455	186,32	
	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 20*		570775	174,33	
	SIGMA LI Premium	TH 16*		570460	186,32
		TH 20*		570470	186,32
		TH 25*		570495	186,32
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
SLOVARM PEX-THERM	U 16*		570765	174,33	
	U 20*		570775	174,33	
	H 26*		570370	168,10	
	U 32		570785	204,43	
	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
STANDARD HIDRAULICA MultiStandard	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 25*		570360	168,10	
	H 32		570380	168,10	
	RFz 16*		571325	194,05	
	RFz 20*		571330	194,05	
	RFz 25		571335	194,05	
	RFz 32		571340	194,05	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 32		570480	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	U 16*		570765	174,33	
	U 18*		570770	174,33	
	U 20*		570775	174,33	
	U 25*		570780	174,33	
	U 32		570785	204,43	
	U 40		570790	249,07	
	U 50		570795	298,89	
	U 63 (PR-3B)	Z4	572837 R	733,81	
	U 63 (PZ-S)		572365	645,58	
steeltrade Presssystem Edelstahl Kontur M	M 15		570110	154,61	
	M 18 ¹⁾		570120	154,61	
	M 22		570130	154,61	
	M 28 ¹⁾		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)		572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58	
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 18 S (PR-2B)	Z8	574740 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
STELBI Polikraft	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
	U 26* ¹²⁾		570750	204,43	
STELBI Stelgas	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
STH Westco COPPER PRESS	M 15		570110	154,61	
	M 22		570130	154,61	
	M 28 ¹⁾		570140	154,61	
	M 35		570150	154,61	
	M 42 (PR-3S)	Z2	572706 R	672,57	
	M 54 (PR-3S)	Z2	572708 R	672,57	
	M 15 S (PR-2B)	Z8	574738 R	124,51	
	M 22 S (PR-2B)	Z8	574742 R	124,51	
	M 28 S (PR-2B)	Z8	574744 R	124,51	
	M 35 S (PR-2B)	Z8	574746 R	136,96	
	T				
	TDM BRASS Serie 1600	H 16*		570320	168,10
H 18*			570340	168,10	
H 20*			570350	168,10	
H 25*			570360	168,10	
H 26*			570370	168,10	
H 32			570380	168,10	
TH 16*			570460	186,32	
TH 18*			570465	186,32	
TH 20*			570470	186,32	
TH 25*			570495	186,32	
TH 26*			570475	186,32	
THL 32			570487	186,32	
TH 40			570485	246,99	
TH 50 (PZ-S)			572400	645,58	
TH 63 (PZ-S)			572405	645,58	
TH 16 S (PR-2B)**		Z8	574782 R	124,51	
TH 18 S (PR-2B)**		Z8	574786 R	124,51	
TH 20 S (PR-2B)**	Z8	574788 R	124,51		
TH 25 S (PR-2B)**	Z8	574792 R	124,51		
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
U 16*		570765	174,33		
U 18*		570770	174,33		
U 20*		570775	174,33		
U 25*		570780	174,33		
U 26* ¹²⁾		570750	204,43		
U 32		570785	204,43		
TDM BRASS Serie 2600	H 16*		570320	168,10	
	H 18*		570340	168,10	
	H 20*		570350	168,10	
	H 25*		570360	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 25*		570495	186,32	
	TH 26*		570475	186,32	
	THL 32		570487	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 25 S (PR-2B)**	Z8	574792 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
U 16*		570765	174,33		
U 18*		570770	174,33		
U 20*		570775	174,33		
U 25*		570780	174,33		
U 26* ¹²⁾		570750	204,43		
U 32		570785	204,43		
TDM BRASS Serie 1700 gas	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	THL 32		570487	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
TH 26 S (PR-2B)**	Z8	574794 R	124,51		
TermaConcept TC-PRESS	Basic E01 ¹⁾		571855	305,17	
THERMOLUTZ	H 14*		570310	168,10	
	H 16*		570320	168,10	
	TH 20*		570470	186,32	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TE-SA TE-SA press serie 800	TH 14*		570455	186,32
	TH 16*		570460	186,32	
	TH 18*		570465	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	TH 40		570485	246,99	
	TH 50 (PZ-S)		572400	645,58	
	TH 63 (PZ-S)		572405	645,58	
	TH 14 S (PR-2B)**	Z8	574778 R	124,51	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51	
	TH 18 S (PR-2B)**	Z8	574786 R	124,51	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	
	TH 32 S (PR-2B)	Z8	574798 R	136,96	
THERMACOME ACOPEX ALU	H 16*		570320	168,10	
	H 20*		570350	168,10	
	H 26*		570370	168,10	
	H 32		570380	168,10	
	TH 16*		570460	186,32	
	TH 20*		570470	186,32	
	TH 26*		570475	186,32	
	TH 32		570480	186,32	
	U 16*		570765	174,33	
	U 20*		570775	174,33	
U 32		570785	204,43		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	
TIEMME 1650 AL-COBRAPEX	TH 14*		570455	186,32	TRA MULTITRAPRESS	U 16*		570765	174,33	
	TH 16*		570460	186,32		U 18*		570770	174,33	
	TH 18*		570465	186,32		U 20*		570775	174,33	
	TH 20*		570470	186,32		U 25*		570780	174,33	
	TH 25*		570495	186,32		U 32		570785	204,43	
	TH 26*		570475	186,32		U 40		570790	249,07	
	THL 32		570487	186,32		U 50		570795	298,89	
	TH 40		570485	246,99		U 63 (PR-3B)	Z4	572837 R	733,81	
	TH 50 (PZ-S)		572400	645,58		U 63 (PZ-S)		572365	645,58	
	TH 63 (PZ-S)		572405	645,58		TRA TRAPRESS	H 12*		570300	168,10
	THz 75 (PR-3B)	Z4	572829 R	609,25			H 16*		570320	168,10
	TH 14 S (PR-2B)**	Z8	574778 R	124,51			H 20*		570350	168,10
	TH 16 S (PR-2B)**	Z8	574782 R	124,51			H 25*		570360	168,10
	TH 18 S (PR-2B)**	Z8	574786 R	124,51			H 32		570380	168,10
	TH 20 S (PR-2B)**	Z8	574788 R	124,51			Rfz 12*		571320	194,05
	TH 25 S (PR-2B)**	Z8	574792 R	124,51			Rfz 16*		571325	194,05
	TH 26 S (PR-2B)**	Z8	574794 R	124,51			Rfz 20*		571330	194,05
							Rfz 25		571335	194,05
							Rfz 32		571340	194,05
	TIEMME 1700 COBRAPEX	Rfz 12*		571320		194,05	Tradelink TradePex Crimp Water	K16/P18*		572600
Rfz 16*			571325	194,05	K/20*			572605	194,05	
Rfz 20*			571330	194,05	K/25*			572610	194,05	
Rfz 25			571335	194,05	K32			572615	194,05	
Rfz 32			571340	194,05	K1/40			572620	194,05	
TH 40			570485	246,99	K1/50			572625	318,61	
TH 50 (PZ-S)			572400	645,58	Tradelink TradePex Crimp Gas	K16/P18*			572600	194,05
TH 63 (PZ-S)			572405	645,58		K/20*			572605	194,05
						K/25*			572610	194,05
						K32			572615	194,05
				K1/40			572620	194,05		
				K1/50			572625	318,61		
TIEMME 1650 AL-COBRAPEX GAS	TH 16*		570460	186,32	TUBIPLAST ITALY MULTILAYER PIPE	TH 16*		570460	186,32	
	TH 20*		570470	186,32		TH 18*		570465	186,32	
	TH 26*		570475	186,32		TH 20*		570470	186,32	
	THL 32		570487	186,32		TH 26*		570475	186,32	
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		TH 32		570480	186,32	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		TH 40		570485	246,99	
TH 26 S (PR-2B)**	Z8	574794 R	124,51	TH 50 (PZ-S)		572400	645,58			
TIGRE ALPEX GÁS	TH 16*		570460	186,32	TH 63 (PZ-S)		572405	645,58		
	TH 20*		570470	186,32	TH 16 S (PR-2B)**	Z8	574782 R	124,51		
	TH 26*		570475	186,32	TH 18 S (PR-2B)**	Z8	574786 R	124,51		
	TH 32		570480	186,32	TH 20 S (PR-2B)**	Z8	574788 R	124,51		
					TH 26 S (PR-2B)**	Z8	574794 R	124,51		
					TH 32 S (PR-2B)	Z8	574798 R	136,96		
					H 16*		570320	168,10		
					H 18*		570340	168,10		
					H 20*		570350	168,10		
					H 26*		570370	168,10		
TKM Systemtechnik	TH 14*		570455	186,32	H 32		570380	168,10		
	TH 16*		570460	186,32	U 16*		570765	174,33		
	TH 20*		570470	186,32	U 18*		570770	174,33		
	TH 26*		570475	186,32	U 20*		570775	174,33		
	TH 32		570480	186,32	U 26* ¹²⁾		570750	204,43		
	TH 40		570485	246,99	U 32		570785	204,43		
	TH 50 (PZ-S)		572400	645,58	TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16*		570460	186,32	
	TH 63 (PZ-S)		572405	645,58		TH 18*		570465	186,32	
						TH 20*		570470	186,32	
						TH 26*		570475	186,32	
				TH 32			570480	186,32		
				TH 16 S (PR-2B)**		Z8	574782 R	124,51		
				TH 18 S (PR-2B)**		Z8	574786 R	124,51		
				TH 20 S (PR-2B)**		Z8	574788 R	124,51		
				TH 26 S (PR-2B)**		Z8	574794 R	124,51		
				TH 32 S (PR-2B)		Z8	574798 R	136,96		
TRA Multi TRA+	H 16*		570320	168,10	TWEETOP	U 16*		570765	174,33	
	H 20*		570350	168,10		U 20*		570775	174,33	
	H 25*		570360	168,10		U 25*		570780	174,33	
	H 26*		570370	168,10		U 32		570785	204,43	
	H 32		570380	168,10		U 40		570790	249,07	
	H 40 (PZ-46)		570390	565,67		U 50		570795	298,89	
	TH 16*		570460	186,32		U 63 (PR-3B)	Z4	572837 R	733,81	
	TH 20*		570470	186,32		U 63 (PZ-S)		572365	645,58	
	TH 25*		570495	186,32		U 75 (PR-3B)	Z4	572828 R	645,58	
	TH 26*		570475	186,32						
	TH 32		570480	186,32						
	TH 40		570485	246,99						
	TH 50 (PZ-S)		572400	645,58						
	TH 63 (PZ-S)		572405	645,58						
	THz 75 (PR-3B)	Z4	572829 R	609,25						
	TH 16 S (PR-2B)**	Z8	574782 R	124,51						
	TH 20 S (PR-2B)**	Z8	574788 R	124,51						
	TH 25 S (PR-2B)**	Z8	574792 R	124,51						
	TH 26 S (PR-2B)**	Z8	574794 R	124,51						
	TH 32 S (PR-2B)	Z8	574798 R	136,96						
U 16*		570765	174,33							
U 20*		570775	174,33							
U 25*		570780	174,33							
U 26* ¹²⁾		570750	204,43							
U 32		570785	204,43							
U 40		570790	249,07							
U 50		570795	298,89							

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
U				
UNICAL AG	U 16*		570765	174,33
MAX-MULTIPEX	U 20*		570775	174,33
	H 26*		570370	168,10
	U 26* ⁽¹²⁾		570750	204,43
	U 32		570785	204,43
UNIDELTA DELTAPRESS	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
UNIDELTA DELTAPRESS GAS	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32		570785	204,43
Uponor	UP 14*		572630	174,33
	UP 16*		572632	174,33
	UP 20*		572636	174,33
	UP 25		572638	174,33
	UP 32		572640	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
	U 63 (PZ-S)		572365	645,58
	U 75 (PR-3B)	Z4	572828 R	645,58
V				
Valsir Bravopress	B 16*		570850	203,40
	B 20*		570860	203,40
	B 26		570870	224,16
	B 32		570880	224,16
	F 16*		570717	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 32 V		570685	214,81
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 26* ⁽¹²⁾		570750	204,43
	U 32		570785	204,43
Valsir PEXAL	H 14*		570310	168,10
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	H 32 V		570685	214,81
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 26* ⁽¹²⁾		570750	204,43
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
	U 63 (PZ-S)		572365	645,58
	U 75 (PR-3B)	Z4	572828 R	645,58

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Van Marcke NV SYSTEMPEX	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	THz 75 (PR-3B)	Z4	572829 R	609,25
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
Van Marcke NV Tubipress	M 12		570100	154,61
	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
Variotherm System TH	TH 11,6*		570482	186,32
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 11,6 S (PR-2B)**	Z8	574774 R	124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
VESBO CARBON	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
VESBO INOX	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
VESBO MULTIPRESS TH-U	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 26* ⁽¹²⁾		570750	204,43
	U 32		570785	204,43
VESBO VPREMIUM	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
Viega Fonterra	VX 12*		571630	214,81
	VP 14/15*		570905	185,75
	VP 16/17*		570910	185,75
	VP 20*		570915	185,75
	VP 25 ⁽²⁾		570920	185,75
Viega MegaPress (ASTM) ⁽¹⁰⁾	VMP 3/8" (OD 17,2 mm)		571740	214,81
	VMP 1/2" G (OD 21,3 mm)		571766 R	214,81
	VMPz 3/8" (OD 26,9 mm)		571764	214,81
	VMPz 1" (OD 33,7 mm)		571767	214,81
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		57213	704,75
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844 R	479,50
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845 R	479,50

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Viega MegaPress 304 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	214,81	Viega Profipress	V 12		570107	154,61	
	VMPz ¾" (OD 26,9 mm)		571764	214,81		VG 14		570132	154,61	
	VMPz 1" (OD 33,7 mm)		571767	214,81		V 15		570115	154,61	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75		VG 16		570137	154,61	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50		V 18		570125	154,61	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	479,50		V 22		570135	154,61	
Viega MegaPress 316 (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	214,81		V 28		570145	154,61	
	VMPz ¾" (OD 26,9 mm)		571764	214,81		V 35		570155	154,61	
	VMPz 1" (OD 33,7 mm)		571767	214,81		V 42		570165	360,13	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75		V 42 (PR-2B)	22	572850 R	322,77	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50		V 54		570175	370,51	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	479,50		V 54 (PR-2B)	22	572851 R	348,72	
Viega MegaPress 316 FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	214,81		VFz 64,0 (PR-3B) ⁶⁾	25	572815 R	609,25	
	VMPz ¾" (OD 26,9 mm)		571764	214,81		VFz 66,7 (PR-3B)	25	572846 R	609,25	
	VMPz 1" (OD 33,7 mm)		571767	214,81		VFz 76,1 (PR-3B) ⁶⁾	25	572816 R	609,25	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75		VFz 88,9 (PR-3B) ⁶⁾	25	572817 R	645,58	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50		VFz 108,0 (PR-3B) ⁶⁾	25	572818 R	645,58	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	479,50		V 12 S (PR-2B)	28	574748 R	124,51	
Viega MegaPress CuNi (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	214,81		VG 14 S (PR-2B)	28	574750 R	124,51	
	VMPz ¾" (OD 26,9 mm)		571764	214,81		V 15 S (PR-2B)	28	574752 R	124,51	
	VMPz 1" (OD 33,7 mm)		571767	214,81		VG 16 S (PR-2B)	28	574754 R	124,51	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75		V 18 S (PR-2B)	28	574756 R	124,51	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50		V 22 S (PR-2B)	28	574758 R	124,51	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	479,50		V 28 S (PR-2B)	28	574760 R	124,51	
Viega MegaPress FKM (ASTM) ¹⁰⁾	VMP ½" G (OD 21,3 mm)		571766 R	214,81		V 35 S (PR-2B)	28	574762 R	136,96	
	VMPz ¾" (OD 26,9 mm)		571764	214,81		Viega Profipress G	V 12		570107	154,61
	VMPz 1" (OD 33,7 mm)		571767	214,81			VG 14		570132	154,61
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75			V 15		570115	154,61
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50			VG 16		570137	154,61
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	479,50	V 18			570125	154,61	
Viega Megapress (EN) ⁹⁾	VMP ¾" (OD 17,2 mm)		571740	214,81	V 22			570135	154,61	
	VMP ½" G (OD 21,3 mm)		571766 R	214,81	V 28			570145	154,61	
	VMPz ¾" (OD 26,9 mm)		571764	214,81	V 35			570155	154,61	
	VMPz 1" (OD 33,7 mm)		571767	214,81	V 42			570165	360,13	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75	V 42 (PR-2B)		22	572850 R	322,77	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50	V 54			570175	370,51	
Viega Megapress S (EN) ⁹⁾	VMP ¾" (OD 17,2 mm)		571740	214,81	V 54 (PR-2B)		22	572851 R	348,72	
	VMP ½" G (OD 21,3 mm)		571766 R	214,81	VFz 64,0 (PR-3B) ⁶⁾		25	572815 R	609,25	
	VMPz ¾" (OD 26,9 mm)		571764	214,81	V 12 S (PR-2B)		28	574748 R	124,51	
	VMPz 1" (OD 33,7 mm)		571767	214,81	VG 14 S (PR-2B)		28	574750 R	124,51	
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75	V 15 S (PR-2B)		28	574752 R	124,51	
	VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50	VG 16 S (PR-2B)		28	574754 R	124,51	
Viega Megapress S XL (EN) ⁹⁾	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	479,50	V 18 S (PR-2B)		28	574756 R	124,51	
	VMP ¾" (OD 17,2 mm)		571740	214,81	V 22 S (PR-2B)		28	574758 R	124,51	
	VMP ½" G (OD 21,3 mm)		571766 R	214,81	V 28 S (PR-2B)		28	574760 R	124,51	
	VMPz ¾" (OD 26,9 mm)		571764	214,81	V 35 S (PR-2B)		28	574762 R	136,96	
	VMPz 1" (OD 33,7 mm)		571767	214,81	Viega Profipress S		V 12		570107	154,61
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75			V 15		570115	154,61
VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50	V 18				570125	154,61	
VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845 R	479,50	V 22				570135	154,61	
VMP ¾" (OD 17,2 mm)		571740	214,81	V 28				570145	154,61	
VMP ½" G (OD 21,3 mm)		571766 R	214,81	V 35				570155	154,61	
VMPz ¾" (OD 26,9 mm)		571764	214,81	V 12 S (PR-2B)			28	574748 R	124,51	
VMPz 1" (OD 33,7 mm)		571767	214,81	V 15 S (PR-2B)			28	574752 R	124,51	
VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413	704,75	V 18 S (PR-2B)		28	574756 R	124,51		
VMPz 1½" (PR-3B) (OD 48,3 mm)	25	572844 R	479,50	V 22 S (PR-2B)		28	574758 R	124,51		
Viega Pexfit	VX 16*		571635	214,81	V 28 S (PR-2B)	28	574760 R	124,51		
	VX 20*		571640	214,81	V 35 S (PR-2B)	28	574762 R	136,96		
	VX 25*		571645	214,81	Viega Profipress Therm	V 12		570107	154,61	
Viega Pexfit G	VX 16*		571635	214,81		V 15		570115	154,61	
	VX 20*		571640	214,81		V 18		570125	154,61	
	VX 25*		571645	214,81		V 22		570135	154,61	
Viega Prestabo	V 12		570107	154,61		V 12 S (PR-2B)	28	574748 R	124,51	
	V 15		570115	154,61		V 15 S (PR-2B)	28	574752 R	124,51	
	V 18		570125	154,61		V 18 S (PR-2B)	28	574756 R	124,51	
	V 22		570135	154,61		V 22 S (PR-2B)	28	574758 R	124,51	
	V 28		570145	154,61		V 28 S (PR-2B)	28	574760 R	124,51	
	V 35		570155	154,61		V 35 S (PR-2B)	28	574762 R	136,96	
	V 42		570165	360,13	Viega ProPress (ASTM) ¹⁰⁾	VUS ½" (OD 15,9 mm)		571770	186,79	
	V 42 (PR-2B)	22	572850 R	322,77		VUS ¾" (OD 22,2 mm)		571775	186,79	
	V 54		570175	370,51		VUS 1" (OD 28,6 mm)		571780	186,79	
	V 54 (PR-2B)	22	572851 R	348,72		VUS 1¼" (OD 34,9 mm)		571785	186,79	
	VFz 64,0 (PR-3B) ⁶⁾	25	572815 R	609,25		VUS 1½" (OD 41,3 mm)		571790	360,13	
	VFz 76,1 (PR-3B) ⁶⁾	25	572816 R	609,25		VUS 2" (OD 54,0 mm)		571795	370,51	
	VFz 88,9 (PR-3B) ⁶⁾	25	572817 R	645,58		VUSFz 2½" (PR-3B) (OD 66,7 mm)	25	572819 R	609,25	
	VFz 108,0 (PR-3B) ⁶⁾	25	572818 R	645,58		XL-C/XL-S		572820 R	609,25	
	V 12 S (PR-2B)	28	574748 R	124,51		XL-C/XL-S		572821 R	645,58	
	V 15 S (PR-2B)	28	574752 R	124,51						
	V 18 S (PR-2B)	28	574756 R	124,51						
	V 22 S (PR-2B)	28	574758 R	124,51						
	V 28 S (PR-2B)	28	574760 R	124,51						
	V 35 S (PR-2B)	28	574762 R	136,96						

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€	
Viega ProPress 304 FKM (ASTM) ⁽³⁾	VUS ½" (OD 15,9 mm)		571770	186,79	
	VUS ¾" (OD 22,2 mm)		571775	186,79	
	VUS 1" (OD 28,6 mm)		571780	186,79	
	VUS 1½" (OD 34,9 mm)		571785	186,79	
	VUS 1½" (OD 41,3 mm)		571790	360,13	
	VUS 2" (OD 54,0 mm)		571795	370,51	
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58	
Viega ProPress 316 (ASTM) ⁽³⁾	VUS ½" (OD 15,9 mm)		571770	186,79	
	VUS ¾" (OD 22,2 mm)		571775	186,79	
	VUS 1" (OD 28,6 mm)		571780	186,79	
	VUS 1½" (OD 34,9 mm)		571785	186,79	
	VUS 1½" (OD 41,3 mm)		571790	360,13	
	VUS 2" (OD 54,0 mm)		571795	370,51	
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58	
Viega ProPress WATER System AUS	VAU 15 (OD 12,7 mm)		572687	159,80	
	VAU 20 (OD 19,1 mm)		572689	159,80	
	VAU 25 (OD 25,4 mm)		572691	159,80	
	VAU 32 (OD 31,8 mm)		572693	168,10	
	VAU 40 (OD 38,1 mm)		572695	249,07	
	VAU 50 (OD 50,8 mm)		572697	441,10	
Viega ProPressG GAS System AUS	VAU 15 (OD 12,7 mm)		572687	159,80	
	VAU 20 (OD 19,1 mm)		572689	159,80	
	VAU 25 (OD 25,4 mm)		572691	159,80	
	VAU 32 (OD 31,8 mm)		572693	168,10	
	VAU 40 (OD 38,1 mm)		572695	249,07	
	VAU 50 (OD 50,8 mm)		572697	441,10	
Viega Raxinox	VRX 16		571750	196,13	
	VRX 20		571752	196,13	
Viega Raxofix	VRX 16		571750	196,13	
	VRX 20		571752	196,13	
	VRX 25		571754	214,81	
	VRX 32		571756	214,81	
	VRX 40		571758	298,89	
	VRX 50		571760	348,72	
Viega Sanfix ⁽²⁾	VP 16/17 ⁽³⁾		570910	185,75	
	VP 20 ⁽³⁾		570915	185,75	
	VP 25 ⁽³⁾		570920	185,75	
	VP 32		570925	205,47	
	VP 40 (PZ-4G)		570970	493,00	
	VPz 50 (PZ-S)		572350	645,58	
Viega Sanfix Fosta ⁽³⁾	VP 16/17 ⁽³⁾		570910	185,75	
	VP 20 ⁽³⁾		570915	185,75	
	VP 25 ⁽³⁾		570920	185,75	
	VP 32		570925	205,47	
	VP 40 (PZ-4G)		570970	493,00	
	VPz 50 (PZ-S)		572350	645,58	
Viega Sanpress	V 12		570107	154,61	
	V 15		570115	154,61	
	V 18		570125	154,61	
	V 22		570135	154,61	
	V 28		570145	154,61	
	V 35		570155	154,61	
Viega Sanpress Inox	V 42		570165	360,13	
	V 42 (PR-2B)	Z2	572850 R	322,77	
	V 54		570175	370,51	
	V 54 (PR-2B)	Z2	572851 R	348,72	
	VR 76,1 (PR-3B) ⁽⁴⁾	Z5	572822 R	609,25	
	VR 88,9 (PR-3B) ⁽⁴⁾	Z5	572823 R	645,58	
	VR 108,0 (PR-3B) ⁽⁴⁾	Z5	572824 R	645,58	
	V 12 S (PR-2B)	Z8	574748 R	124,51	
	V 15 S (PR-2B)	Z8	574752 R	124,51	
	V 18 S (PR-2B)	Z8	574756 R	124,51	
	V 22 S (PR-2B)	Z8	574758 R	124,51	
	V 28 S (PR-2B)	Z8	574760 R	124,51	
	V 35 S (PR-2B)	Z8	574762 R	136,96	
	Viega Sanpress Inox G	V 15		570115	154,61
		V 18		570125	154,61
		V 22		570135	154,61
		V 28		570145	154,61
		V 35		570155	154,61
V 42			570165	360,13	
V 42 (PR-2B)		Z2	572850 R	322,77	
V 54			570175	370,51	
V 54 (PR-2B)		Z2	572851 R	348,72	
Vfz 64,0 (PR-3B) ⁽⁴⁾		Z5	572815 R	609,25	
Vfz 76,1 (PR-3B) ⁽⁴⁾		Z5	572816 R	609,25	
Vfz 88,9 (PR-3B) ⁽⁴⁾		Z5	572817 R	645,58	
Vfz 108,0 (PR-3B) ⁽⁴⁾		Z5	572818 R	645,58	
V 15 S (PR-2B)		Z8	574752 R	124,51	
V 18 S (PR-2B)		Z8	574756 R	124,51	
V 22 S (PR-2B)		Z8	574758 R	124,51	
V 28 S (PR-2B)		Z8	574760 R	124,51	
V 35 S (PR-2B)		Z8	574762 R	136,96	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	€
Viega Smartpress	VX 16"		571635	214,81
	VX 20"		571640	214,81
	VX 25"		571645	214,81
Viega Temponox	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816 R	609,25
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817 R	645,58
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818 R	645,58
Viessmann	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
	TH 14"		570455	186,32
	TH 16"		570460	186,32
	TH 20"		570470	186,32
	TH 26"		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	Vogel & Noot EASYTEC	TH 16"		570460
TH 20"			570470	186,32
TH 26"			570475	186,32
TH 32			570480	186,32
TH 40			570485	246,99
TH 50 (PZ-S)			572400	645,58
VSH	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	> Aalberts integrated piping systems			

W

Watts MTR Art press	TH 16"		570460	186,32
	TH 20"		570470	186,32
	TH 26"		570475	186,32
	TH 32		570480	186,32
WATTS Radiant	US ¾"		571450	211,70
	US ½"		571455	211,70
	US ¾"		571460	211,70
	US 1"		571465	211,70
	US 1 ¼"		571470	211,70
	US 1 ½"		571475	211,70
Watts WaterPEX RadiantPEX	US ¾"		571450	211,70
	US ½"		571455	211,70
	US ¾"		571460	211,70
	US 1"		571465	211,70
	US 1 ¼"		571470	211,70
	US 1 ½"		571475	211,70
Watts RadiantPEX-AL	U 16 (½")		570765	174,33
	U 20 (¾")		570775	174,33
	U 25 (¾")		570780	174,33
	U 32 (1")		570785	204,43
Wavin Tigris K1/M1	U 50		570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
	U 63 (PZ-S)		572365	645,58
Wavin Tigris K5/M5	U 75 (PR-3B)	Z4	572828 R	645,58
	B 16"		570850	203,40
	B 20"		570860	203,40
	B 32		570880	224,16
	H 16"		570320	168,10
	H 20"		570350	168,10
	H 25"		570360	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	TH 16"		570460	186,32
	TH 20"		570470	186,32
	TH 25"		570495	186,32
Watts RadiantPEX-AL	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16"		570765	174,33
	U 20"		570775	174,33
	U 25"		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	UP 16"		572632	174,33
UP 20"		572636	174,33	
UP 25		572638	174,33	
UP 32		572640	204,43	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	€
WEECON	M 15		570110	154,61	X				
PRESS-C-Stahl	M 18		570120	154,61					
	M 22		570130	154,61	XtraConnect	F 16*		570717	177,45
	M 28		570140	154,61		F 20*		570727	177,45
	M 35		570150	154,61		F 26*		570730	191,98
	M 42 (PZ-4G)		570160	498,19		F 32		570735	191,98
	M 54 (PZ-4G)		570170	498,19		F 16 S (PR-2B)**	Z8	574728 R	124,51
	M 42 (PR-3S)	Z2	572706 R	672,57		F 20 S (PR-2B)**	Z8	574730 R	124,51
	M 54 (PR-3S)	Z2	572708 R	672,57		F 26 S (PR-2B)**	Z8	574732 R	124,51
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47		F 32 S (PR-2B)	Z8	574734 R	136,96
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58		H 16*		570320	168,10
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58		H 20*		570350	168,10
	M 15 S (PR-2B)	Z8	574738 R	124,51		H 26*		570370	168,10
	M 18 S (PR-2B)	Z8	574740 R	124,51		H 32		570380	168,10
	M 22 S (PR-2B)	Z8	574742 R	124,51		TH 16*		570460	186,32
	M 28 S (PR-2B)	Z8	574744 R	124,51		TH 20*		570470	186,32
	M 35 S (PR-2B)	Z8	574746 R	136,96		TH 26*		570475	186,32
WEECON	M 15		570110	154,61		TH 32		570480	186,32
PRESS-Edelstahl	M 18		570120	154,61		TH 16 S (PR-2B)**	Z8	574782 R	124,51
	M 22		570130	154,61		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	M 28		570140	154,61		TH 26 S (PR-2B)**	Z8	574794 R	124,51
	M 35		570150	154,61		TH 32 S (PR-2B)	Z8	574798 R	136,96
	M 42 (PZ-4G)		570160	498,19		U 16*		570765	174,33
	M 54 (PZ-4G)		570170	498,19		U 20*		570775	174,33
	M 42 (PR-3S)	Z2	572706 R	672,57	(DN 26)	U 25*		570780	174,33
	M 54 (PR-3S)	Z2	572708 R	672,57		U 32		570785	204,43
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101 R	1.161,47		VP 16*		570910	185,75
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110 R	1.355,58		VP 20*		570915	185,75
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111 R	1.355,58		VP 32		570925	205,47
	M 15 S (PR-2B)	Z8	574738 R	124,51	Z				
	M 18 S (PR-2B)	Z8	574740 R	124,51					
	M 22 S (PR-2B)	Z8	574742 R	124,51	ZEWOTHERM	TH 12*		570452	186,32
	M 28 S (PR-2B)	Z8	574744 R	124,51	Zewo Press Premium	TH 16*		570460	186,32
	M 35 S (PR-2B)	Z8	574746 R	136,96		TH 17*		570462	186,32
WEECON	V 15		570115	154,61		TH 18*		570465	186,32
PRESS-S-Kupfer	V 18		570125	154,61		TH 20*		570470	186,32
	V 22		570135	154,61		TH 26*		570475	186,32
	V 28		570145	154,61		TH 32		570480	186,32
	V 35		570155	154,61		TH 40		570485	246,99
	V 42		570165	360,13		TH 50 (PZ-S)		572400	645,58
	V 42 (PR-2B)	Z2	572850 R	322,77		TH 63 (PZ-S)		572405	645,58
	V 54		570175	370,51		TH 12 S (PR-2B)**	Z8	574776 R	124,51
	V 54 (PR-2B)	Z2	572851 R	348,72		TH 16 S (PR-2B)**	Z8	574782 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51		TH 17 S (PR-2B)**	Z8	574784 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51		TH 18 S (PR-2B)**	Z8	574786 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51		TH 26 S (PR-2B)**	Z8	574794 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96		TH 32 S (PR-2B)	Z8	574798 R	136,96
WEM	U 16*		570765	174,33	ZEWOTHERM	TH 16*		570460	186,32
WIELAND-WERKE	TH 14 ²⁾		570455	186,32	Zewo Press PPSU	TH 20*		570470	186,32
cuprotherm CTX ²⁾	TH 16 ²⁾		570460	186,32		TH 26*		570475	186,32
WKS-Press	TH 14*		570455	186,32		TH 32		570480	186,32
	TH 16*		570460	186,32		TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 17*		570462	186,32		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 20*		570470	186,32		TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 26*		570475	186,32		TH 32 S (PR-2B)	Z8	574798 R	136,96
	TH 32		570480	186,32	ZURN	US ¾**		571450	211,70
	TH 40		570485	246,99	INDUSTRIES	US ½**		571455	211,70
WÜRTH	TH 16*		570460	186,32	ZURN PEX	US ¾**		571460	211,70
Würth	TH 20*		570470	186,32		US 1**		571465	211,70
	TH 26*		570475	186,32		US 1 ¼**		571470	211,70
	HE 32		571900	223,12		US 1 ½*		571475	211,70
	HEz 40		571904	323,80		US 2*		571477	285,40

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC, see page 188.

⁴⁾ Driven by REMS Akku-Press XL 45kN 22V ACC, see page 196.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

¹¹⁾ Only use pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

For REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

Description	Art.-No.	€
Adapter tongs Z8 for driving REMS pressing rings S (PR-2B)	574702R	144,28
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795R	144,28
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801RX	310,36
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802RX	310,36
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120R	373,68
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22V ACC	579123R	394,44
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1½")/cropping tongs and compartment for pipe cutter up to 42 mm	570295R	96,53
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40 A, VUS 1½", VUS 2")	570290R	96,53
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810R	96,53
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/VUSFz 2½–4" (PR-3B) or for adapter tongs Z5 and 1 pressing tong VMPz 1½ (PZ-S) and 2 pressing rings VMPz 1½–2" (PR-3B)	572809R	110,03
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516R	96,53
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704R	146,36
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings S (PR-2B)	571136R	146,36
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137R	146,36
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603R	248,08
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813R	55,01

