

REMS Lumen 5000/7000/10000

Electric LED flood light

Powerful, electric LED flood light with high light intensity. For the building site and the workshop.

REMS Lumen 5000

Light flux 5000 lm

REMS Lumen 7000

Light flux 7000 lm

REMS Lumen 10000

Light flux brightness stage 1 5000 lm

Light flux brightness stage 2 10000 lm

REMS Lumen 5000/7000/10000 – electric lighting.
With high light intensity. Handy, light.
Continuous swivel.

Universal use


Powerful, mobile, electric LED flood light with high light intensity for universal use on the building site or in the workshop. REMS Lumen 10000 with 2 selectable brightness stages for any application purpose.

Design

Handy, light, electric LED flood light. REMS Lumen 5000 only 1.8 kg, REMS Lumen 7000 only 2.2 kg, REMS Lumen 10000 only 3.0 kg. Impact-resistant aluminium housing, dust-proof, protected against water jets from all directions. LEDs protected by impact-resistant, unbreakable acrylic glass. Flood light housing swivels through 360°, fixable by star grips, for optimum alignment of the light. On/Off switch. Tubular steel frame with rubber feet for a firm stand. Practical, non-slip handle. Practical, sturdy, telescopic tripod stand, only 1.9 kg, for accurate positioning of the LED flood light, adjustable height from 615 to 1,590 mm above floor level, collapsible for easy transport, as an accessory.

LED flood light

Modern, energy-saving LED flood light with high light intensity. Lights immediately without switch-on delay. Brightness of the LEDs in REMS Lumen 10000 selectable in 2 stages. 120° radiation angle for good illumination. Colour temperature 5,000 K. Efficient heat dissipation by high-quality, aluminium, ribbed heat sinks. Overheating regulates the power supply automatically, for continuous operation.

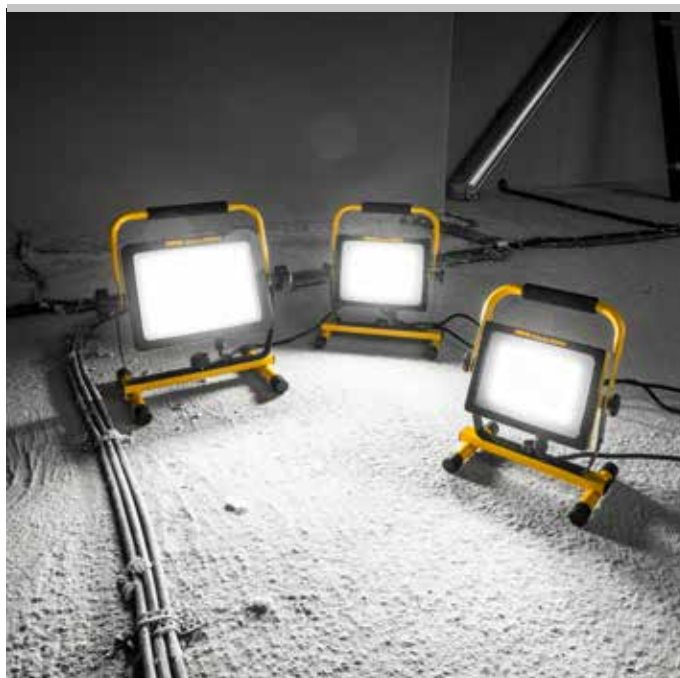

Info



Supply format

REMS Lumen. Electric LED flood light with high light intensity. 230V, 50–60 Hz. 5 m connecting lead. In a carton.

Description	Light flux ≤ lm	Power ≤ W	Art.-No.	€
Lumen 5000	5000	50	175220R220G	82.00
Lumen 7000	7000	70	175221R220G	98.61
Lumen 10000	10000	100	175222R220G	123.52

Other voltages on request.

Accessories

Description	Art.-No.	€
REMS 3B telescopic stand , on a tripod, height-adjustable, collapsible	175230R	31.04

