


## REMS dies (set)

The proven REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for materials < 500 N/mm<sup>2</sup> (MPa) for extremely long die life.


Dies for other threads (e.g. BSW) on request. HSS dies for materials that are difficult to cut ≥ 500 N/mm<sup>2</sup> (MPa) 50 % surcharge.

<sup>1)</sup> Some dies only available in HSS.

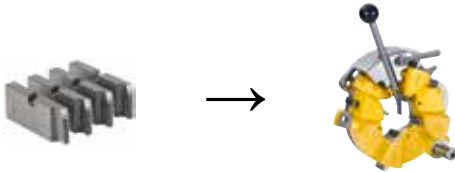


### For universal automatic die head 1/16 – 2"

Thread type	Size	Art.-No.	€
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 1/16 – 1/8 HSS <sup>1)</sup>	341401RHSS	<b>492.01</b>
	R 1/4 – 3/8	341402RWS	<b>328.01</b>
	R 1/2 – 3/4	341403RWS	<b>328.01</b>
	R 1 – 2	341404RWS	<b>328.01</b>
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 1/16 – 1/8	341406RWS	<b>373.68</b>
	G 1/4 – 3/8	341407RWS	<b>373.68</b>
	G 1/2 – 3/4	341408RWS	<b>373.68</b>
	G 1 – 2	341409RWS	<b>373.68</b>
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 1/16 – 1/8 HSS <sup>1)</sup>	341411RHSS	<b>492.01</b>
	NPT 1/4 – 3/8	341412RWS	<b>328.01</b>
	NPT 1/2 – 3/4	341413RWS	<b>328.01</b>
	NPT 1 – 2	341414RWS	<b>328.01</b>
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 1/8	341416RWS	<b>373.68</b>
	NPSM 1/4 – 3/8	341417RWS	<b>373.68</b>
	NPSM 1/2 – 3/4 HSS <sup>1)</sup>	341418RHSS	<b>560.52</b>
	NPSM 1 – 2 HSS <sup>1)</sup>	341419RHSS	<b>560.52</b>
Conduit threads Pg DIN 40430	Pg 7	341466RWS	<b>373.68</b>
	Pg 9	341467RWS	<b>373.68</b>
	Pg 11	341468RWS	<b>373.68</b>
	Pg 13.5	341469RWS	<b>373.68</b>
	Pg 16	341470RWS	<b>373.68</b>
	Pg 21	341471RWS	<b>373.68</b>
	Pg 29	341472RWS	<b>373.68</b>
	Pg 36	341473RWS	<b>373.68</b>
	Pg 42	341474RWS	<b>373.68</b>
	Pg 48	341475RWS	<b>373.68</b>
Conduit threads M EN 60423	M 16 x 1.5	341493RWS	<b>373.68</b>
	M 20 x 1.5	341494RWS	<b>373.68</b>
	M 25 x 1.5	341495RWS	<b>373.68</b>
	M 32 x 1.5	341496RWS	<b>373.68</b>
	M 40 x 1.5	341497RWS	<b>373.68</b>
	M 50 x 1.5	341498RWS	<b>373.68</b>
	M 63 x 1.5	341499RWS	<b>373.68</b>
Metric bolt threads M ISO 261 (DIN 13)	M 6	341426RWS	<b>373.68</b>
	M 8	341427RWS	<b>373.68</b>
	M 10	341428RWS	<b>373.68</b>
	M 12	341429RWS	<b>373.68</b>
	M 14	341430RWS	<b>373.68</b>
	M 16	341431RWS	<b>373.68</b>
	M 18	341432RWS	<b>373.68</b>
	M 20	341433RWS	<b>373.68</b>
	M 22	341434RWS	<b>373.68</b>
	M 24	341435RWS	<b>373.68</b>
	M 27	341436RWS	<b>373.68</b>
	M 30	341437RWS	<b>373.68</b>
	M 33	341438RWS	<b>404.82</b>
	M 36	341439RWS	<b>404.82</b>
	M 39	341440RWS	<b>404.82</b>
	M 42	341441RWS	<b>404.82</b>
	M 45	341442RWS	<b>404.82</b>
	M 48	341443RWS	<b>404.82</b>
	M 52	341444RWS	<b>404.82</b>
	M 56 HSS <sup>1)</sup>	341445RHSS	<b>607.23</b>
M 60 HSS <sup>1)</sup>	341446RHSS	<b>607.23</b>	
Bolt threads UNC Unified Inch Screw Thread ASME B1.1	UNC 1/4 – 20 HSS <sup>1)</sup>	341476RHSS	<b>560.52</b>
	UNC 5/16 – 18	341477RWS	<b>373.68</b>
	UNC 3/8 – 16 HSS <sup>1)</sup>	341478RHSS	<b>560.52</b>
	UNC 7/16 – 14	341479RWS	<b>373.68</b>
	UNC 1/2 – 13 HSS <sup>1)</sup>	341480RHSS	<b>560.52</b>
	UNC 9/16 – 12	341481RWS	<b>373.68</b>
	UNC 5/8 – 11 HSS <sup>1)</sup>	341482RHSS	<b>492.01</b>
	UNC 3/4 – 10 HSS <sup>1)</sup>	341483RHSS	<b>492.01</b>
	UNC 7/8 – 9 HSS <sup>1)</sup>	341484RHSS	<b>492.01</b>
	UNC 1 – 8 HSS <sup>1)</sup>	341485RHSS	<b>492.01</b>
	UNC 1 1/8 – 7	341486RWS	<b>328.01</b>
	UNC 1 1/4 – 7 HSS <sup>1)</sup>	341487RHSS	<b>492.01</b>
	UNC 1 3/8 – 6	341488RWS	<b>404.82</b>
	UNC 1 1/2 – 6 HSS <sup>1)</sup>	341489RHSS	<b>607.23</b>
UNC 1 3/4 – 5	341490RWS	<b>328.01</b>	
UNC 2 – 4.5	341491RWS	<b>328.01</b>	

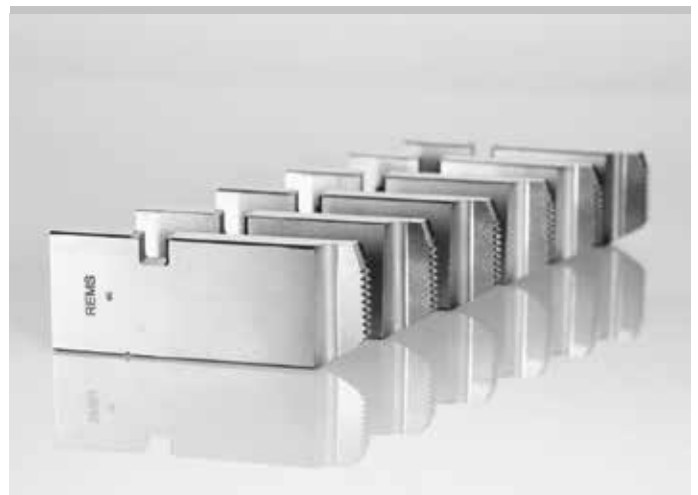


German Quality Product

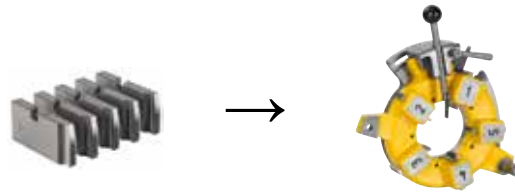

### For universal automatic die head 2 1/2 – 3"

Thread type	Size	Art.-No.	€
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 2 1/2 – 3	381430RWS	<b>456.72</b>
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 2 1/2 – 3 HSS <sup>1)</sup>	381431RHSS	<b>739.06</b>
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 2 1/2 – 3 HSS <sup>1)</sup>	381432RHSS	<b>685.08</b>
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 2 1/2 – 3 HSS <sup>1)</sup>	381433RHSS	<b>739.06</b>

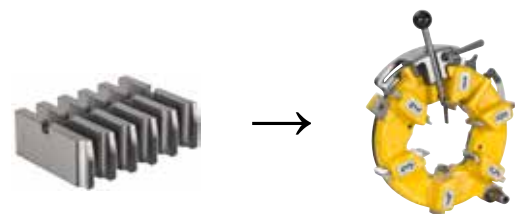

### For universal automatic die head 2 1/2 – 4"

Thread type	Size	Art.-No.	€
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 2 1/2 – 4	381401RWS	<b>689.23</b>
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G 2 1/2 – 4 HSS <sup>1)</sup>	381405RHSS	<b>1,098.20</b>
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 2 1/2 – 4 HSS <sup>1)</sup>	381410RHSS	<b>1,033.85</b>
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 2 1/2 – 4 HSS <sup>1)</sup>	381415RHSS	<b>1,098.20</b>