

## REMS dry diamond core drilling crowns LS

For REMS Picus DP and other suitable makes

High quality dry diamond core drilling crowns. Laser welded. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material.

Concrete, steel-reinforced concrete, aggregate concrete, brick, clinker, all kinds of masonry, natural stone, asphalt, all kinds of screed and other  $\varnothing$  32 – 202 mm

### REMS dry diamond core drilling crowns LS – Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, hand held or with drill stand.

Single connecting thread UNC 1 1/4 female. Drilling depth 320 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with diamonds positioned in the bonding agent. For fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Driven by a REMS Picus DP drive unit and suitable drive units of other makes with UNC 1 1/4 outer connecting thread.


Use REMS Pull 2 M for high-performance extraction of drilling dusts from the drilling gap during dry drilling (page 324). The REMS Pull 2 M safety vacuum cleaner is certified for extracting health hazardous dusts of dust class M.

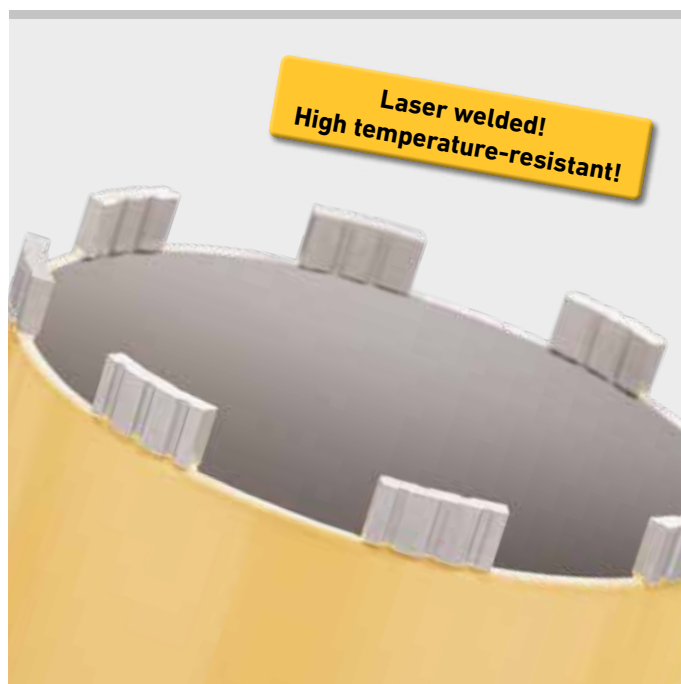

### Supply format

REMS dry diamond core drilling crowns LS. Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1 1/4 female. Drilling depth 320 mm. In a carton.

$\varnothing$ x drilling depth x connection	Number of segments	Art.-No.	€
TDKB LS 32 x 320 x UNC 1 1/4	3	181500R	172,26
TDKB LS 42 x 320 x UNC 1 1/4	4	181502R	160,84
TDKB LS 52 x 320 x UNC 1 1/4	5	181504R	171,22
TDKB LS 62 x 320 x UNC 1 1/4	5	181506R	186,79
TDKB LS 72 x 320 x UNC 1 1/4	6	181508R	211,70
TDKB LS 82 x 320 x UNC 1 1/4	6	181510R	229,35
TDKB LS 92 x 320 x UNC 1 1/4	6	181512R	258,41
TDKB LS 102 x 320 x UNC 1 1/4	7	181514R	264,64
TDKB LS 112 x 320 x UNC 1 1/4	7	181516R	279,17
TDKB LS 122 x 320 x UNC 1 1/4	8	181532R	320,69
TDKB LS 127 x 320 x UNC 1 1/4	8	181518R	332,11
TDKB LS 132 x 320 x UNC 1 1/4	8	181520R	341,45
TDKB LS 142 x 320 x UNC 1 1/4	8	181522R	365,32
TDKB LS 152 x 320 x UNC 1 1/4	8	181524R	406,84
TDKB LS 162 x 320 x UNC 1 1/4	9	181526R	431,76
TDKB LS 182 x 320 x UNC 1 1/4	9	181528R	476,39
TDKB LS 202 x 320 x UNC 1 1/4	10	181530R	504,42

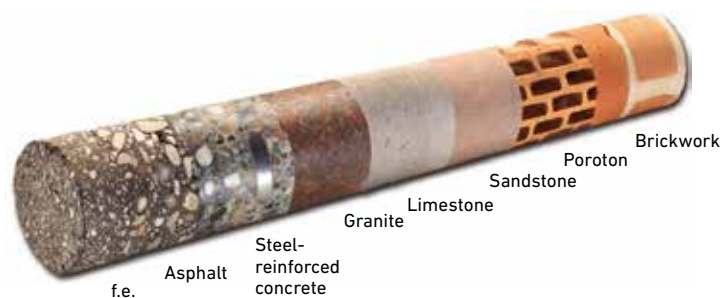

### Accessories

Description	Art.-No.	€
Light loosening ring, for light loosening of the diamond core crown	180015	20,66
Drilling crown extension 200 mm	180155R	61,19
Sharpening stone for diamond core drilling crowns	079012	64,67
Single open ended wrench size 41 for UDKB	079003	38,35

Additional adapters for using REMS dry diamond core drilling crowns LS in drive machines of other makes, on request.

