Compact, handy cordless tool for producing compression sleeve joints with crimping sleeve. Li-Ion 22V Technology. For battery and corded operation.

Axial compression

Ø 12-32 mm

REMS Ax-Press 30 22V – up to Ø 32 mm. Ultra light, ultra small, ultra handy, ultra fast. Li-Ion 22V, 2.5 Ah, 54 Wh battery for approx. 220 pressings Georg Fischer pfci ALUPEX-EXPRESS Ø 16 mm with one battery charge\*.

# Compression heads for all common systems

Complete assortment of REMS compression heads for all common compression sleeve systems with crimping sleeve. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and correspond to the respective compression sleeve system. Thus perfect system-conformity, safe jointing.

## Design

Compact, handy, light. Drive unit with battery only 4.6 kg. Vertically from the drive unit located pressing device for seating the compression heads. Can be used anywhere, free hand, over head, in confined spaces. Optimum weight distribution for one-hand operation. Drive unit with inserted compression heads can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. LED work light for illuminating the work place. Compression heads and expander heads quickly interchangeable, without tools. Secure spring lock seating of compression heads.

## **Drive**

High pressing force for perfect pressing in seconds, e.g. Ø 26 mm in only 5 s. Thrust force 30 kN. Powerful electro-hydraulic drive, eccentric reciprocating pump with robust planetary gear. Powerful electro-hydraulic drive with powerful battery motor 22V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

#### **Battery or mains operation**

REMS Li-lon 22 V Technology, see page 20–25. Highly resistant Li-lon 22 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 22 V, 2.5 Ah, 54 Wh battery for approx. 220 pressings, 4.4 Ah, 95 Wh for approx. 380 pressings, 5.0 Ah, 108 Wh for approx. 430 pressings, 9.0 Ah, 194 Wh for approx. 780 pressings Georg Fischer pfci ALUPEX-EXPRESS Ø 16 mm with one battery charge\*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100-240 V, 90 W, 22 V or 290 W, 22 V, for shorter charging times, as accessory. Voltage supply 220-240 V, 22 V, 15 A output, for mains operation instead of Li-lon battery 22 V, as accessory.

# Supply format

**REMS Ax-Press 30 22V.** Cordless axial press 30 kN for producing compression sleeve joints with crimping sleeve Ø 12–32 mm. Electro-hydraulic drive with powerful battery motor 22V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch. LED work light. In L-Boxx system case.

	,		
Description	Version	ArtNo.	€
Basic-Pack\P	without battery, without rapid charger	573036R22	1.700,00
Basic-Pack	with battery Li-lon 22V, 2.5 Ah, 54 Wh,rapid charger 220 – 240 V, 50 – 60 Hz, 70 W, 22 V	573037R220	2.230,00

Other voltages on request.



German Quality Product








#### Accessories

Description	ArtNo.	€
Ax-Press 30 22 V drive unit, without battery	573008R22	1.600,00
Power-Pack 22 V 2.5 Ah + 2.5 Ah + 90 W, 108 Wh, consisting of 2 batteries Li-lon 22 V, 2.5 Ah, 54 Wh, rapid charger 100 – 240 V, 50 – 60 Hz, 90 W, 22 V	571590R220	657,00
Battery Li-lon 22 V, 2.5 Ah, 54 Wh	571571 R22	229,00
For other batteries Li-lon 22 V/Power-Packs 22 V see	page 20-25.	
For rapid chargers / voltage supplies see page 20-25	5.	
L-Boxx system case with inserts	573270R	149,00
REMS Lumen 2800 22 V, cordless LED flood light, see	page 119	

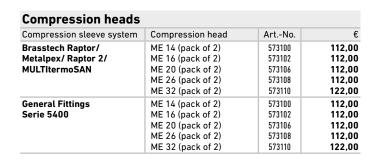



Compression heads					
Compression sleeve system	Compression head	ArtNo.	€		
Georg Fischer pfci	ME 16 (pack of 2)	573102	112,00		
ALUPEX-EXPRESS/	ME 20 (pack of 2)	573106	112,00		
Alupex Gas System	ME 26 (pack of 2)	573108	112,00		
Logstor	ME 16 (pack of 2)	573102	112,00		
	LR 20 (pack of 2)	573430	112,00		
	LR 22 (pack of 2)	573432	112,00		
	LR 25 (pack of 2)	573434	112,00		
	LR 28 (pack of 2)	573436	112,00		
	LR 32 (pack of 2)	573438	122,00		