

Powerful, compact electric tool for efficient machining of T-branches of hard and soft tubes for tube installations without fittings.

Hard and soft copper tubes \varnothing 10 – 22 mm
 \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ "
 $s \leq 1.5$ mm

REMS Hurrican – for making T-branches yourself.
Inexpensive. Also on tubes already installed.

System advantage

Only **one** type of extractor tools for REMS Hurrican H, REMS Hurrican and REMS Twist/Hurrican. Simple, inexpensive storage. No confusion possible.

Cost advantage

No costs for T-branches, storage, procurement. Savings in soldering joints, soldering material and working hours. Higher safety by fewer tube joints.

Design

Compact, handy, light. Can be used anywhere, free-hand, on pipes already installed. Drill head provides precise drilling without punching with any standard power drill. Drill depth-stop according to the size of T-branch. Tool holder for holding the extractor tools. Limitation of insertion depth to avoid obstruction by using the dimpling pliers. Handy grip wrench for clamping the tool holder onto the pipe.

Drive


Proven drive unit with hexagon mount. Enormously powerful. Handy, light, only 1.5 kg. Can be used anywhere, free-hand, also on pipes already installed. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 630 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed can be continuously controlled electronically by variable pressure on the safety switch from 0 to 1,000 rpm (accelerator switch).

Extractor tools

Special design of extractor tools facilitate even and smooth material deformation without burrs and notches. Therefore no secondary treatment required.

REMS Twist/Hurrican

Space and weight-saving combination set for efficient production of T-branches and for efficient cold-expanding of hard and soft tubes for installations without fittings. Only one drive unit for expanding and extracting tools. Price advantage! See page 281.

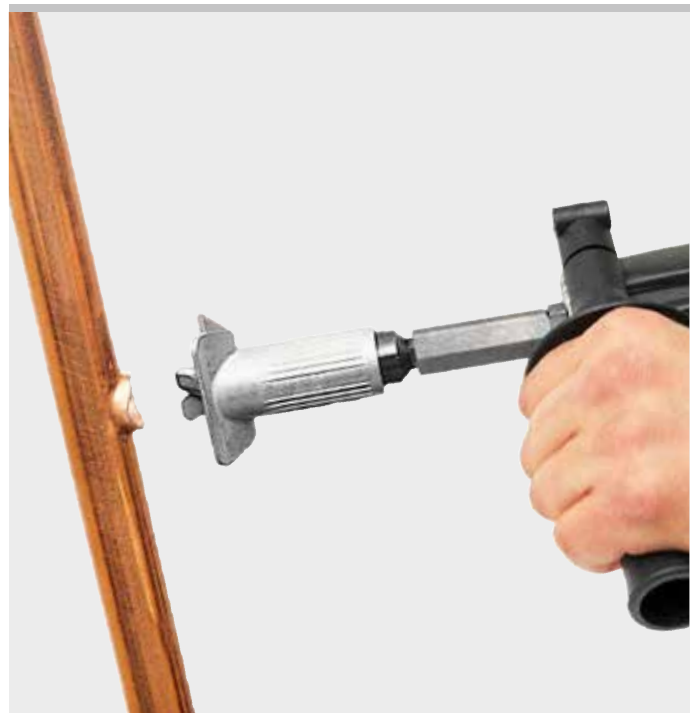

German Quality Product



Supply format

REMS Hurrican Set. Electric tube extractor for hard and soft copper tube \varnothing 10 – 22 mm, \varnothing $\frac{3}{8}$ – $\frac{7}{8}$ ", $s \leq .5$ mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50 – 60 Hz, 630 W. High torque at low speed, left and right-hand rotation. Safety tip switch. Continuous, electronic speed control from 0 to 1,000 rpm (accelerator switch). Drive holder. Tool holder, drill head, dimpling pliers, lubricant. Extractor tools for pipes in mm or inch. In L-Boxx system case.

Description	Art.-No.	€
Set 12 + 15 + 18 + 22	151011R220	1.060,00
Set 12 + 14 + 16 + 18 + 22	151012R220	1.130,00
Set $\frac{3}{8}$ + $\frac{1}{2}$ + $\frac{5}{8}$ + $\frac{3}{4}$ + $\frac{7}{8}$"	151013R220	1.140,00

Other voltages on request.

Accessories

Description	Tubes \varnothing mm/inch	Art.-No.	€
Extractor tool	10	151105R	70,30
	12	151110R	70,30
	14	151120R	70,30
	15	151125R	70,30
	16	151130R	70,30
	18	151140R	70,30
	20	151145R	70,30
	22	151150R	70,30
	$\frac{3}{8}$ "	151155R	74,30
	$\frac{1}{2}$ "	151160R	72,30
	$\frac{5}{8}$ "	151165R	72,30
	$\frac{3}{4}$ "	151170R	72,30
	$\frac{7}{8}$ "	151175R	72,30
Twist/Hurrican drive unit with stabiliser		151402R220	385,00
Tool holder		151200R	88,40
Drill head		151210RMM	133,00
Dimpling pliers		151230R	41,90
Lubricant (tin)		151240	9,70
L-Boxx system case with inserts		151605R	149,00

