
Effort-saving, oil-hydraulic hand pipe bender for dimensionally accurate bending of pipes up to 90°. Ideal for on-site work.

Soft copper pipes, also thin-walled	Ø 10 – 22 mm Ø $\frac{3}{8}$ – $\frac{7}{8}$ " s ≤ 1 mm
Coated soft copper tubes	Ø 10 – 18 mm Ø $\frac{3}{8}$ – $\frac{5}{8}$ " s ≤ 1 mm
Pipes of press fitting systems made of:	
stainless steel, nickel steel	Ø 15 – 22 mm
	s ≤ 1.2 mm
Caft anatad and an about	C 40 40
Soft, coated carbon steel	Ø 12 – 18 mm
Soft, coated carbon steel	Ø 12 – 18 mm s ≤ 1.2 mm
Soft, coated carbon steel Soft precision steel tubes	2
·	s ≤ 1.2 mm
<u> </u>	s ≤ 1.2 mm Ø 10 – 22 mm



Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

Cost advantage


Bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Robust, compact drive unit with closed, maintenance-free hydraulic system. Handy and light, only 2.4 kg. Can be used anywhere, even in confined spaces. Easy, quick working, e.g. Ø 22 mm copper pipe bend in just 18 s. Marked bending formers for exact bending. Overbend, tier bend possible. Easy and rapid changing of bending formers. Back former support H-S Ø $10-26\,\mathrm{mm}$, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø $10-26\,\mathrm{mm}$, %-%". Back former support Ø 32 mm with back formers for pipes Ø 32 mm. Device H-S for reverse bending on laid pipes up to Ø 26 mm, %", as accessory.

Bending formers and sliding pieces

Bending formers and back formers made of high strength, high sliding, glass fibre reinforced polyamide or aluminium bending formers. Angle scale on each bending former for dimensionally accurate bending. See table on page 141 for bending formers.

Oil-hydraulic drive unit with hydraulic cylinder made from high-quality, rolled hydraulic tube. Ergonomically designed thrust lever for strength saving pressure build-up with manual hydraulic pump. Reliable hydraulic thrust with overload protection in the foremost piston position and overpressure valves for safe working.

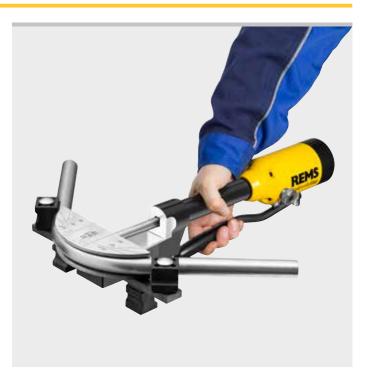









German Quality Product





REMS Hydro-Swing INOX Set. REMS Hydro-Swing with aluminium bending

formers, especially also for Geberit Mapress Stainless Steel (EN 10088, 1.4401), Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free),

Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)),

Viega Sanpress (EN 10088, 1.4401), Viega Prestabo (EN 10305-3, 1.0308 (E235)).

7.0ga : .00tabo (2.1 .0000 o,0000 (2200/).	•	
Description mm	ArtNo.	€
Set 15 + 18 + 22	153510R	795,00



Supply format

REMS Hydro-Swing Set. Oil-hydraulic hand pipe bender Ø 10-32 mm, Ø %-%", up to 90° . Soft copper pipes Ø 10-22 mm, Ø %-%", $s \le 1$ mm, soft, coated copper pipes Ø 10-18 mm, Ø %-%", $s \le 1$ mm, pipes of the press fitting systems made of soft, coated carbon steel Ø 12−18 mm, s≤1.2 mm, soft precision steel pipes \emptyset 10 – 18 mm, s \leq 1.5 mm, composite tubes \emptyset 14 – 32 mm. Up to \emptyset 26 mm with drive unit, polyamide bending formers, back former support H-S Ø $10-26\,\mathrm{mm}$ with back formers, in a sturdy case. Up to \emptyset 32 mm with drive unit, polyamide bending formers, 2 back former supports Ø $10-26\,\mathrm{mm}$ and Ø $32\,\mathrm{mm}$ with back formers,

Description mm	inch	ArtNo.	€
Set 12 + 15 + 18 + 22	1/2 + 5/8 + 3/4 + 7/8"	153525RX	724,00
Set 10 + 12 + 15 + 18 + 22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153521 RX	749,00
Set 12 + 14 + 16 + 18 + 22	1/2 + 3/4 + 7/8"	153520RX	749,00
Set 14+16+20+25/26		153526R	719,00
Set 14+16+18+20+25/26		153522R	749,00
Set 16 + 20 + 25/26 + 32		153529 R	799,00
Set Allround 22 10+12+14+15+16+17+18+20+22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153527RX	779,00
Set 16+18+20+25/26+32		153523R	829,00
Set Allround 32 10+12+14+15+16+17+18+20+22+	2/ 1/ 5/ 2/ 7/1	450500.DV	070.00
25/26+32	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153528RX	879,00



Accessories

Description					ArtNo.	€				
Hydro-Swing drive unit						153500 R	590,00			
Back former support H-S Ø 10 – 26 mm with back formers for pipe Ø 10 – 26 mm, $\frac{3}{6} - \frac{7}{8}$ "							153501R	71,80		
Back former support Ø 32 mm with back formers for pipe Ø 32 mm						153115RX2	138,10			
Device H-S for reverse bending on laid pipes up to Ø 26 mm, %"						153450R	247,00			
Case with inlay							153570R	112,00		
	e			suitable for						
Bending former for tubes Ø mm/inch	R ¹⁾ mm	Bending former material	Cu	Cu-U	St 10217	St 10305	St 10305-U	>		
10, 3/8"	30	Р	•			•			153155R	33,20
12, 10 U, ½"	36	Α	•	•	•	•			153530R	76,10
12, 10 U, ½"	36	Р	•	•		•			153160R	33,20
14, 12 U	50	Α	•			•	•	•	153533R	76,10
14, 12 U	50	Р	•			•	•	•	153170R	33,20
15, 12 U, 5/8"	55	Α	•	•	•	•			153531R	76,10
15, 12 U, %"	55	Р	•	•		•			153175R	33,20
16, 14 U	55	Α	•	•		•		•	153534R	76,10
16, 14 U	55	Р	•	•		•		•	153180R	33,20
17, 15 U	60	Р					•	•	153185R	33,20
18, 14 U, 15 U, 16 U, ¾"	72	Α	•	•	•	•		•	153532R	76,10
18, 14 U, 15 U, 16 U, ¾"	72	Р	•	•		•		•	153190R	33,20
20, 18 U	79	Р	•	•			•	•	153195R	33,20
22, 18 U, %"	86	Α	•	•	•	•			153540R	76,10
22, 18 U, %"	86	Р	•	•					153200R	33,20
25, 26	88	Р						•	153205R	33,20
32	128	Р						•	153210R	62,40

1) Bending radius mm at the neutral axis of the bend (DVGW GW 392)

Cu: St 10217: soft copper tubes, also thin-wall, EN 1057


stainless, nickel steel pipes of the press fitting systems EN 10217-7, EN 10312, series 2, material 1.4401 soft precision steel pipes EN 10305-1, EN 10305-2, St 10305:

EN 10305-3

St 10305-U: soft, coated carbon steel pipes of the pressfitting systems

U:

V: P: multi-layer composite tubes of pressfitting systems Bending former made of glass fibre-reinforced polyamide Bending former made of aluminium

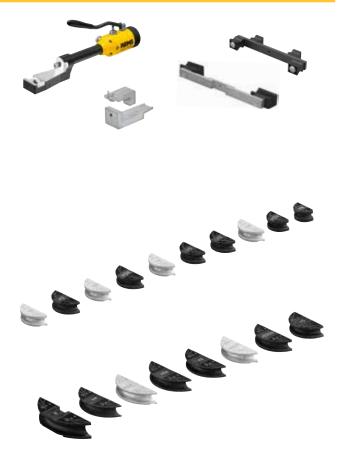

All prices excl. VAT