High quality universal diamond core drilling crowns. Laser welded. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other

Ø 32-200 mm

REMS universal diamond core drilling crowns LS – laser welded. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1% female. Drilling depth 420 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1½ male. Adapter for using REMS Universal diamond core drilling crowns in drive machines having other connecting threads/other tool holders, as accessory.

Suck off dusts that occur during dry drilling with REMS Pull 2 M safety vacuum cleaner, certified for extracting health hazardous dusts of dust class M (page 324).

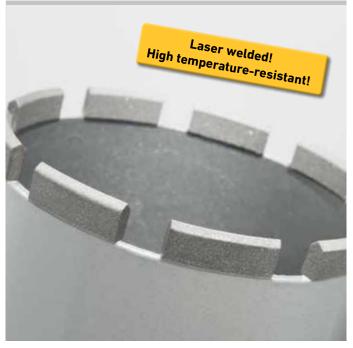







## Supply format

**REMS Universal diamond core drilling crown.** Laser welded! High temperature-resistant! Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1½ female. Drilling depth 420 mm. In a carton.

Number of segments	ArtNo.	Din.
1	181410R	19 400,00
4	181415R	18 130,00
5	181420R	19 280,00
6	181425R	20 940,00
6	181430R	23 750,00
7	181435R	25 790,00
8	181440R	29 110,00
9	181445R	29870,00
9	181450R	31 530,00
10	181455R	35 620,00
10	181459R	37 020,00
10	181460R	38 560,00
11	181465R	45 830,00
12	181470R	48 510,00
13	181475R	58 600,00
14	181480R	61 920,00
	1 4 5 6 6 7 8 9 9 10 10 10 11 12 13	1 181410R 4 181415R 5 181420R 6 181425R 6 181430R 7 181435R 8 181440R 9 181445R 9 181450R 10 181455R 10 181459R 10 181460R 11 181465R 12 181470R 13 181475R






## Accessories

Description	ArtNo.	Din.
Light loosening ring, for light loosening		
of the diamond core crown	180015	2 550,00
Drilling crown extension 200 mm	180155R	7 530,00
Adapter UNC 1¼ male to G ½ male	180052	3 870,00
Adapter UNC 1¼ male to G ½ female	180056	3 520,00
Adapter UNC 1¼ male for Hilti BI, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BI tool holder.	180053	5 940,00
Adapter UNC 1¼ male for Hilti BU, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BU tool holder.	180054	13 670,00
Adapter UNC 1¼ male for Hilti BL, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BL tool holder.	180057R	13 670,00
Sharpening stone for diamond core drilling crowns	079012	7 960,00
Single open ended wrench size 41 for UDKB	079003	4720.00

 $\label{lem:conditional} Additional adapters for using REMS Universal diamond core drilling crowns in drive machines of other makes, on request.$ 

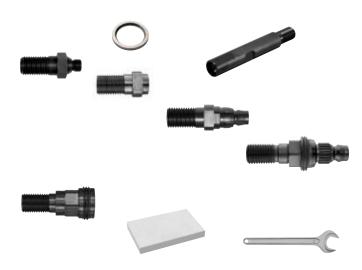

All prices excl. VAT 315