

# Bending formers and back formers

Accessories for REMS Curvo 50, REMS Curvo, REMS Curvo 22V and REMS Sinus

Bending formers and back formers, 180°, form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide or aluminum 90° (Ø 21.3 R 103, Ø 26.9 R 102, Ø 33.7 R 100, Ø 35 R 100, Ø 42 R 140, Ø 42.4 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140). Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers.



Bending former and back former for pipes Ø mm/inch O.D.	R mm	X mm 90°	X mm 45°	Bending former material	REMS Sinus				REMS Curvo				REMS Curvo 22 V				REMS Curvo 50				Art.-No.	€																
					Cu	Cu-U	St 10312	St 10305-U	St 10305	St 10255	St 50086	V	Cu	Cu 12735	Cu-U	St 10312	St 10305-U	St 10305	St 10255	St 50086			V	Cu	Cu 12735	Cu-U	St 10312	St 1127	St 10305-U	St 10305	St 10255	St 50086	V					
10	40	45	20	P	•																														581400	180,61		
12	45	49	22	P	•	•																													581410	135,98		
14, 10 U, ¼" (DN 6)	50	53	23	P	•	•	•																													581420	131,83	
15, 12 U	55	56	25	P	•	•	•																													581430	147,40	
16, 12 U	60	62	28	P	•	•	•																													581440	148,43	
17, 15 U	56	60	27	P	•																															581110	181,65	
18, 14 U, 15 U, ⅜" (DN 10)	70	75	33	P	•	•	•																														581450	149,47
20, 16 U, 18 U	75	80	36	P	•	•	•																													581080	237,70	
21.3, ½" (s = 1.6/2.0/2.6)	103	110	50	S																																581480	536,65	
22, 18 U, ½" (DN 15)	77	81	36	A	•	•																															581460	177,50
22, 18 U, ½" (DN 15)	88	91	41	P																																	581470	260,54
24, 22 U	75	85	38	P																																	581130	288,56
25	98	103	46	P																																	581180	317,63
26	98	108	49	A																																	581270	438,04
26.9, ¾" (s = 1.6/2.0/2.6)	102	108	49	S																																	581490	598,93
28 <sup>1)</sup>	102 <sup>2)</sup>	108	49	P																																	581070	278,18
28, ¾" (DN 20) <sup>2)</sup>	102	110	50	A																																	581260	428,69
28, ¾" (DN 20) <sup>2)</sup>	114	120	54	A																																	581310	371,60
30, 28 U	98	105	47	P																																	581150	349,81
32	98	110	50	P																																	581280	339,43
32	114	121	54	A																																	581320	438,04
1" (DN 25)	100	105	47	S																																	581520	498,24
33.7, 1" (s = 1.6/2.0/2.6)	100	105	47	S																																	581520	498,24
35	100	105	47	S																																	581500	498,24
35	140	150	68	A																																	581350	585,43
40	140	148	67	A																																	581330	589,58
42	140	155	70	S																																	581510	532,49
1¼" (DN 32)	140	150	68	S																																	581530	517,96
42.4, 1¼" (s = 2.0/2.6)	140	150	68	S																																	581530	517,96
50	135	143	64	S																																	581540	699,61
⅜" (9.5 mm)	43	48	22	P	•																																581200	228,36
½" (12.7 mm)	52	60	27	P	•																																581210	217,98
⅝" (15.9 mm)	63	70	32	P	•																																581220	244,97
¾" (19.1 mm)	75	82	37	P	•																																581230	291,68
⅞" (22.2 mm)	98	107	48	P	•																																581240	341,50
1" (25.4 mm)	101	112	50	A																																	581360R	445,30
1" (25.4 mm)	101	112	50	P																																	581370	338,39
1⅛" (28.6 mm)	102	110	44	A																																	581260	428,69
1⅛" (28.6 mm)	115	117	53	A																																	581380	371,60
1¼" (31.8 mm)	114	123	55	A																																	581320	438,04
1¼" (31.8 mm)	133	145	65	A																																	581390	618,65
1⅜" (34.9 mm)	100	105	47	S																																	581500	498,24
1⅜" (34.9 mm)	140	150	68	A																																	581350	585,43
1⅝" (41.3 mm)	140	155	70	S																																	581510	532,49

- R mm Bending radius mm at the neutral axis of the bend (DVGW GW 392)
- X mm Correction dimension for a 90° or 45° bend
- s mm Wall thickness
- <sup>1)</sup> hard, semi-hard copper pipes, also thin-walled, EN 1057
- <sup>2)</sup> hard copper pipes EN 1057
- <sup>3)</sup> According to DVGW work sheet GW 392 for hard and semi-hard copper pipes Ø 28 mm minimum bending radius 114 mm necessary. Wall thickness ≥ 0.9 mm.
- ▲ Adaptor block 10–40, support 10–40 (Art.-No. 582120) necessary.
- Adaptor block 35–50, support 35–50 (Art.-No. 582110) necessary.
- Cu hard, half-hard, soft copper tubes, also thin-wall, EN 1057
- Cu 12735: Copper pipes K65 for refrigeration and air conditioning technology in accordance with EN 12735-1, EN 12449
- St 10312: stainless steel pipes of the press fitting systems EN 10312, series 2, EN 10088, EN 10217-7
- St 1127: stainless steel pipes EN ISO 1127, EN 10217-7
- St 10305-U: coated, soft carbon steel pipes of the press fitting systems EN 10305-3
- St 10305: soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3, carbon steel pipes EN 10305-3
- St 10255: Steel pipes (threaded pipes) EN 10255
- St 50086: Electrical installation pipes DIN EN 50086
- U: coated
- V: multi-layer composite tubes of pressfitting systems
- P: Bending former made of glass fibre-reinforced polyamide
- A: Bending former made of aluminium
- S: Bending former made of spheroidal iron

### Bending to size

If a bend is required at a certain point on the pipe, a length correction must be made to suit the pipe size. The correction dimension X specified in Fig. 1 must be considered for a 90° or 45° bend. The set dimension L must be reduced by the amount X here. If, e.g., the dimension L for pipe size 22 is 400 mm and a bend with a bending radius of 77 mm is to be made, the dimension line should be marked on the pipe at 319 mm. This line is then – as shown in Fig. 1 – to be aligned with the 0-mark on the bending former.

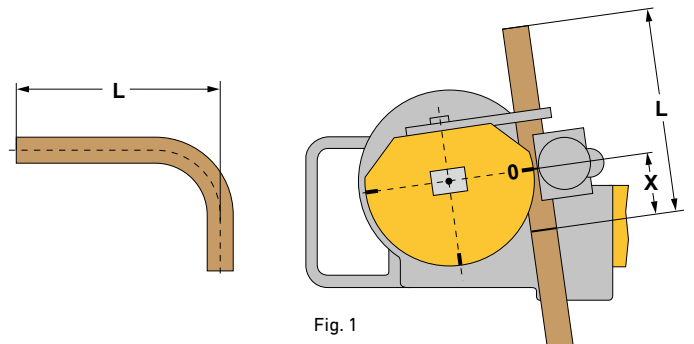


Fig. 1