MACHINES AND TOOLS FOR PIPEWORK

PROMOTION

B/2026 valid until 31st December 2026

REMS for Professionals



NEW

REMS Vario-Collect
Flexible collection systems for liquids.
See page 12

HIGHLIGHT

REMS PressFinder
The innovative online search system for pressing tools.
See page 48



Info

2 YEARS WARRANTY[B]



only 425 g

German quality product

REMS FG4500 C – Compact. Handy. Light. Universally for flue gas analysis and pressure testing with compressed air/inert gas or water.

- For flue gas analysis in accordance with EN 50379 Part 1 and 3.
- Gas processing cartridge made of impact-resistant, shock-proof plastic, firmly integrated into the housing and therefore safe from impact.
- 3.5" colour display with touch function.
- Light, handy exhaust gas probe with thermocouple, probe tube Ø 6 mm, 240 mm long. Probe hose with probe pipe, 1.5 m long, very flexible, for easy handling and large working radius.

CONNECTED REMS mCon

REMS FG4500 C Set

Electronic flue gas analyser and pressure testing device with Connected functionality via Bluetooth or USB. Internal gas sensors O_2, CO and internal pressure sensor ≤ 150 hPa / mbar. Gas processing cartridge. Flue gas probe FG4500 with temperature sensor. 10 filter fleece pads FG4500, 5 filter discs FG4500, pressure hose PX/FG, Ø 5 mm, 1 m long, fastening kit, cable USB-C to USB-A, power supply/charger 100–240 V, 50–60 Hz, 7.5 W, 5 V, 1.5 A. In L-Boxx system case.
Art.-No. 610050 R220G

€ 1,160.00



only 540 g

German quality product



LED for easy determination of the core flow

4 YEARS WARRANTY[D]



REMS FG7500 C – Compact. Handy. Light. Universally for flue gas analysis, pressure and leakage testing as well as usefulness testing of gas installations.

- For flue gas analysis in accordance with EN 50379 Part 1 and 2.
- Quick-change gas processing cartridge FG7500/FG7700 made of impact-resistant, shock-proof plastic, with large viewing window, with innovative plug system for easy cleaning of the condensate tank and fast filter replacement.
- 4.5" colour display with touch function.
- Light, handy exhaust gas probe with thermocouple, draught sensor, probe tube Ø 6 mm, 210 mm long. Green LED for indicating readiness for operation. Yellow LED for easy determination of the core flow. Probe hose with probe lead, 1.4 m long, very flexible, with combi-plug system for quick probe change.
- Simultaneous measurement of draught and nozzle or combustion chamber pressure saves an additional measurement.

CONNECTED REMS mCon

Info

REMS FG7500 C Set

Electronic flue gas analyser and pressure testing device with Connected functionality via Bluetooth or USB. Internal gas sensors O_2, CO (H_2-compensated) and internal pressure sensor ≤ 150 hPa/mbar. Quick-change gas processing cartridge FG7500/FG7700. Flue gas probe FG 7500/7700 with temperature sensor, draught sensor, core flow indicator 10 filter fleece pads FG7500/FG7700, 5 filter discs FG7500/FG7700, pressure hose PX/FG, Ø 5 mm, 1 m long, cable Micro-USB to USB-A, power supply/charger 110–240 V, 50–60 Hz, 7.5 W, 5 V, 1.5 A. In L-Boxx system case.
Art.-No. 610060 R220G € 1,980.00

€ 1,770.00

REMS FG7500 NO C Set

Same as REMS FG7500 C Set, but with additional internal gas sensor NO.
Art.-No. 610065 R220G

€ 2,450.00

REMS mCon – Connected functionality via Bluetooth

CONNECTED REMS mCon



ANDROID APP ON Google play
Available on the App Store

Available free of charge.


The REMS exhaust gas measuring instruments, pressure and leakage testing instruments send data to the REMS mCon App via an existing Bluetooth connection. The following functions, among others, are available on the connected mobile terminating unit (Smart phone, tablet):

- Remote display of the exhaust gas measurement or the time-pressure diagram of a measurement,
- Storage of measurement and test data with customer specification.
- Import customer from contacts of the mobile terminating device or from the cloud or create manually and send to the measuring instrument.
- Create measurement/test logs with your own company logo, individual corporate name and with specification of the tester as a PDF and send with any apps.

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.



REMS Push 25

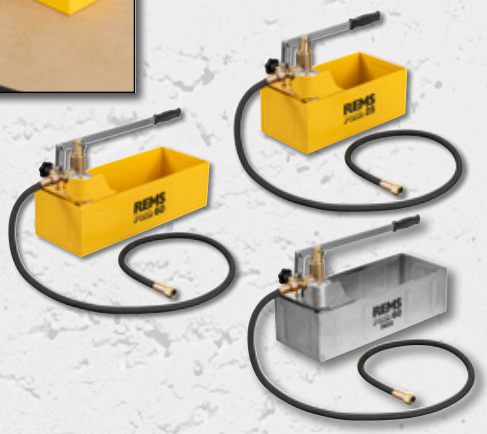

REMS Push – Reliably tight.

Info

REMS Push

Hand pressure testing pump with pressure gauge with drag pointer for pressure and tightness testing of piping systems and receptacles. 1.5 m high-pressure hose with ½" connection. In a carton.

REMS Push 25. Test until 2.5 MPa/25 bar/363 psi. Corrosion-resistant, powder-coated sheet steel tank for 9 l.

REMS Push 60. Test until 6 MPa/60 bar/870 psi. Corrosion-resistant, powder-coated sheet steel tank for 12 l.

REMS Push 60 INOX. Test until 6 MPa/60 bar/870 psi. Stainless steel tank for 12 l.

	Art.-No.	€	Offer €
REMS Push 25	115002 R	273.00	**179.00**
REMS Push 60	115000 R	294.00	**199.00**
REMS Push 60 INOX	115001 R	382.00	**299.00**

REMS Solar-Push – Filling, flushing and venting in one action. Self priming. High displacement. Ideal for solar power systems, ground heat systems and underfloor heating.

Easy cleaning and simple filling thanks to large opening in the plastic container.

Two practical handles for easy carrying of the plastic container.

Info





German quality product









REMS Solar-Push K 60

Transport volume ≤ 36 l/min, tank volume 30 l. With centrifugal pump, temperature-resistant for continuous load ≤ 60°C. Transport pressure ≤ 0.55 MPa/5.5 bar/80 psi. Condenser motor 230 V / 110 V, 50 Hz, 940 W. 2 pieces flexible, transparent PVC fabric hoses ½" T60, each 3 m long, temperature-resistant ≤ 60°C. On sturdy tubular steel frame with air-filled wheels. In a carton.
Art.-No. 115312 R110G € 993.00

€ 785.00

REMS Solar-Push I 80

Electric filling and flushing unit for easy and fast filling, flushing and venting of closed systems. Pumping capacity ≤ 27 litres/min, tank volume 30 litres. With impeller pump, temperature resistant during constant use ≤ 80°C. Pumping pressure ≤ 0.65 MPa/6.5 bar/94 psi. Capacitor motor 230 V, 50 Hz, 1000 W. Pressure release valve. 2 flexible EPDM-fabric hoses ½" T100, 3 m long, high temperature resistant ≤ 100°C. On sturdy tubular steel frame with air-filled wheels. In a carton.
Art.-No. 115311 R220G € 1,220.00

€ 875.00



Fine filter with fine filter bag 70 µm

consisting of screw cap with return connection for return line with ¾" union, adapter, 1 fine filter bag 70 µm, for flushing underfloor heating/wall radiators and clearing sludge
Art.-No. 115220

€ 113.00

Fine filter with fine filter cartridge 90 µm

washable, with large dirt collection vessel, for return line with ¾" union, for flushing underfloor heating/wall radiators and clearing sludge
Art.-No. 115323 R

€ 235.00

Changeover valve flow direction

complete with EPDM fabric hose ½" T100, for flushing underfloor heating/wall radiators and effective clearance of sludge by pressure surges when flow direction changes
Art.-No. 115326 R

€ 311.00


[B] [D] Warranty conditions and registration for extension of the manufacturer's warranty to 2 or 4 years under www.rems.de/service.

REMS Multi-Push S / SL / SLW Connected – Only one device with 8 filling/flushing programs and up to 12 automatically running pressure testing programs.

Electronic flushing unit or flushing and pressure testing units with Connected functionality via Wi-Fi radio standard. With oil-free compressor. Permanent process monitoring. Logging of flushing and test data. Creation of logs with text and pictures.




Desilting and flushing of heating systems[2)]



Flushing of drinking water installations with water or with a water/air mixture[1)3)4)]



disinfection of drinking water installation[1)4)5)]
Cleaning and preservation of heating systems



Pressure testing with compressed air (SL / SLW)[4)7)]
Pressure testing with water (SLW)[1)6)]



EN 806-4[1)]
prEN 14336[2)]
ZVSHK[4)6)]
DVGW[3)5)7)]

- Measuring and control devices for automatically running the flushing and test programs and for documenting the results.
- Input and control unit with 4.3" colour display with touch function and modern TFT LCD technology, 110 mm screen diagonal, 480 × 272 pixels.
- Pictograms for simple selection of the filling/flushing and pressure testing programs.
- User-friendly menu guidance takes you step by step through the flushing and testing process.

Patent EP 2 816 231
Patent EP 2 954 960

Connected functionality via Wi-Fi radio standard.

REMS Multi-Push S/SL/SLW Connected offers various additional functionalities through the REMS Service Portal such as, for example:

- logging of flushing and test data,
- uploading and storing notes and images for flushing and testing processes,
- creation of logs with your own company logo,
- configuration of the product (date format, time format, time zone, pressure unit, temperature unit, length unit),
- set-up of usage bars (immediate bar or feedback interval as anti-theft, time and date ranges for barring times).

Wi-Fi connection to the Cloud

- REMS Multi-Push Connected sends collected data (flushing and test data, error messages, configuration of the product, etc.) to the Cloud after registration and with an existing Internet connection. The data are processed and stored there.
- The user can access these data through the REMS Service Portal. Changes to the configuration and usage bars are sent back to the flushing and pressure testing unit with an existing Internet connection.

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.



Info

German quality product

REMS Multi-Push S Connected Set

Electronic flushing unit with oil-free compressor and Connected functionality via Wi-Fi radio standard. Input and control unit with 4.3" colour display with touch function. Piston compressor with crank drive, capacitor motor 230 V, 50 Hz, 1,500 W, person circuit breaker (PRCD). Mobile tubular steel frame. Fastenings for water input and output of the REMS Multi-Push S Connected. Two Ø 1" suction/pressure hoses, with fabric inlay, 1.5 m long, with 1" hose screw fittings, with caps. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and 1" hose screw fitting, 1" double nipple, for blowing out water remains from REMS Multi-Push S Connected and suction/pressure hoses at the end of work. Without disinfection unit, without cleaning and preservation unit. In a carton.
Art.-No. 115813 R220G € 2,950.00

€ 2,249.00



Info

German quality product

REMS Multi-Push SL Connected Set.

Electronic flushing and pressure testing unit with oil-free compressor and Connected functionality via Wi-Fi radio standard. Input and control unit with 4.3" colour display with touch function. Piston compressor with crank drive, capacitor motor 230 V, 50 Hz, 1,500 W, person circuit breaker (PRCD). Mobile tubular steel frame. Fastenings for water inputs and outputs of the REMS Multi-Push Connected. Two Ø 1" suction/pressure hoses, with fabric inlay, 1.5 m long, with 1" hose screw fittings, with caps. One Ø 8 mm compressed air hose, 1.5 m long, with quick coupling DN 5 and G ½" hose screw fitting, for pressure testing with compressed air. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and 1" hose screw fitting, 1" double nipple, for blowing out water remains from REMS Multi-Push Connected and suction/pressure hoses at the end of work. Without disinfection unit, without cleaning and preservation unit. In a carton.
Art.-No. 115811 R220G € 3,590.00

€ 2,965.00



Info

German quality product

REMS Multi-Push SLW Connected Set

Same as REMS Multi-Push SL Connected Set, Art.-No. 115811, additionally with hydro-pneumatic water pump for hydrostatic pressure testing with water. One high-pressure hose Ø ½", 1.5 m long, with ½" hose screw fittings, with caps. In a carton.
Art.-No. 115812 R220G € 4,570.00

€ 3,509.00

[1] EN 806-4:2010 – Technical Rules for Drinking Water Installations – Part 4: Installation
[2] prEN 14336:2021 – Draft – Heating and Cooling Systems in Buildings – Installation and Commissioning of Water-based Heating Systems – Easy Flushing
[3] Worksheet DVGW W 557 (A) October 2012 of the German Gas and Water Association (DVGW)
[4] Information leaflet "Flushing, Disinfection and Commissioning of Drinking Water Installations" (August 2014) of the Central Association for Sanitary, Heating, Air Conditioning (ZVSHK), Germany
[5] Technical Rule DVGW W 551-3 (A) (August 2022), Hygiene in the Drinking Water Installation – Part 3: Cleaning and Disinfection of the German Gas and Water Association (DVGW)
[6] Information leaflet "Leak Testing of Drinking Water Installations with Compressed Air, Inert Gas or Water" (January 2011) of the Central Association for Sanitary, Heating, Air Conditioning (ZVSHK), Germany
[7] Technical Rule "DVGW-TRGI 2018, Technical Rule for Gas Installations – DVGW Worksheet G 600" of the German Gas and Water Association (DVGW)

Coloured active ingredients for feeding and washing control!





Starter-Set TW-H for disinfection, cleaning and preservation

The active ingredients for disinfection, cleaning and preservation have different colours. The colouring enables you to monitor whether the active ingredients are added completely or washed out again.

Starter-Set TW

For disinfection of drinking water installations.
1 REMS V-Jet TW, 2 REMS Peroxi Color
Art.-No. 115852 R € 499.80

€ 339.00

Starter-Set H

For cleaning and preserving radiator and surface heating systems.
1 REMS V-Jet H, 2 REMS CleanH, 2 REMS NoCor
Art.-No. 115853 R € 577.40

€ 369.00



NEW

REMS ThermoCam – Making heat easily visible. Precise. Non-contact. In real time.

Infra-red optics with high-resolution detector. Connectable optical camera for fusion image, image-in-image, superposed image, visual image. Numerous temperature analysis tools, individually adjustable. 8x digital zoom. Alignment laser. LED lamp.

- Non-contact visualization of heat radiation from bodies and transformation into a thermal image.
- For the determination of surface temperatures and detection of temperature differences on installations.
- Temperature range -20 – 550 °C, NETD < 40 mK, Instantaneous Field of View (IFOV) 3,3 mrad.
- Documentation of pictures and videos with voice recording on MicroSD card.

Super IR | LED | ×8 | micro SD | USB-C | IP54

Info

REMS ThermoCam 28 C Set

Electronic thermal imaging camera with Connected functionality via USB. IR resolution 192 x 144 pixels, Super-IR 384 × 288 pixels, number of measuring points 27,648, field of view (FOV) 37,2 × 27.8°. 3.5" TFT-LCD colour display with touch function 8x digital zoom. Alignment laser. LED lamp. Li-Ion 3.7 V, 5 Ah battery, cable USB-C to USB-C/A, 16 GB MicroSD card. In sturdy case.
Art.-No. 176030 R4 € 1,290.00

€ 990.00

Info

REMS ThermoCam 49 C Set

Electronic thermal imaging camera with Connected functionality via USB. IR resolution 256 x 192 pixels, Super-IR 512 × 384 pixels, number of measuring points 49,152, field of view (FOV) 50 × 37.2°. 3.5" TFT-LCD colour display with touch function 8x digital zoom. Alignment laser. LED lamp. Li-Ion 3.7 V, 5 Ah battery, cable USB-C to USB-C/A, 16 GB MicroSD card. In sturdy case.
Art.-No. 176031 R4 € 1,950.00

€ 1,490.00



Info

2 YEARS WARRANTY[B]



only 56 g

German quality product

REMS Detect GS3 – The economical solution for detection of inflammable gases. Ultra small. Ultra light. Ultra compact.

- Ultra small, ultra compact, electronic leakage detector for reliable detection of inflammable gases, e.g. butane (C_4H_{10}), methane (CH_4), propane (C_3H_8), hydrogen H_2.
- Only 170 mm long, weighs just 56 g. Universally usable even in places with difficult access.
- With optical and acoustic signalling of changes in the gas concentration.

LED

REMS Detect GS3

Leak detector for reliable detection of flammable gases, 2 batteries 1.5 V, AAA, LR3. In belt bag.
Art.-No. 611003 R € 212.00

€ 195.00

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

PLUS X AWARD
2025 | Achieved for:
Innovation
High Quality
Ease of Use
Functionality
www.plusxaward.com

Info

only 78 g

German quality product



REMS Detect GS4 – Reliable detection of gas and refrigerant leakages. Ultra small. Ultra light. Ultra compact. 4 quick-change gas sensors with colour coding.

- Ultra small, ultra compact, electronic leakage detector with quick-change gas sensors for reliable detection of different gases and refrigerants, e.g. Inflammable gases butane (C_4H_{10}), methane (CH_4), propane (C_3H_8), hydrogen (H_2), ammonia (NH_3) and refrigerant R-22, R-32, R-134a, R-152a, R-290, R-404a, R-407c, R-410a, R-507a, R-600a, R-1234yf.
- Leakage detector with quick-change gas sensor only 214 mm long, weighs just 78 g. Universally usable even in places with difficult access.
- Flexible extension 200 mm, can be fitted without tools.
- With optical and acoustic signal when the gas concentration changes.

LED

REMS Detect GS4 Set

Electronic leakage detector with quick-change gas sensor, flexible extension 200 mm, 2 batteries 1.5 V, AAA, LR3. In a strong soft bag.


Version	Art.-No.	€	Offer €
REMS Detect GS4 Set F With quick-change gas sensor GS4-F for inflammable gases	611095 R	339.00	**275.00**
REMS Detect GS4 Set R With quick-change gas sensor GS4-R for refrigerants	611096 R	339.00	**275.00**

Accessories

Description	Art.-No.	€
Quick-change gas sensor GS4-F, for inflammable gases, e.g. butane (C_4H_{10}), methane (CH_4), propane (C_3H_8), hydrogen (H_2)	611310 R	101.90
Quick-change gas sensor GS4-R, for refrigerants, e.g. R-22, R-32, R-134a, R-152a, R-290, R-404a, R-407c, R-410a, R-507a, R-600a, R-1234yf, meets the specifications of the F-Gas directive and EN 14624:2020	611312 R	101.90
Quick-change gas sensor GS4-S, for ammonia (NH_3)	611311 R	101.90
Quick-change gas sensor GS4-H, specially for hydrogen (H_2), no cross-sensitivity with other inflammable gases	611313 R	109.00
Quick-change attachment GS4-LED, LED lamp for universal use, also especially for illuminating places with difficult access	611314 R	54.10

Info

CONNECTED
REMS mCon

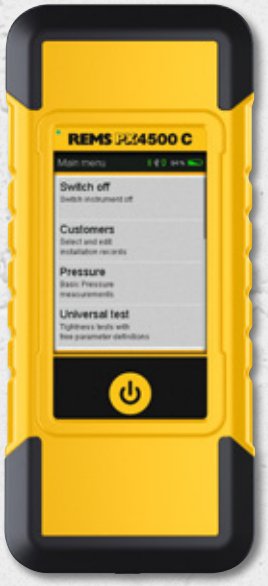



only 345 g

German quality product

REMS PX4500 C – Compact, handy, light. Universal for pressure and leakage tests.

REMS PX4500 C Set 3,5 bar

Electronic pressure and leakage testing device with Connected functionality via Bluetooth or USB. Pressure and leakage testing with compressed air/inert gas p ≤ 0.4 MPa/4 bar or with water p ≤ 2.5 MPa/25 bar. Pressure hose PX/FG, Ø 5 mm, transparent, 1 m long with bayonet connection (plug), with silicone tubing. Air pump connection piece with Schrader valve, ≤ 150 hPa/mbar, with plug for pressure hose, with quick coupling DN 5 (plug), with Schrader valve. Electronic pressure sensor ≤ 0.35 MPa/3.5 bar with quick coupling DN 5 (plug), with Schrader valve, 1.5 m long connecting lead, with jack plug. Adapter quick coupling DN 5 to R ½" AG. Single pipe meter cap G 2" IG (for DN 25) with quick coupling DN 5 (socket), with seal. Manual compressed air pump ≤ 0.4 MPa/4 bar, fastening kit, cable USB-C to USB-A, power supply/charger 100–240 V, 50–60 Hz, 7.5 W, 5 V, 1.5 A. In system case L-Boxx.
Art.-No. 611075 R220G

€ 1,160.00

REMS PX4500 C Set 25 bar

same as REMS PX4500 C Set 3.5 bar, but, instead of electronic pressure sensor ≤ 0.35 MPa/3.5 bar with electronic pressure sensor ≤ 2.5 MPa/25 bar and air pump connection piece with Schrader valve ≤ 0.4 MPa/4 bar.
Art.-No. 611080 R220G

€ 1,380.00

[B] Warranty conditions and registration for extension of the manufacturer's warranty to 2 years under www.rems.de/service.



Info

CONNECTED mCon

only 1,1 kg

German quality product

REMS P7-TD C – For common tests in gas and water installation. Ultra stable plastic housing with soft grip. Efficient usefulness testing by comparative leakage method.

- Pressure and leakage testing with compressed air/inert gas p ≤ 0.4 MPa/4 bar or with water p ≤ 2.5 MPa/25 bar.
- Efficient and simple usefulness testing by comparative leakage method, without dismantling the gas meter, without volume determination and without pressure increase.
- 3.5" colour display with touch function.

REMS P7-TD C Set

Electronic pressure and leakage testing device with Connected functionality via Bluetooth or USB. With internal compressed air pump ≤ 150 hPa/mbar, internal electronic pressure sensor ≤ 0.1 MPa/1.0 bar. With equipment ≤ 0.1 MPa/1.0 bar. 2 pressure hoses P7, Ø 5 mm, transparent, 1 m long, with plug coupling DN 3 (socket) and silicone tubing, compressed air hose P7, ≤ 150 hPa/mbar, Ø 6 mm, transparent, 2 m long, with plug coupling DN 3 (socket) and quick coupling DN 5 (plug), compressed air hose P7, Ø 6 mm, 2 m long, with quick coupling DN 5 (plug, socket), air pump connection piece with Schrader valve, ≤ 0.4 MPa/4 bar, adapter quick coupling DN 5 to R ½" AG, manual compressed air pump ≤ 0.4 MPa/4 bar. Power supply/charger 100 – 240 V, 50 – 60 Hz, 12 W. Cable Mini-USB to USB-A. In system case L-Boxx.
Art.-No. 611060 R220G

€ 2,210.00



Info

only 1,1 kg

German quality product

REMS P7-TDX C – For all common tests in gas, liquid gas and water installation. Ultra stable plastic housing with soft grip. Efficient usefulness testing by comparative leakage method.

- Pressure and leakage testing with compressed air/inert gas p ≤ 0.4 MPa/4 bar or with water p ≤ 2.5 MPa/25 bar.
- Efficient and simple usefulness testing by comparative leakage method, without dismantling the gas meter, without volume determination and without pressure increase.
- Also leakage volume measurement on systems > 300 l and quick tests for non-statutory measurement.
- Magnetic housing rear for easy attachment, e.g. to boilers or other ferromagnetic materials.
- 3.5" colour display with touch function.

CONNECTED mCon

REMS P7-TDX C Set 3,5 bar

Electronic pressure and leakage testing device with Connected functionality via Bluetooth or USB. With internal compressed air pump ≤ 150 hPa/mbar, internal electronic pressure sensor ≤ 0.35 MPa/3.5 bar, 2 pressure hoses P7, Ø 5 mm, transparent, 1 m long, with plug coupling DN 3 (socket) and silicone tubing, compressed air hose P7, ≤ 150 hPa/mbar, Ø 6 mm, transparent, 2 m long, with plug coupling DN 3 (socket) and quick coupling DN 5 (plug), compressed air hose P7, Ø 6 mm, 2 m long, with quick coupling DN 5 (plug, socket), air pump connection piece with Schrader valve, ≤ 0.4 MPa/4 bar, adapter quick coupling DN 5 to R ½" AG, manual compressed air pump ≤ 0.4 MPa/4 bar. Power supply/charger 100 – 240 V, 50 – 60 Hz, 12 W. Cable Mini-USB to USB-A. In system case L-Boxx.
Art.-No. 611065 R220G

€ 2,430.00

REMS P7-TDX C Set 25 bar

same as REMS P7-TDX C Set 3.5 bar, but additionally with electronic pressure sensor ≤ 2.5 MPa/25 bar.
Art.-No. 611070 R220G € 2,740.00

€ 2,210.00



REMS Pull-Push – Fast removal of blockages.

- High downforce thanks to front adjustable grip handle.
- 2 adaptor sleeves for optimum adaptation to the problem area: Short sleeve for sinks, basins and baths, long sleeve for toilets.

Info

REMS Pull-Push

Manual suction / pressure pump for fast removal of blockages. With short and long sleeves. In a carton.
Art.-No. 170300 R € 144.00

€ 99.90



Up to 60 bar 1,300 W.
Self priming.

REMS E-Push 2 – Electrical filling and testing.

Info

- High-pressure hose with fabric inlay prevents falsification of the measuring result.
- High-pressure reciprocating pump
- High displacement of 6.5 l/min
- Adjustable pressure limiting
- Suction hose with suction filter

REMS E-Push 2

Electric pressure testing pump with pressure gauge for pressure and leak testing of pipe systems and tanks up to 6 MPa/60 bar/870 psi, with adjustable pressure limiting. Pump unit with condenser motor 110 V / 230 V, 50 Hz, 1,300 W. 1.5 m suction hose with ½" connection. 1.5 m high-pressure hose with ½" connection. Return trap. In a carton.
Art.-No. 115500 R110G € 1,006.00

€ 819.00



Info

REMS Calc-Push – effective electric decalcifying.

High displacement. 3-way lever for reversal of flow direction, with zero setting.

Useful container volume: 21 l
Displacement: ≤ 30 l/min
Displacement pressure: ≤ 0.1 MPa/1.0 bar/15 psi
Transport height: ≤ 10 m
Temperature of decalcifying solution: ≤ 50°C

REMS Calc-Push

Electric decalcifying pump for effective decalcifying of pipes and containers, e.g. flow heaters, boilers, hot water tanks, cold water tanks, heat exchangers, heating and cooling systems. Displacement ≤ 30 l/min, useful container volume 21 l. Pump unit with condenser motor 230 V, 50 Hz, 165 W. Displacement pressure ≤ 0.1 MPa/1.0 bar/15 psi. Transport height ≤ 10 m. Flexible ½", 2.3 m long flexible PVC fabric hoses, with hose screw fittings with Rp ½" female thread and caps. 2 double nipples ⅜" – ½", 2 double nipples ½" – ¾". In a carton.
Art.-No. 115900 R220G € 884.00

€ 735.00



Info



German quality product

REMS Mini-Cobra – Proven, handy device for the fast unblocking of pipes, e.g. for kitchens, bathrooms and toilets.

REMS Mini-Cobra

Pipe cleaning device for pipes Ø 20–50 (75) mm, with crank handle and hexagonal driver for conventional drive machine (electric, slow drilling machine with continuous drive or power drill/screwdriver). For pipe cleaning spirals Ø 6, 8 and 10 mm. Spiral drum made of impact-resistant, glass fibre-reinforced plastic. Quick-clamping chuck. Coil Ø 8 mm, 7,5 m long. In a carton.
Art.-No. 170010 R € 196.00

€ 139.00





Info

Patent EP 3 059 022

REMS Mini-Cobra S – Split-second reversal of direction of spiral feed/return by fast switchover.





0–950 rpm
600 W, only 5.2 kg
German quality product

L-BOXX H

REMS Mini-Cobra S Set

Electric pipe cleaning device with fast switchover, for pipes Ø 20–50 (75) mm. For drain cleaning cables Ø 8 and 10 mm. Drive unit with maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 630 W, high-torque forward and reverse at low speed. Safety tip switch. Stepless, electronic speed control (acceleration switch) between 0 and 950 rpm. Cable drum in shock-proof, glass-fibre reinforced plastic. Cable Ø 8 mm, with core, 7.5 m long. In L-Boxx system case H.
Art.-No. 170028 R220G € 736.00

€ 535.00





Info

REMS Mini-Cobra S 22 V VE – Split-second reversal of direction of spiral feed/return by fast switchover.





Patent EP 3 059 022

0–560 min^{-1}
500 W, only 5,2 kg
German quality product

L-BOXX H

REMS 22 V LI-ION TECHNOLOGY 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Mini-Cobra S 22 V VE

Cordless pipe cleaning device with fast switchover, for pipes Ø 20–50 (75) mm. For drain cleaning cables Ø 8 and 10 mm. Drive unit with powerful, brushless battery motor 22 V, 500 W, maintenance-free, robust gear, extra torque powerful left and right hand rotation at low speeds, safety switch. Continuous, electronic speed control (accelerator switch (VE)) from 0 to 560 rpm. Cable drum in shock-proof, glass-fibre reinforced plastic.

Drive unit 22 V, Cable Ø 8 mm, with core, 7.5 m long. In L-Boxx system case H.

	Art.-No.	€	Offer €
Set\P Without battery, without rapid charger.	170029 R22	652.00	**555.00**
Set Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, Rapid charger C 12/22 V, 100–240 V, 50–60 Hz, 100 W	170027 R220G	966.00	**769.00**

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS Cobra – Pipe free – quick and easy.

Fast rotater with spiral sections for working lengths up to 70 m. Effective chain spinning and cutting up to 740 rpm.

Closed drive spindle protects motor and drive against dirt and water.







German quality product



Info 22

Info 32

Description	Art.-No.	€	Offer €
REMS Cobra 22 Set 16+22 In a carton.	172012 R220G	2,470.00	**1,859.00**
REMS Cobra 32 Set 22+32 In a carton.	174011 R220G	4,930.00	**3,619.00**

Rugged quality tools for tough use and long service life.

Rugged design in chrome-vanadium steel, all steel, drop forged, tempered, powder-coated. Hardened, highly wear resistant toothing.

Info

Info



REMS Catch S 1" + S 1½" + W 240

Swedish pattern wrench 'S'. DIN 5234 – Form C. Water pump pliers, 7 grip positions. DIN ISO 8976.
Art.-No. 116X01 R € 169.90

€ 109.00

REMS Catch S 1" + S 1½" + S 2"

Swedish pattern wrench 'S'. DIN 5234 – Form C.
Art.-No. 116X02 R € 244.70

€ 142.00

REMS WRK 50 – Robust tool trolley case with lots of storage space.

Info

Well-organized interior. 3-stage telescopic pull-out. Smooth-running wheels.

NEW





REMS WRK 50

Tool trolley for organized storage and easy, convenient transport of tools. 3-stage telescopic pull-out, 2 wheels, size approx. 530×450×300 mm. Max. load 50 kg.
Art.-No. 190305 R € 179.00

€ 149.00

REMS WRS 20 – Robust tool rucksack with lots of storage space.

Info

Well-organized interior. Waterproof stand-up bottom. Very comfortable to carry.





REMS WRS 20

Tool rucksack for tidily organized storage and convenient transport of tools. Dimensions approx. 480×370×210 mm. Max. load 20 kg.
Art.-No. 190304 R € 96.80

€ 63.70

REMS WT 24 – Robust tool bag with lots of storage space.

Info

Well-organized interior. Waterproof stand-up bottom.



REMS WT 24

Tool bag for tidily organized storage and convenient transport of tools. Dimensions approx. 500×355×240 mm. Max. load 24 kg.
Art.-No. 190302 R € 125.00

€ 82.20





Info



Chuck range 1,5 – 13 mm

0 – 560 min^{-1}
500 W, only 1,6 kg

REMS Helix 22 V VE – Drilling, screw driving and deburring. With powerful, brushless battery motor.



REMS 22 V LI-ION TECHNOLOGY
2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Helix 22 V VE

Cordless power drill/screwdriver with Vario-Electronics (VE) for drilling in steel, stone, ≤ Ø 13 mm, wood ≤ Ø 32 mm and other materials and for driving in/loosening screws ≤ Ø 8 mm. Drive machine with keyless quick chuck, clamping range 1.5 – 13 mm, right and left hand rotation. Electromechanical drive with powerful, brushless battery motor 22 V, 500 W, 2-step robust gear. 2 continuously adjustable speed ranges from 0 to 560 rpm and 0 to 1,900 rpm, 15 torque stages plus drilling stage, hard torque of 50 Nm in both speed ranges. Safety switch. Integrated LED work light. Belt clip.

Drive unit 22 V, 1 bit with double blade slot/cross-head, 50 mm long. In carrying bag.

	Art.-No.	€	Offer €
Set\P Without battery, without rapid charger.	190100 R22	256.00	**232.00**
Set Battery Li-Ion 22 V, 2,5 Ah, 54 Wh, Rapid charger C 12/22 V, 100 – 240 V, 50 – 60 Hz, 100 W	190110 R220G	532.00	**479.00**





NEW



Info

REMS Vario-Collect 8 – Safe collection of liquids.

- Flexible collection tray made of fabric-reinforced PVC for a filling capacity of 8 l, wall thickness 0.9 mm, with flexible rubber sealing lip and integrated, flexible metal band for tight connection to objects and adaptation of the tray shape to local conditions.
- Flexible drain pipe made of fibre-reinforced PVC, 500 mm long, with integrated, flexible metal band and two powerful neodymium magnets.
- Flexible rose fitting, 250 mm long, opening Dm 20 mm, with Velcro fastener, for positioning around a pipe.
- For a dry and clean working environment.

REMS Vario-Collect 8 Set

Flexible collection system made of fabric-reinforced PVC with integrated, flexible metal band for liquids, e.g. water, oil, liquids containing glycol. Collection tray for a filling capacity of 8 l, with flexible rubber sealing lip, 4 eyelets. Drain pipe, 500 mm long, 2 neodymium magnets, 2 eyelets. Rose fitting, 250 mm long, opening Dm 20 mm, with Velcro fastener. Water-resistant transport bag. In a carton.
Art.-No. 132341 R € 159.00

€ 119.00





NEW



Info

REMS Vario-Collect 20 – Safe collection of liquids.

- Flexible, round collection vessel made of fabric-reinforced PVC for a filling capacity of 20 l, wall thickness 0.9 mm, with integrated, flexible metal band for adaptation of the vessel shape to local conditions, adaptable vessel height.
- Two length-adjustable, wide carrying straps, each with two snap hooks mounted on rotatable bearings for easy transport and for hanging the collection vessel in any position.
- For a dry and clean working environment.

REMS Vario-Collect 20 Set

Flexible collection system made of fabric-reinforced PVC with integrated, flexible metal band for liquids, e.g. water, oil, liquids containing glycol. Collection vessel for a filling capacity of 20 l, drain nozzle G ¾", tap connector, silicone hose Ø 16 mm, 3,3 m long, with quick coupling, fastening clip, 4 carrying rings, 2 carrying straps with 2 snap hooks each, extra snap hooks. In a carton.
Art.-No. 132342 R € 169.00

€ 129.00

 € excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.





Info



REMS KaliGrat E – Robust, quality tool for calibration and outer/inner deburring of pipes. For manual operation or electric drive.

Simultaneous calibration and outer/inner deburring. Ratchet handle with changeable calibrating and deburring heads, with quick-change holder.

REMS KaliGrat E Set

Calibrating tool and outer/inner deburrer, for manual operation or electric drive. For composite tubes Ø 14–63 mm. Ratchet handle with quick-change holder with spring locking, calibrating and deburring heads. In sturdy case.

Version Ø mm × wall thickness mm	Art.-No.	€	Offer €
Set 16×2+20×2+25×2,5/26×3	114000 R	364.00	289.00
Set 16×2,25+20×2,5+25×2,5/26×3	114002 R	364.00	279.00
Set Allround 26 14×2+16×2+16×2,25+18×2+20×2+20×2,25+20×2,5+25×2,5/26×3	114001 R	678.40	539.00



REMS KaliGrat R – Robust, quality tools for calibration and inner deburring of pipes, free hand.

Simultaneous calibration and inner deburring. Ratchet handle with graduated calibrating pin with integrated deburring blades.

Info

REMS KaliGrat R

Calibrating tool and inner pipe deburrer. For composite tubes Ø 16–63 mm. Ratchet handle with calibrating pin for different different diameters and wall thicknesses, with integrated deburring blades. In blister pack.

Version Ø mm × wall thickness mm	Art.-No.	€	Offer €
R4 16×2+20×2+25×2,5/26×3+32×3	114045 R	105.00	74.90
R4 16×2+20×2,25+25×2,5/26×3+32×3	114046 R	105.00	74.90
R3 40×3,5 + 50×4 + 63×4,5	114047 R	209.00	164.00
R3 40×4 + 50×4,5 + 63×6	114048 R	209.00	164.00

REMS KaliGrat H – Robust, quality tools for calibration and outer/inner deburring of pipes.

Simultaneous calibration and outer/inner deburring.
Start handle with calibrating pins and deburring blades.

Info

REMS KaliGrat H

Calibrating tool and outer/inner pipe deburrer. For composite tubes Ø 16–26 mm.
In blister pack.

Version Ø mm × wall thickness mm	Art.-No.	€	Offer €
16×2+20×2+26×3	114060 R	124.00	89.90
16×2+20×2+25×2,5	114061 R	124.00	89.90
16×2,25+20×2,5+26×3	114062 R	124.00	89.90





Info

REMS Lumen – Electric lighting. With high light intensity. Handy, light. Continuous swivel.

REMS Lumen 5000
Electric LED flood light with high light intensity. 230 V, 50–60 Hz.
Light flux ≤ lm 5,000, Power ≤ W 50. 5 m connecting lead. In a carton.
Art.-No. 175220 R220G € 87.40

€ 62.90

REMS Lumen 7000
Electric LED flood light with high light intensity. 230 V, 50–60 Hz.
Light flux ≤ lm 7,000, Power ≤ W 70. 5 m connecting lead. In a carton.
Art.-No. 175221 R220G € 106.00

€ 76.90

REMS Lumen 10000
Electric LED flood light with high light intensity. 230 V, 50–60 Hz.
Light flux brightness stage 1 ≤ lm 5,000, Power ≤ W 50.
Light flux brightness stage 2 ≤ lm 10,000, Power ≤ W 100.
5 m connecting lead. In a carton.
Art.-No. 175222 R220G € 132.00

€ 104.70

REMS 3B telescopic stand
on a tripod, height-adjustable, collapsible
Art.-No. 175230 R

€ 33.20

*** Energy label and product data sheet at www.rems.de

Description	Operating hours h		
	Stage 1	Stage 2	Stage 3
Battery Li-Ion 22 V, 2.5 Ah, 54 Wh	5.4	2.4	1.6
Battery Li-Ion 22 V, 5.0 Ah, 108 Wh	10.9	4.8	3.2
Battery Li-Ion 22 V, 9.0 Ah, 194 Wh	19.6	8.6	5.7

Info



REMS Lumen 2800 22 V – Lights everywhere. With high light intensity. Mobile, handy, light. For battery and corded operation. Continuous swivel.

REMS 22V LI-ION TECHNOLOGY
2.5 Ah | 5.0 Ah | 9.0 Ah

REMS Lumen 2800 22 V Set Power-Edition.
Cordless LED flood light with high light intensity. For battery and corded operation. Light flux ≤ 2,800 lm. Voltage supply 220–240 V, 50–60 Hz, 138 W, 24 V, 1,5 A. Without battery, without rapid charger. In a carton.
Art.-No. 175210 R220G € 154.00

€ 122.50

REMS Lumen 2800 22 V Set
Cordless LED flood light with high light intensity. For battery and corded operation. Light flux ≤ 2,800 lm. Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, rapid charger C 12/22 V, 100–240 V, 50–60 Hz, 100 W. Voltage supply 220–240 V, 50–60 Hz, 138 W, 24 V, 1,5 A. In a carton.
Art.-No. 175211 R220G € 429.00

€ 345.00

REMS 3B telescopic stand
on a tripod, height-adjustable, collapsible
Art.-No. 175230 R

€ 33.20

*** Energy label and product data sheet at www.rems.de



REMS CamScope HD

Brilliant pictures and videos of cavities, shafts and pipes in HD quality.

Info

REMS CamScope HD Set
Mobile, handy endoscope camera for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Documentation of pictures and videos in HD quality on MicroSD card. Endoscope camera with 5" TFT-LCD colour display, 4x digital zoom, MicroSD card slot, USB port, integrated 3.7 V, 4.0 Ah Li-ion battery. Camera cable set Color 8-1 HD 180°/90°, 180° straight colour camera and 90° angled colour camera, with 1 m formable push cable and add-on hook, add-on magnet. 32 GB MicroSD card. USB cable. In sturdy case.
Art.-No. 175400 R4 € 253.00


€ 205.00



REMS CamSys 2 – Mobile, handy camera inspection system for low-cost inspection and damage analysis. Voice recording. Self-levelling camera. Transmitter for localising camera heads.

Info





REMS CamSys 2 Set S-Color – with voice recording.

Electronic camera inspection system for low-cost inspection and damage analysis. Documentation of pictures and videos with voice recording on SD card with specification of date and time. Controller unit in microprocessor technology with 7" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery 3.7 V, 7.6 Ah, in sturdy, impact-proof plastic housing, spray protected, glare protection, stand. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 15 W, SD card 4 GB, USB cable, video cable, in sturdy case. Camera cable set S-Color with high resolution special colour camera with CMOS image sensor and push cable.

REMS CamSys 2 Set S-Color 10 K

High resolution special colour camera Ø 25 mm, 10 m push cable Ø 4.5 mm with length mark, very flexible, in the cable reel. For small pipe diameters and narrow pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.
Art.-No. 175301 R220G € 3,220.00

+ 1 2 3

€ 2,605.00

REMS CamSys 2 Set S-Color 20 H

High resolution special colour camera Ø 25 mm, 20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metering. For small pipe diameters and narrow pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.
Art.-No. 175302 R220G € 4,250.00

+ 1 2 3

€ 3,329.00

REMS CamSys 2 Set S-Color S 30 H

High resolution special colour camera Ø 25 mm, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 50 –150 mm, drains, shafts, stacks and other cavities.
Art.-No. 175303 R220G € 4,450.00

+ 1 2 3

€ 3,595.00

REMS CamSys 2 Set S-Color S-N 30 H

High resolution special colour camera Ø 33 mm, self-levelling, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 70–150 mm, drains, shafts, stacks and other cavities.
Art.-No. 175304 R220G € 4,840.00

€ 3,829.00





REMS Explorer

tracker for localising a camera head with a 33 kHz transmitter
Art.-No. 175312 R

€ 2,120.00

REMS Cat – Saws everything anywhere.

REMS Cat VE
1050 W – 3,0 kg

Info



German quality product

REMS 22V LI-ION TECHNOLOGY 5,0 Ah 9,0 Ah

REMS Cat 22 V VE
500 W – 3,1 kg

Info



Description		Art.-No.	€	Offer €
REMS Cat VE Set In sturdy steel case.	Electric universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing.	560040 R110G	629.00	**565.00**
REMS Cat 22 V VE Set Battery Li-Ion 22 V, 5,0 Ah, 108 Wh, Rapid charger FC 12/22 V, 100 – 240 V, 50 – 60 Hz, 120 W. In sturdy steel case.	Akku-Universal-Säbelsäge mit Vario-Elektronik (VE) zum frei Hand Sägen.	560052 R220G	1,300.00	**985.00**
REMS Cat 22 V VE Set\P Wie Art.-No. 560052, Without battery, without rapid charger. In sturdy steel case.	Akku-Universal-Säbelsäge mit Vario-Elektronik (VE) zum frei Hand Sägen.	560054 R22	865.00	**695.00**

REMS Tiger – Reciprocating pipe saws

400 % additional sawing force for effortless, super fast sawing!



6" chain guide holder



REMS Tiger
1050 W – only 3 kg

Info



REMS Tiger SR
1400 W – 3,1 kg

Info

German quality product

REMS 22V LI-ION TECHNOLOGY 9,0 Ah

REMS Tiger 22 V VE
500 W – only 3,4 kg

Info



Description		Art.-No.	€	Offer €
REMS Tiger Set In sturdy steel case.	Electric pipe reciprocating saw for fast, easy, right-angled sawing with guide holder and for free-hand sawing.	560020 R110G	767.00	**659.00**
REMS Tiger Set K In sturdy steel case.	Same as Art.-No. 560020 R220, but with 6" chain guide holder.	560021 R110G	837.00	**729.00**
REMS Tiger SR Set In sturdy steel case.	Electric pipe reciprocating saw with Speed Regulation (SR) for fast, easy, right-angled sawing with guide holder and for free-hand sawing.	560026 R110G	860.00	**745.00**
REMS Tiger SR Set K In sturdy steel case.	Same as Art.-No. 560026 R220, but with 6" chain guide holder.	560028 R110G	930.00	**825.00**
REMS Tiger 22 V VE Set Battery Li-Ion 22 V, 9,0 Ah, 194 Wh, Rapid charger FC 12/22 V, 100 – 240 V, 50 – 60 Hz, 120 W. In sturdy steel case.	Cordless pipe reciprocating saw with Vario Electronics (VE) for effortless, fast, right-angled sawing with guide holder and for free-hand sawing.	560053 R220G	1,430.00	**1,089.00**
REMS Tiger 22 V VE Set\P Same as Art.-No. 560053, Without battery, without rapid charger. In sturdy steel case.	Cordless pipe reciprocating saw with Vario Electronics (VE) for effortless, fast, right-angled sawing with guide holder and for free-hand sawing.	560055 R22	906.00	**735.00**
6" chain guide holder	For pipes Ø ⅛ – 6" etc.	563203 R	220.00	

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS special saw blades

→ REMS Tiger, etc.




Designation	Ø Zoll/ Length mm	Tooth pitch mm	Material*	Teeth	Quantity pieces	Art.-No.	€	Offer €
REMS special saw blade 2"/140-2.5 steel pipes ≤ 2"	2"/140	2.5	HSS-Bi	corrugated	5	561007 R05	66.30	**51.70**
REMS special saw blade 2"/140-3.2 steel pipes ≤ 2"	2"/140	3.2	HSS-Bi	corrugated	5	561001 R05	61.90	**50.50**
REMS special saw blade 4"/200-3.2 steel pipes ≤ 4"	4"/200	3.2	HSS-Bi	corrugated	5	561002 R05	82.10	**61.50**
REMS special saw blade 6"/260-3.2 steel pipes ≤ 6"	6"/260	3.2	HSS-Bi	corrugated	5	561008 R05	107.00	**83.40**

For materials that are difficult to cut, e.g. stainless steel pipes, hard cast iron pipes, instead of the REMS special saw blade the fine-toothed REMS universal saw blade in connection with REMS Tiger SR with electronic stroke number regulation. *HSS-Bi: bimetal high speed steel

REMS universal saw blades

→ REMS Tiger, REMS Cat, REMS Cat 22V, etc..



Designation	Ø Zoll/ Length mm	Tooth pitch mm	Material*	Teeth	Quantity pieces	Art.-No.	€	Offer €
REMS universal saw blade 100-1.8/2.5 for all sawing work	100	Combo 1.8/2.5	HSS-Bi flexible	straight-set	5	561006 R05	42.70	**36.40**
REMS universal saw blade 150-1.8/2.5 for all sawing work	150	Combo 1.8/2.5	HSS-Bi flexible	straight-set	5	561005 R05	61.00	**48.40**
REMS universal saw blade 200-1.8/2.5 for all sawing work	200	Combo 1.8/2.5	HSS-Bi flexible	straight-set	5	561003 R05	80.70	**61.50**
REMS universal saw blade 300-1.8/2.5 for all sawing work	300	Combo 1.8/2.5	HSS-Bi flexible	straight-set	5	561004 R05	120.00	**88.80**

Also for wood with nails, pallets. For materials that are difficult to cut, e.g. stainless steel, hard cast iron, a low stroke number is necessary, e.g. by REMS Tiger SR with electronic stroke number regulation. *HSS-Bi: bimetal high speed steel

REMS saw blades for metal

→ REMS Puma, REMS Cat, REMS Cat 22V, REMS Tiger, etc.

Designation	Ø Zoll/ Length mm	Tooth pitch mm	Material*	Teeth	Quantity pieces	Art.-No.	€
REMS saw blade 150-1 sheet metal, metal, also stainless steel, ≥ 1.2 mm	150	1	HSS-Bi flexible	corrugated	5	561105 R05	27.50
REMS saw blade 200-1 sheet metal, metal, also stainless steel, ≥ 1.2 mm	200	1	HSS-Bi flexible	corrugated	5	561106 R05	36.10
REMS saw blade 90-1.4, curved blade metal, also stainless steel, ≥ 1.5 mm	90	1.4	HSS-Bi	corrugated	5	561107 R05	25.60
REMS saw blade 150-1.4 metal, also stainless steel, ≥ 1.5 mm	150	1.4	HSS-Bi flexible	corrugated	5	561104 R05	28.80
REMS saw blade 200-1.4 metal, also stainless steel, ≥ 1.5 mm	200	1.4	HSS-Bi flexible	corrugated	5	561108 R05	36.30
REMS saw blade 100-1.8 metal, also stainless steel, ≥ 2 mm	100	1.8	HSS-Bi flexible	corrugated	5	561101 R05	24.60
REMS saw blade 150-1.8 metal, also stainless steel, ≥ 2 mm	150	1.8	HSS-Bi flexible	corrugated	5	561103 R05	28.80
REMS saw blade 200-1.8 metal, also stainless steel, ≥ 2 mm	200	1.8	HSS-Bi flexible	corrugated	5	561102 R05	36.10
REMS saw blade 200-2.5 metal, also stainless steel, ≥ 3 mm	200	2.5	HSS-Bi flexible	straight-set	5	561109 R05	36.10
REMS saw blade 280-2.5 metal, also stainless steel, ≥ 3 mm	280	2.5	HSS-Bi flexible	straight-set	5	561112 R05	45.60

REMS saw blades for wood and metal

→ REMS Puma, REMS Cat, REMS Cat 22V, REMS Tiger, etc.

Designation	Ø Zoll/ Length mm	Tooth pitch mm	Material*	Teeth	Quantity pieces	Art.-No.	€
REMS saw blade 210-1.8/2.5 round tip, no sticking pallets, wood, wood with nails, metal ≥ 2.5 mm	210	Combo 1.8/2.5	HSS-Bi flexible	straight-set	5	561113 R05	37.10
REMS saw blade 150-2.5 wood, wood with nails, pallets, metal ≥ 3 mm	150	2.5	HSS-Bi flexible	straight-set	5	561110 R05	27.50
REMS saw blade 225-2.5, extra thick, for disassembly wood, wood with nails, metal ≥ 3 mm	225	2.5	HSS-Bi	corrugated	3	561114 R03	35.30
REMS saw blade 300-2.5, extra thick, for disassembly wood, wood with nails, metal ≥ 3 mm	300	2.5	HSS-Bi	corrugated	3	561116 R03	47.10
REMS saw blade 300-4.2 wood	300	4.2	WS	straight-set	5	561111 R05	33.60
REMS saw blade 225-3.2/5.0 wood, wood with nails	225	Combo 3.2/5.0	HSS-Bi flexible	straight-set	5	561117 R05	41.90
REMS saw blade 290-5.0/6.35 green wood	290	Combo 5.0/6.35	WS	straight-set	5	561118 R05	45.60
REMS saw blade 150-6.35 wood	150	6.35	WS	straight-set	5	561119 R05	19.50

REMS saw blades for different purposes

→ REMS Puma, REMS Cat, REMS Cat 22V, REMS Tiger, etc.

Designation	Ø Zoll/ Length mm	Tooth pitch mm	Material*	Teeth	Quantity pieces	Art.-No.	€
REMS saw blade 150-4.2 breeze blocks, plasterboard	150	4.2	WS	straight-set	5	561115 R05	24.10
REMS saw blade 225-8.5 breeze blocks, hard wood	225	8.5	HM	straight-set	1	561120 R01	62.40
REMS saw blade 300-8.5 breeze blocks, hard wood	300	8.5	HM	straight-set	1	561121 R01	74.90
REMS saw blade 400-8.5 breeze blocks, hard wood	400	8.5	HM	straight-set	1	561122 R01	109.00
REMS saw blade 235-12 breeze blocks, pumice, brick	235	12	HM	straight	1	561123 R01	86.90
REMS saw blade 300-12 breeze blocks, pumice, brick	300	12	HM	straight	1	561124 R01	100.60
REMS saw blade 300-12, extra high blade breeze blocks, pumice, brick	300	12	HM	straight	1	561125 R01	120.00
REMS saw blade 200 cast iron etc.	200		HM-G		2	561126 R02	36.00

REMS Turbo – Burr-reduced, right angle, rapid.



German quality product

Info



Info

Description		Art.-No.	€	+ 1 REMS circular saw blade + 1 stand	Offer €
REMS Turbo Cu-INOX Basic Circular pipe saw with universal double clamping vice for burr-reduced, right angle, rapid sawing.	For stainless steel pipes, carbon steel pipes and copper pipes of the press fitting systems etc.	849006 R110G	1,370.00	849X01 R110G	1,365.00
REMS Turbo K Basic Universal circular metal sawing machine with automatic cooling lubricant unit.	For straight cuts and bevel cuts up to 45°.	849007 R110G	1,720.00	849X02 R110G	1,599.00

Info

German quality product



Only 1.9 kg

REMS Nano – cutting up to Ø 40 mm.

Ultra-light. Fast. Right-angled. Chipless.
No outside burr. Dry.

Unique! Patent EP 2 077 175

Optimum engagement of the cutting wheel to the pipe to be cut.

REMS Nano Basic-Pack

Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10 – 40 mm, without outer burr. For pipes of the press fitting systems made of stainless steel, carbon steel, Ø 12 – 28 mm, copper Ø 10 – 35 mm. Multilayer composite tubes Ø 10 – 40 mm. With maintenance-free gear, proven 110 V, 50 – 60 Hz, 130 W DC motor. Speed 130 rpm. Back pressure rollers made of hardened precision steel. Safety switch. Single open ended wrench size 8. Without cutting wheel. In carrying bag.
Art.-No. 844010 R110G € 561.00

€ 515.00

REMS cutting wheel Cu-INOX

for pipes of press fitting systems made of: stainless steel, carbon steel, copper — Art.-No. 844050 R — € 40.80

REMS cutting wheel V

for multilayer composite tubes — Art.-No. 844051 R — € 40.80

L-Boxx system case

with inlay for REMS Nano/Nano 12 V, rapid charger, battery, REMS REG 8 – 35, 2 x REMS cutter wheels, metre rule — Art.-No. 844045 R — € 149.00

Info

REMS technology li-ion

German quality product



Only 2.1 kg

REMS Nano 12 V – cutting up to Ø 40 mm.

Mobile, handy, ultra-light. Fast. Right-angled. Chipless.
No outside burr. Dry.

Unique! Patent EP 2 077 175

Optimum engagement of the cutting wheel to the pipe to be cut.

REMS Nano 12 V Basic-Pack

Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10 – 40 mm, without outer burr. For pipes of the press fitting systems made of stainless steel, carbon steel, Ø 12 – 28 mm, copper Ø 10 – 35 mm. Multilayer composite tubes Ø 10 – 40 mm. With maintenance-free gear, powerful battery motor 10.8 V, 270 W. Speed 130 rpm. Safety switch. Battery Li-Ion 10.8 V, 2.5 Ah, rapid charger 220 – 240 V, 50 – 60 Hz, 10.8 – 18 V, 65 W. Counter pressures rollers made of hardened precision steel. Single open ended wrench size 8. Without cutting wheel. In carrying bag.
Art.-No. 844011 R220G € 741.00

€ 645.00

REMS cutting wheel Cu-INOX

for pipes of press fitting systems made of: stainless steel, carbon steel, copper — Art.-No. 844050 R — € 40.80

REMS cutting wheel V

for multilayer composite tubes — Art.-No. 844051 R — € 40.80

L-Boxx system case

with inlay for REMS Nano/Nano 12 V, rapid charger, battery, REMS REG 8 – 35, 2 x REMS cutter wheels, metre rule — Art.-No. 844045 R — € 149.00

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS Secco – For drying and dehumidification.

Powerful, hightly efficient air dehumidifier/building drier for drying rooms, e.g. after mains water damage, flooding, dehumidification of damp cellar rooms etc. and for fast drying of concrete, masonry, plaster and screed for example. For commercial use in trade and industry.

Dehumidification rate ≤ 80 l / 24 h
Air volume ≤ 850 m³/h

Info 80

Info 50



Dehumidification rate ≤ 50 l / 24 h
Air volume ≤ 265 m³/h





REMS Secco 80 Set

Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and condensation motor 230 V, 50 Hz, 680 W, with automatic hot-gas thawing system, for continuous operation. Very quiet running. Dehumidification rate ≤ 80 l/24 h, air volume ≤ 850 m³/h. Electronic control unit with illuminated 3" display and memory function. Electronic hygrostat, operating hours counter, electricity meter. Air filter. In a sturdy sheet steel housing on a mobile tubular steel frame with large castors. In a carton.
Art.-No. 132010 R220 € 2,310.00



Super offer!
You will get 1 REMS Detect W moisture measuring device free when you buy a REMS Secco 80 set. You have an additional saving of € 250.00.

Art.-No. 132X01 R220G € 1,910.00

REMS Secco 50 Set

Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and capacitor motor 230 V, 50 Hz, 760 W, with automatic thawing system, for continuous operation. Very quiet running. Dehumidification rate ≤ 50 l/24 h, air volume ≤ 265 m³/h. Electronic control unit with large, illuminated display and memory function. Electronic humidity switch. Air filter. Internal 7.7 l condensation tank. In sturdy plastic housing with casters. In a carton.
Art.-No. 132011 R220G € 819.00

€ 705.00

11.5 litre condensation tank

for discharge of condensation in the sheet steel housing.
Art.-No. 132100 R

€ 61.30

Exhaust air set

consisting of exhaust air hose Ø 200 mm, 10 m long, with metal fastening eyes for hanging up on site, with connecting flange, for distribution of the exhaust air in the room, for dehumidifying cavities, e.g. above intermediate ceilings and for additional blowing of wet surfaces.
Art.-No. 132104 R

€ 339.00

REMS Detect W

dielectric moisture measuring device for non-destructive moisture measurement in building materials, e.g. concrete, masonry, plaster, wood
Art.-No. 132115 R

€ 250.00



For supporting electric dehumidifiers/construction driers.

REMS Orkan – For aeration.

Info



REMS Orkan 2050

Electric construction ventilator for commercial use. For aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms. Especially also for drying of, e.g., concrete, masonry, plaster and screed. Capacitor motor 230 V, 50 Hz, 355 / 450 W, for continuous operation. Very quiet running. Air volume 1,740/2,050 m³/h. In a sturdy plastic housing. In a carton.
Art.-No. 132301 R220G € 452.00

€ 265.00

REMS RAS St – Robust quality tool for cutting steel pipes. Meets high demands and long service life.



* German quality product

Info

Description	Pipes Ø inch/mm	Art.-No.	€	Offer €
REMS RAS St ⅛–2" *	⅛–2" 10–60	113000 R	243.00	**185.00**
REMS RAS St 1¼–4" *	1¼–4" 30–115	113100 R	442.00	**355.00**

REMS RAS P/SW 45/L – Robust quality tool with two cutting systems for cutting and slitting plastic corrugated protective pipes.



Info

Description	Pipes Ø inch/mm	Art.-No.	€	Offer €
REMS RAS P/SW 45/L	≤ 45 mm / ≤ 1¾"	113480 R	60.80	**50.50**

REMS RAS W INOX – Highly resistant quality tool for cutting corrugated metal hoses (corrugated pipes) made of stainless steel, also jacketed.



German quality product

Info

Description	Pipes	Art.-No.	€	Offer €
REMS RAS W INOX 10-32/40 S on needle bearings	DN 10–32 (40) / ⅜–1½" (2")	113450 R	232.00	**189.00**

REMS RAS P – The compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use. Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.



Info

Description	Pipes Ø inch/mm	Art.-No.	€	Offer €
P 10–32 T	10–32 ½–1⅜"	290001 R	61.70	**51.40**
P 10–40 T	10–40 ½–1⅝"	290002 R	74.20	**61.60**

REMS RAS Cu – Robust quality tools for cutting tubes.

Ideal for cutting copper pipes.

Quick adjustment of the engagement spindle in both directions.

Compact design for tough use. Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.





* German quality product

Info

Description	Pipes Ø inch/mm	Art.-No.	€	Offer €
Cu 3–16	3–16 ⅛–⅝"	113250 R	30.50	**24.60**
Cu 3–25	3–25 ⅛–1"	113255 R	36.90	**30.80**
Cu 3–28	3–28 ⅛–1⅛"	113260 R	42.20	**35.90**
Cu 3–35	3–35 ⅛–1⅜"	113340 R	61.70	**46.20**
Cu 3–42	3–42 ⅛–1¾"	113320 R	74.20	**58.60**
Cu 8–42 * with quick adjustment	8–42 ⅜–1⅝"	113370 R	166.00	**123.00**
Cu 8–64 * with quick adjustment	8–64 ⅜–2½"	113410 R	199.00	**143.00**

REMS RAS Cu-INOX – Robust quality tools for cutting tubes.

Ideal for cutting copper pipes, thin-walled, stainless steel pipes, thin-walled steel, aluminium and brass pipes.

Compact design for tough use. Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.





* German quality product

Info

Description	Pipes Ø inch/mm	Art.-No.	€	Offer €
Cu-INOX 3–16	3–16 ⅛–⅝"	113200 R	30.50	**26.80**
Cu-INOX 3–25	3–25 ⅛–1"	113230 R	36.90	**30.90**
Cu-INOX 3–28 Mini	3–28 ⅛–1⅛"	113240 R	42.20	**37.10**
Cu-INOX 3–28	3–28 ⅛–1⅛"	113300 R	36.00	**30.90**
Cu-INOX 3–35	3–35 ⅛–1⅜"	113350 R	64.80	**43.70**
Cu-INOX 3–42	3–42 ⅛–1¾"	113330 R	81.70	**55.60**
Cu-INOX 6–42 *	6–42 ¼–1⅝"	113380 R	170.00	**136.00**
Cu-INOX 6–64 *	6–64 ¼–2½"	113400 R	199.00	**159.00**

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS RAS P – High performance quality tools for cutting pipes. With quick adjustment.

Ideal for cutting plastic and composite pipes.

Very stable spindle, long spindle guide and specially hardened back pressure rollers. Exact guiding on the pipe, easy engagement, easy cutting and accurate, right-angled cut as a result. Quick adjustment of the engagement spindle in both directions.



* German quality product

Info

Description	Pipes Ø inch/mm	Art.-No.	€	Offer €
P 10–40 * with quick adjustment	10–40 ⅜–1⅝"	290050 R	164.00	**128.00**
P 10–63 * with quick adjustment	10–63 ⅜–2"	290000 R	210.00	**142.00**
P 50–110, s11 * with quick adjustment	50–110 2–4"	290100 R	251.00	**195.00**
P 50–125, s16 with quick adjustment	50–125 2–5"	290500 R-S16	259.00	**208.00**
P 110–160 * with quick adjustment	110–160 4–6"	290200 R	308.00	**249.00**

REMS RAS Cu-INOX S – Robust quality tools for cutting tubes.

Ideal for cutting copper pipes, thin-walled, stainless steel pipes, thin-walled steel, aluminium and brass pipes. With needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting.



* German quality product

Info

Description	Pipes Ø inch/mm	Art.-No.	€	Offer €
Cu-INOX 3–28 S Mini on needle bearings	3–28 ⅛–1⅛"	113241 R	59.40	**49.00**
Cu-INOX 3–35 S on needle bearings	3–35 ⅛–1⅜"	113351 R	84.80	**62.90**
Cu-INOX 8–42 S * on needle bearings, with quick adjustment	8–42 ⅜–1⅝"	113385 R	175.00	**129.00**
Cu-INOX 8–64 S * on needle bearings, with quick adjustment	8–64 ⅜–2½"	113401 R	221.00	**163.00**

REMS ROS PEX 28 S – Robust quality tool for clean, fast cutting of pipes in one cut.

Stable magnesium version. For one-hand operation.
Ideal for cutting PEX pipes.



Info

Description	Pipes ≤ Ø mm/inch	Art.-No.	€	Offer €
REMS ROS PEX 28 S	28 / 1⅛"	291420 R	92.60	**76.20**

REMS ROS P 26 / SW 35 S – Robust quality tool for clean, fast cutting of pipes in one cut.

With integrated pipe cutter for protective corrugated tubes. Stable magnesium version. For one-hand operation. Ideal for cutting composite pipes and PEX pipes.



Info

Description	Pipes ≤ Ø mm/inch	Art.-No.	€	Offer €
REMS ROS P 26/SW 35 S	P 26/1" SW 35/1⅜"	291242 R	123.00	**79.90**

REMS ROS P – Handy quality tools for clean, fast pipe cuts. For thin-walled pipes also. Sturdy aluminium/magnesium version. For single-hand operation. Ideal for cutting plastic and composite pipes.





Info

Description	Pipes ≤ Ø mm/inch	Art.-No.	€	Offer €
P 26	26 1"	291240 R	60.70	**46.30**
P 35 with quick reverse	35 1⅜"	291200 R	66.20	**54.50**
P 35 A with automatic quick reverse	35 1⅜"	291220	84.30	**69.90**
P 42 with quick reverse	42 1⅝"	291250 R	146.00	**97.80**

Description	Pipes ≤ Ø mm/inch	Art.-No.	€	Offer €
P 42 PSS with quick reverse	42 1⅝"	291460 RPSS	88.90	**59.90**
P 42 S with quick reverse	42 1⅝"	291010 R	100.70	**75.60**
P 63 P with quick reverse	63 2"	291270 R	175.00	**119.00**
P 63 S with quick reverse	63 2"	291290 R	193.00	**140.00**

REMS ROS P flex – Robust quality tool for clean, fast cutting of pipes in one cut.

Info



Stable magnesium version. For one-hand operation. Ideal for cutting flexible plastic hoses and soft plastic pipes.

Description	Pipes ≤ Ø mm/inch	Art.-No.	€	Offer €
P flex 14	14 9/16"	291400 R	57.10	**45.20**
P flex 22	22 ⅞"	291410 R	63.70	**49.90**
P flex 28 S on needle bearings	28 1⅛"	291430 R	89.70	**69.90**

REMS Cento / REMS Cento 22 V – Cutting and deburring up to Ø 115 mm.

Right-angled. Chipless. Without outer burr. Dry. Ultra-fast, e.g. INOX Ø 54 mm in only 4 seconds.





Info

Unique! Patent EP 1 782 904
Driven cutting wheel and straight in-feed for fast cutting

1200 W
Only 17 kg

German quality product



REMS Cento Basic

Pipe cutting machine for fast, right angled cutting of pipes Ø 8–115 mm, without outer burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 8–108 mm. For steel pipes EN 10255 (DIN 2440) DN 6–100, Ø ⅛–4", Ø 10–115 mm, cast iron pipes (SML) EN 877 (DIN 19522) DN 50–100, plastic tubes SDR 11, wall thickness s ≤ 10 mm, Ø 10–110 mm, Ø ⅛–4", composite tubes Ø 10–110 mm. With maintenance-free gear, proven 110 V, 50–60 Hz, 1200 W universal motor. Speed 115 rpm. Rollers made of hardened precision steel for pipes Ø 22–115 mm, Ø ¾–4". Safety foot switch. Ring spanner. Without cutting wheel. For workbench, stand or wheel stand. In a carton.
Art.-No. 845001 R110G € 1,560.00

REMS cutting wheel Cu-INOX free!
Value € 115.00

Art.-No. 845X02 R110G € 1,439.00

Info

500 W
Only 17,6 kg

German quality product

REMS 22V LI-ION TECHNOLOGY 5,0 Ah 9,0 Ah



REMS Cento 22 V – Li-Ion 22 V, 5.0 Ah, 108 Wh battery, for 280 cuts of Ø 22 mm stainless steel press fitting system pipe with one battery charge*.

REMS Cento 22 V Basic

Cordless pipe cutting machine for fast, right angled cutting of pipes Ø 8–115 mm, without outer burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 8–108 mm. For steel pipes EN 10255 (DIN 2440) DN 6–100, Ø ⅛–4", Ø 10–115 mm, cast iron pipes (SML) EN 877 (DIN 19522) DN 50–100, plastic tubes SDR 11, wall thickness s ≤ 10 mm, Ø 10–110 mm, Ø ⅛–4", composite tubes Ø 10–110 mm. With maintenance-free gear, powerful 22 V battery motor. Speed 84 rpm. Machine status check with overload protection, temperature monitoring, battery charging status check. Rollers made of hardened precision steel for pipes Ø 22–115 mm, Ø ¾–4". Safety foot switch. FC 12/22 V, 100–240 V, 50–60 Hz, 120 W rapid charger. Ring spanner. Without cutting wheel. For workbench, stand or wheel stand. In a carton.
Art.-No. 845002 R220G € 2,180.00

REMS cutting wheel Cu-INOX free!
Value € 115.00

Art.-No. 845X04 R220G € 1,845.00

REMS Cento 22 V Basic\P

Same as Art.-No. 845002. Without battery, without rapid charger. Without cutting wheel.
Art.-No. 845007 R22 € 1,840.00

€ 1,549.00

*ambient temperature approx. 20°C.

REMS REG – Robust quality tool for removing outer and inner burr from pipes.



For stainless steel pipes, other steel pipes, copper, brass, aluminium and plastic pipes.

Info

REMS REG 8–35

Outer/inner pipe burr remover for pipes Ø 8–35 mm, ⅜–1⅜".
Art.-No. 113825 R € 71.40

€ 49.90

Info

REMS REG 10–54

Outer/inner pipe burr remover for pipes Ø 10–54 mm, ½–2⅛".
Art.-No. 113830 R € 81.20

€ 59.90

Patent EP 2 058 067

Info

REMS REG 10–54 E – also for electric drive

Outer/inner pipe burr remover for pipes Ø 10–54 mm, ½–2⅛". Also for electric drive by REMS Helix 22 V VE and other power drills/screwdrivers (speed ≤ 300 rpm), by the REMS Cento and REMS Cento 22 V pipe cutting machines or by the REMS Turbo Cu-INOX pipe circular sawing machine.
Art.-No. 113835 R € 150.00

€ 119.00







 € excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

Cento

Cento 22 V



L-Boxx H





Stand

Wheel stand





Accessory Pack 1





Accessory Pack 2





Accessory Pack 3

Accessory Pack 4

Accessories REMS Cento / REMS Cento 22 V

Cutting wheel Cu-INOX
for pipes of press fitting systems made of stainless steel, copper, carbon steel
Art.-No. 845050 R — € 115.00

REMS cutting wheel Cu
especially for pipes of the press fitting systems made of copper
Art.-No. 845053 R — € 115.00

Cutting wheel St
for steel pipes, cast pipes (SML)
Art.-No. 845052 R — € 115.00

Cutting wheel V, s 10
for plastic and multilayer composite tubes, wall thickness s ≤ 10 mm
Art.-No. 845051 R — € 115.00

Cutting wheel C-SF
for cutting carbon steel pipes and simultaneously producing a welding chamfer
Art.-No. 845055 R — € 115.00

Cutting wheel INOX Ø 168 x 2
Art.-No. 845056 R — € 151.00

REMS REG 28 – 108
Inside pipe deburring device for pipes of Ø 28 – 108 mm, Ø ¾ – 4".
For electrical rotary drive by the cutting wheel of the pipe cutting machine REMS Cento, REMS Cento 22 V (with REMS cutting wheel art. no. 845050 or 845053).
Art.-No. 113840 R € 356.00 — € 309.00

L-Boxx H system case
for REMS Cento / REMS Cento RF
Art.-No. 845085 R — € 153.00

Feed lever with spring plug
for operating the drive unit on the floor
Art.-No 845218 R — € 97.70

Pipe support 1
height adjustable, for pipes Ø 40 – 110 mm, Ø 1½ – 4", with operation of the drive unit with feed lever on the floor
Art.-No 845220 R — € 163.00

Hardened, precision tubular steel rollers (pack of 4)
Art.-No. 845118 R — € 229.00

Stainless tubular steel INOX rollers (pack of 4)
Art.-No. 845110 RINOX — € 324.00

Marking device
for marking the insertion depth for fittings on pipes.
For REMS Cento, REMS Cento 22 V.
Art.-No. 845530 R — € 139.00

Stand
Art.-No. 849315 R — € 232.00

Wheel stand
Art.-No. 849310 R — € 376.00

Accessory Pack 1
consisting of stand and REMS Herkules 3B
Art.-No. 120X01 R € 589.00 — € 483.00

Accessory Pack 2
consisting of Jumbo, Herkules 3B and Herkules Y
Art.-No. 120X02 R € 1,048.00 — € 845.00

Accessory Pack 3
consisting of Jumbo E and Herkules 3B
Art.-No. 120X03 R € 665.00 — € 550.00

Accessory Pack 4
consisting of wheel stand and REMS Herkules 3B
Art.-No. 120X04 R € 733.00 — € 577.00

REMS DueCento – Cutting up to Ø 225 mm.

Right angled. Chip-free. Ready for welding. Fast.
Without outside burr. Dry. Universal for many pipe types.

Unique! Patent EP 1 782 904
Driven cutting wheel and straight in-feed for fast cutting

Info

German quality product



REMS DueCento Basic

Pipe cutting machine for fast, right angled cutting of pipes Ø 40 – 225 mm, without outside burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 54 – 225 mm. For steel pipes EN 10255 (DIN 2440) DN 40 – 150, Ø 1½ – 6", cast pipes (SML) EN 877 (DIN 19522) DN 50 – 200, plastic tubes SDR 11, wall thickness s ≤ 21 mm, Ø 40 – 225 mm, Ø 1¼ – 8", composite tubes Ø 40 – 110 mm. With maintenance-free gears, proven universal motor 110 / 230 V, 50 – 60 Hz, 1,200 W. Speed 115 rpm. Hardened, precision tubular steel rollers for pipes Ø 100 – 225 mm, Ø 4 – 6". Safety foot switch. Ring spanner. Without cutter wheel. 2 height adjustable pipe supports 1 for pipes Ø 100 – 225 mm, Ø 4 – 8". In a carton.
Art.-No. 845004 R110G € 3,080.00



Super offer!
You get 3 cutting wheels of your choice free when you buy a REMS DueCento Basic! An additional saving of between € 345.00 and € 453.00.

Art.-No. 845X03 R110G € 2,999.00



Info

REMS SSM 160KS – Compact and robust.

Heating element according to DVS. Electronic temperature control. High quality PTFE coating. Closed plane housing. With quick clamping device, also for angled outputs.

REMS SSM 160KS

Heating element butt welding machine for plastic tubes and mouldings made of PB, PE, PP, PVDF. PE Ø 40–90 mm SDR ≥ 6, PE Ø 40–110 mm SDR ≥ 9, PE Ø 40–125 mm SDR ≥ 11, PE Ø 40–140 mm SDR ≥ 17, PE Ø 40–160 mm SDR ≥ 21. Heating element butt welding device with PTFE-coated heating element 110 V, 50–60 Hz, 1200 W. Adjustable temperature 180–290°C, preset for PE tubes. Electronic temperature control. Protective cover for heating element. Electrical planing device 230 V, 50–60 Hz, 500 W. Pressing device. Quick clamping device, also for inclined outlets, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Sheet steel base with installed drawer. Operating key. Closed sheet steel underframe = transport box.
Art.-No. 252046 R110G € 6,825.00

€ 5,899.00



Info


REMS SSM 315RF – Convenient for job site and workshop.

Heating element according to DVS. Electronic temperature control. High quality PTFE coating. Closed plane housing. With quick clamping device.

REMS SSM 315RF

Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 90–180 mm SDR ≥ 6, PE Ø 90–200 mm SDR ≥ 7.4, PE Ø 90–225 mm SDR ≥ 9, PE Ø 90–250 mm SDR ≥ 13.6, PE Ø 90–280 mm SDR ≥ 17, PE Ø 90–315 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V, 50–60 Hz, 3000 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50–60 Hz, 500 W. Pressing device. 2 quick clamping devices Ø 315 mm with 2 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. 2 pipe supports Ø 315 mm with pipe support inserts Ø 90, 110, 125, 160, 200, 250 mm. Ring spanner. Boxes for clamping and pipe rest inserts. Tubular stand on wheels.
Art.-No. 255020 R110G € 15,818.00

€ 13,799.00



Info

REMS SSG – Heating element according to DVS.

Electronic temperature control.
High-quality PTFE coating.



REMS SSG 180 EE

Butt welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. PTFE-coated heating element 230 V, 50–60 Hz. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Support stand. In a carton.
Art.-No. 250220 R110G € 824.40

€ 735.00

up to 2"



German quality product

*ambient/water temperature approx. 20°C.



High cooling performance, e.g. ¾" steel pipe in just 9 min*.

REMS Frigo 2 F-Zero – Electrically freeze instead of emptying. Ultra-fast up to 2".

Info

One-piece freezing heads for the main working range Ø ¼ – 1" or Ø 15 – 35 mm, no reducer inserts required. Very compact freezing heads with specially geometrically designed recesses for holding the respective different pipe diameters. Very narrow, only 50 mm wide. Can be used everywhere, even in narrow places. No pastes/greases required.

REMS Frigo 2 F-Zero Set

Electrical pipe freezing device with closed coolant circuit. For steel, copper, plastic, multilayer composite pipes, Ø ⅛–2", Ø 10–60 mm. Cooling unit 110 V, 50 Hz, 430 W, 2 coolant hoses, 2.5 m long, 2 clamping straps, 2 LCD digital thermometer, spray bottle. Equipment for Ø ¼–1¼", 15–42 mm. In sturdy steel housing. In a carton.
Art.-No. 131012 R110G € 1,950.00

€ 1,360.00



Upgrade kit 1½–2" / 54–60 mm
Art.-No. 131160 R

€ 257.00

up to 2"





German quality product

REMS Eskimo – Freezing instead of draining.

Super fast. Automatic refrigerant feed.

Very narrow, indestructible freezing sleeves. High cooling performance, e.g. ¾" steel pipe in just 4 min.*

Info

REMS Eskimo Set


Pipe freezing device for carbon dioxide coolant. For steel, cast iron, lead, copper, plastic pipes Ø ⅛–2", Ø 10–60 mm. Two freezing jackets each in 10 different sizes for the whole working range, flange connection with T-junction, locking nut, 2 handles with injector, 2 high-pressure hoses. In sturdy carrying case.
Art.-No. 130002 R € 636.00

€ 489.00

*ambient/water temperature approx. 18°C.

Info

German quality product

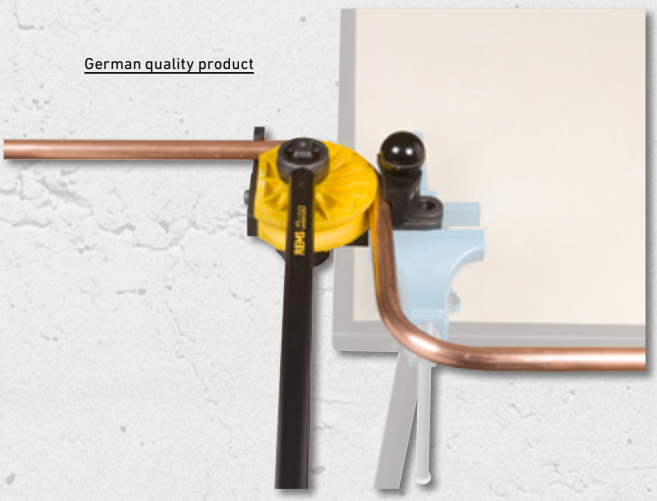

REMS Sinus

Universal for many tubes. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Only one type of bending and back formers for REMS Sinus and REMS Curvo.

REMS Sinus Basic-Pack

Hand tube bender Ø 10–32 mm, Ø ⅜–⅞", up to 180°. Hard, half-hard, soft copper tubes, also thin-wall Ø 10–22 mm, Ø ⅜–⅞", coated soft copper tubes, also thin-wall Ø 10–18 mm, pipes of the press fitting systems made of stainless steel, carbon steel (coated) Ø 12–18 mm, soft precision steel tubes Ø 10–22 mm, soft precision steel tubes, Ø 10–20 mm, electric conduit EN 50086, Ø 16–20 mm, multi-layer composite tubes Ø 14–32 mm and others. Drive unit, insert bolt. Bending and back formers not included. See list in table. REMS bending spray. In sturdy steel case.
Art.-No. 154010 R € 500.00

€ 479.00







Info

German quality product

REMS Hydro-Swing 22 V – Bending tubes where they are installed. Mobile, handy, light. Universally usable for many pipe types.

Li-Ion 22 V, 2.5 Ah, 54 Wh battery, for approx. 110 stainless steel pipe bends of the Ø 22 mm press fitting systems with one battery charge*.

XL-BOXX

REMS 22V Li-Ion Technology 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Hydro-Swing 22 V

Cordless tube bender Ø 10 – 32 mm, Ø ⅜ – 1⅛", up to 90°. Soft copper pipes Ø 10 – 22 mm, Ø ⅜ – ⅞", s ≤ 1 mm, soft, coated copper pipes Ø 10 – 18 mm, Ø ⅜ – ⅝", s ≤ 1 mm, pipes of the press fitting systems made of soft coated carbon steel Ø 12 – 18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10 – 18 mm, s ≤ 1.5 mm, composite tubes Ø 14 – 32 mm. Electro-hydraulic drive with powerful battery motor 22 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, rapid charger C 12 / 22 V, 100 – 240 V, 50 – 60 Hz, 100 W. Up to Ø 26 mm with bending formers, back former support H-S Ø 10 – 26 mm with back formers. Up to Ø 32 mm with bending formers, 2 back former supports Ø 10 – 26 mm and Ø 32 mm with back formers. In XL-Boxx system case.

Soft copper pipes etc.

Set 12 + 15 + 18 + 22
Art.-No. 153410 RX22G € 1,439.00

€ 1,229.00

Composite tubes etc.

Set 16 + 18 + 20 + 25/26 + 32
Art.-No. 153417 R220G € 1,649.00

€ 1,389.00

Composite tubes, Soft copper pipes etc.

Set 10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22 + 25/26 + 32, ⅜ + ½ + ⅝ + ¾ + ⅞"
Art.-No. 153418 RX22G € 1,859.00

€ 1,559.00



Hydro-Swing 22 V Basic-Pack\P

Without battery, without rapid charger.
Without bending formers, without back former supports.
In XL-Boxx system case.
Art.-No. 153402 R22 € 849.00

€ 749.00



REMS Hydro-Swing 22 V INOX

REMS Hydro-Swing 22 V with aluminium bending formers, especially also for
Geberit Mapress Stainless Steel (EN 10088, 1.4401),
Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free),
Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)),
Viega Sanpress (EN 10088, 1.4401),
Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Pipes for press fitting systems made of stainless steel, Soft copper pipes etc.

Set 15+18+22
Art.-No. 153419 R220G € 1,479.00


€ 1,299.00

*ambient temperature approx. 20°C.

REMS Swing – Bend pipes where they are laid, up to Ø 32 mm.

Info

Ultra fast operation by practical multifunction lever for fast in-feed and fast return.Hardened steel rack.

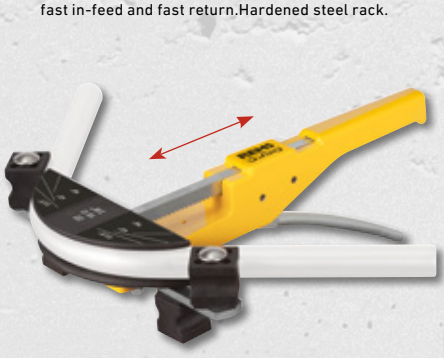



German quality product



REMS Swing Set 16 + 20 + 25 / 26 + 32

Soft copper pipes Ø 10 – 22 mm, Ø ⅜ – ⅞", s ≤ 1mm, soft, coated copper pipes Ø 10 – 18 mm, Ø ⅜ – ⅝", s ≤ 1 mm, soft, coated carbon steel pipes of the pressfitting systems Ø 12 – 18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10 – 18 mm, s ≤ 1 mm, composite tubes Ø 14 – 32 mm. Up to Ø 26 mm with drive unit, bending formers, back former supports S Ø 10 – 26 mm with back formers, in a sturdy steel box/case. Up to Ø 32 mm with drive unit, bending formers, 2 back former supports Ø 10 – 26 mm and Ø 32 mm with back formers, in a sturdy steel case.
Art.-No. 153029 R € 609.00

€ 525.00

REMS Swing UP Set 16 + 20 + 25 + 32

Single-hand tube bender Ø 16 – 32 mm, up to 90°. for Uponor Uni Pipe PLUS composite pipes Ø 16 – 32 mm. With UP drive unit, UP bending formers with smaller bending radii, UP back former supports Ø 16 – 32 mm with back formers, in a sturdy steel box/case.
Art.-No. 153030 R € 587.00

€ 479.00

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.







Info

German quality product

REMS Hydro-Swing – Effortless working due to oil-hydraulic force transmission. Ideal for composite tubes up to Ø 32 mm.

Also for stainless steel pipes up to Ø 22 mm.

REMS Hydro-Swing

Oil-hydraulic hand pipe bender Ø 10–32 mm, Ø ⅜–⅞", up to 90°. Soft copper pipes Ø 10–22 mm, Ø ⅜–⅞", s ≤ 1 mm, soft, coated copper pipes Ø 10–18 mm, Ø ⅜–⅝", s ≤ 1 mm, pipes of the press fitting systems made of soft coated carbon steel Ø 12–18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10–18 mm, s ≤ 1.5 mm, composite tubes Ø 14–32 mm. Up to Ø 26 mm with drive unit, bending formers, back former support H-S Ø 10–26 mm with back formers, in a sturdy steel case. Up to Ø 32 mm with drive unit, bending formers, 2 back former supports Ø 10–26 mm and Ø 32 mm with back formers, in a sturdy steel case.



Soft copper pipes etc.

Set 12 + 15 + 18 + 22
Art.-No. 153525 RX € 745.00

€ 599.00

Composite tubes etc.

Set Set 16+20+25/26+32
Art.-No. 153529 R € 823.00

€ 599.00

Composite tubes, Soft copper pipes etc.

Set 10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22 + 25/26 + 32, ⅜ + ½ + ⅝ + ¾ + ⅞"
Art.-No. 153528 RX € 905.00

€ 725.00



REMS Hydro-Swing INOX

REMS Hydro-Swing with aluminium bending formers, especially also for
Geberit Mapress Stainless Steel (EN 10088, 1.4401),
Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free),
Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)),
Viega Sanpress (EN 10088, 1.4401),
Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Pipes for press fitting systems made of stainless steel, Soft copper pipes etc.

Set 15 + 18 + 22
Art.-No. 153510 R € 819.00

€ 655.00



German quality product



Tripod (accessory)



REMS Python – Save expensive fittings. Super easy bending up to Ø 2", Ø 75 mm.

Info

REMS Python

Oil-hydraulic pipe bender for dimensionally accurate bending of pipes up to 90°. Steel pipes EN 10225 Ø ⅜–2", multilayer composite tubes Ø 32–75 mm. Drive unit with back former supports, upper back former support with laterally adjustable back former support bearing plate, 2 back formers, bending formers St or V. In sturdy transport case.

Steel pipes

Set St ⅜ + ½ + ¾ + 1 + 1¼"
Art.-No. 590020 R € 1,800.00

€ 1,429.00

Steel pipes

Set St ½ + ¾ + 1 + 1¼ + 1½ + 2"
Art.-No. 590021 R € 1,930.00

€ 1,549.00

Multilayer composite tubes

Set V 40 + 50 + 63 mm
Art.-No. 590022 R € 1,830.00

€ 1,495.00

Tripod
Art.-No. 590150 R

€ 181.00

Bending former and back formers 75 mm
Art.-No. 590063 R

€ 748.00

REMS Curvo / REMS Curvo 22 V – Bending pipes up to Ø 40 mm, 180°.

REMS Curvo – Bending instead of expensive fittings!

Info



1000 W – only 8 kg

German quality product

REMS Curvo	Art.-No.	€	Offer €
Basic-Pack	580010 R110G	1,410.00	1,139.00

REMS Curvo 22 V – Mobile, handy, light.

Info



only 8,5 kg

German quality product

REMS 22V LI-ION TECHNOLOGY 5,0 Ah | 9,0 Ah

REMS Curvo 22 V	Art.-No.	€	Offer €
Basic-Pack	580014 R220G	2,200.00	1,489.00



Machine support 3B
height adjustable,on tripod
Art.-No. 586100 R

€ 261.00

*ambient temperature approx. 20°C.

*) REMS Curvo/Curvo 22 V Sets are delivered with bending formers and back formers with the respectively smaller radius, see catalogue.



REMS Curvo 22 V – Bending pipes up to Ø 40 mm, 180°.

REMS Curvo 22 V Set 15-22-28

Cordless tube bender Ø 10–40 mm, Ø ¼–1⅛", up to 180°. Drive unit with maintenance-free gear and safety slipping clutch, powerful 22 V battery motor, stepless electronic safety switch, right and left-hand rotation, insert bolt. Battery Li-Ion 22 V, 5,0 Ah, 108 Wh, FC 12/22 V, 100–240 V, 50–60 Hz, 120 W rapid charger. Bending formers and back formers. In sturdy steel case.
Art.-No. 580096 R220G € 2,982.00

+ **Machine support 3B**
Art.-No. 586100 R € 25.00

+ **REMS tool bag**
Art.-No. 190302 R € 25.00

Art.-No. 580X06 R220G € 2,189.00

REMS Curvo 50 – Bending large pipes up to Ø 50 mm, 90°.



Info

REMS Curvo 50 Basic-Pack

Electric pipe and tube bender Ø 10–50 mm, up to 90°. Steel pipes EN 10255 Ø ¼–1¼", stainless steel pipes EN ISO 1127, EN 10217-7, Ø ½–1¼", s ≤ 2,6 mm, hard, semi-hard, soft copper pipes, Ø 10–42 mm, thin-walled copper pipes Ø 10–35 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 Ø ⅜–1⅝", pipes of the press fitting systems of stainless steel Ø 12–42 mm, carbon steel Ø 12–42 mm, coated carbon steel Ø 12–28 mm, composite tubes Ø 14–50 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation. Adaptor block 35–50, Support 35–50, insert bolt. In sturdy steel case.
Art.-No. 580110 R110G € 3,700.00

€ 3,145.00

Bending formers and back formers

Bending formers and back formers, 180°, form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide or aluminum 90° (Ø 21.3 R 103, Ø 26.9 R 102, Ø 33.7 R 100, Ø 35 R 100, Ø 42 R 140, Ø 42.4 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140). Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers.





Info


List price –20 %

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.



REMS Herkules XL 12" – Extra stable for pipes up to 12".

Info

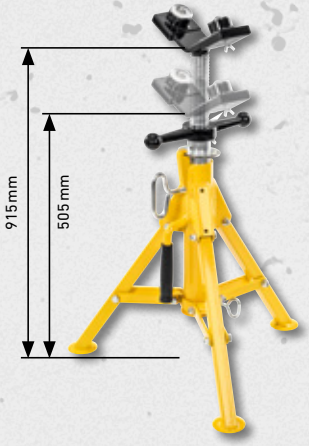

REMS Herkules XL 12"
Height adjustable, fold-up for pipes, solid material Ø 1¼ – 12", Ø 42 – 324 mm.
Load capacity ≤ 450 kg. In a carton.
Art.-No. 120125 R € 386.00

€ 315.00

REMS Aquila 3B
Mobile pipe machining station. Safe clamping of pipes up to 6". Everywhere on site.

Info

Ø 10 – 165 mm, ⅛ – 6"





REMS Aquila 3B
Pipe workstation with chain pipe vice for clamping pipes, solid material, Ø 10 – 165 mm, Ø ⅛ – 6". Work plate with integrated chain pipe vice with double clamping jaws, pipe rest, tool holders, 3 benders for bending pipes Ø 10 – 26 mm, Ø ⅜ – ¾", clamping head. Folding tripod stand with shelf plate. Load capacity ≤ 450 kg.
In a carton.
Art.-No. 120270 R

€ 564.00

REMS Aquila WB
Safe clamping of pipes up to 6".

Info



Ø 10 – 165 mm, ⅛ – 6"

German quality product

REMS Aquila WB
High quality chain pipe vice for clamping pipes, solid material, Ø 10 – 165 mm, Ø ⅛ – 6". Base plate with integrated chain pipe vice with double clamping jaws, pipe rest, bending device. For work bench. In a carton.
Art.-No. 120250 R € 332.00

€ 295.00



Work plate	1100 × 700 × 26 mm
Working height	800 mm
Weight	28 kg
Load capacity	≤ 300 kg

Work plate	800 × 600 × 22 mm
Working height	800 mm
Weight	23 kg
Load capacity	≤ 300 kg

REMS Jumbo – Assembled and disassembled at lightning speed.

Info



REMS Jumbo
Folding workbench with toggle catch. Work plate in accordance with DIN 68 705.
In a carton.
Art.-No. 120200 R € 475.00

€ 365.00

REMS Jumbo E
Folding workbench with toggle catch. Work plate in accordance with DIN 68 705.
In a carton.
Art.-No. 120240 R € 308.00

€ 259.00







German quality product



REMS Central – The compact stock for all applications.

Info

Proven, robust, compact quality thread cutting stock with excellent cutting properties.

- Very slim ratchet head for working in places with difficult access.
- Dividable pipe arm for short ratchet travel and confined workspaces.
- Easy changing of the quick-change die heads.
- Unique locking for secure seat when starting and during cutting.

REMS Central Set R ½ + ¾ + 1 + 1 ¼
Manual thread cutting stock with lockable quick-change die heads. For pipe threads ⅜ – 2". Ratchet levers ⅜ – 1¼". Quick-change die heads R ½ + ¾ + 1 + 1 ¼" with dies for conical pipe threads ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand. In sturdy steel case.
Art.-No. 479025 R € 449.00

€ 349.00

REMS eva – The die stock for professionals.

Info

Very easy starting and thread cutting by precision processing of the die head, dies and cover in a compact unit.
Ratchet lever of steel, thick plastic jacket.





German quality product

REMS eva Set R ½+¾+1+1¼
Manual die stock with quick-change die heads. For pipe threads ⅛ – 2", 16 – 50 mm, bolt threads 6 – 30 mm, ¼ – 1". For right and left-hand threads. 1 ratchet lever for the entire cutting range. Quick-change die heads R ½-¾-1-1¼ with dies for conical pipe threads ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand. In sturdy steel case.
Art.-No. 520015 € 523.00

€ 420.00

REMS eva Set R ½+¾+1+1¼+1½+2
Manual die stock with quick-change die heads R ½-¾-1-1¼-1½-2.
In sturdy steel case.
Art.-No. 520017 € 727.00

€ 595.00

REMS Amigo – Ideal for threading electrical conduit pipes.







Info

REMS Amigo Set M 20 + 25 + 32
Electric die stock with quick-change die heads. For pipe threads ⅛ – 1¼", 16 – 40 mm, bolt threads 6 – 30 mm, ¼ – 1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50 – 60 Hz, 1200 W, safety tip switch, power increase thanks to automatic carbon brush adjustment. Peak power input up to 1800 W. Right and left-hand rotation, overload protection switch. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand, for pipe thread taper Pipe Thread ASME B1.20.1 NPT right-hand or for threading electric conduit according to EN 60423 M. In sturdy steel case.
Art.-No. 530027 R110G € 1,100.00

€ 739.00

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS Amigo / REMS Amigo 2 / REMS Amigo 22 V – Electric die stock with quick-change die heads.



REMS Amigo
1200 W – Only 3,5 kg

Info

German quality product



REMS Amigo 2
1700 W – Only 6,5 kg

Info



REMS Amigo 22 V
500 W – Only 5,6 kg

Info

REMS 22V LI-ION TECHNOLOGY 9,0 Ah

Description	REMS eva quick-change die heads	Art.-No.	€	REMS Amigo 2 Set + REMS Aquila 3B Value € 2,414.00	Offer €
REMS Amigo Set M 16-20-25-32 In sturdy steel case.	For threads for electrical installation pipes DIN EN 60423 M.	530022 R110G	1,250.00		875.00
REMS Amigo 2 Set R ½ + ¾ + 1 + 1¼ + 1½ + 2 In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	540020 R110G	1,850.00		1,465.00
REMS Amigo 2 Set R ½ + ¾ + 1 + 1¼ + 1½ + 2 In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	540020 R110G	1,850.00	540X01 R110G	1,919.00
REMS Amigo 22 V Set R ½ + ¾ + 1 In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	530015 R220G	2,010.00		1,579.00
REMS Amigo 22 V Set M 20-25-32 In sturdy steel case.	For threads for electrical installation pipes DIN EN 60423 M.	530016 R220G	2,140.00		1,579.00
REMS Amigo 22 V Set\P R ½ + ¾ + 1 Same as Art.-No. 530015 Without battery, without rapid charger. In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	530017 R22	1,560.00		1,219.00



Info

German quality product



Info

DW-0201DP0693

W1.303

7808-649

REMS Spezial – High alloy thread cutting oil

Mineral oil-based, can be washed out with water.

REMS Spezial canister 5 l
Art.-No. 140100 R € 79.70

€ 63.30

REMS Spezial spray 600 ml
Art.-No. 140105 R € 25.00

€ 19.75

REMS Sanitol – mineral oil-free thread cutting oil.

Completely soluble in water. Mineral oil-free, ethanol-free. Dyed red for wash-out check. Excellent corrosion protection.

REMS Sanitol canister 5 l
Art.-No. 140110 R € 185.00

€ 147.00

REMS Sanitol spray 600 ml
Art.-No. 140115 R € 36.00

€ 28.80

German quality product



Info

REMS Tornado – A class on its own.

Automatic clamping chuck
Universal automatic die head
Automatic lubrication cooling

REMS Tornado 2000

Threading machine for pipe threads (1/16) ⅛–2", 16–63 mm, bolt threads (6) 10–60 mm, ¼–2". With maintenance-free gear, safety foot switch with emergency stop, 2 automatic clamping chucks, automatic lubrication cooling. With tool set, consisting of a universal automatic die head for all threads, including long threads, automatically opening, with automatic thread length for conical threads, dies for conical pipe thread, ISO 7-1, EN 10226 (DIN 2999, BSPT) R ½–¾ and R 1–2 right, pipe cutter, pipe inside burr remover, pressing lever. Height-adjustable material shelf. 110 V, 50–60 Hz, 1700 W universal motor. 53 rpm. Portable version on tripod, with large, removable oil basin and chip tray.

Art.-No. 340200 R110G € 4,972.00

+ 1 REMS Spezial oil 5 l Art.-No. 140100 R € 79.70

€ 5,051.70

€ 3,289.00

REMS Magnum – Robust, compact, high-performance machine for thread cutting, cropping, deburring, nipple cutting, roll grooving.

FREE



Info

REMS Magnum 2000 L-T



Optional Extra
Collapsible wheel stand
Art.-No. 344150 R

Info

REMS Magnum 3000 L-T



Info

REMS Magnum 4000 L-T



German quality product

Description				Art.-No.	€	Offer €
REMS Magnum 2000 L-T Threading machine for pipe threads (1/16) ⅛–2", 16–63 mm, bolt threads (6) 8–60 mm, ¼–2". In a carton.	+ REMS wheel stand + 1 REMS Spezial oil 5 l	Art.-No. 344100 R Art.-No. 140100 R	€ 526.00 € 79.70	340226 R110G	5,029.00	**3,799.00**
REMS Magnum 3000 L-T Threading machine for pipe threads (1/16) ½–3", 16–63 mm, bolt threads (6) 18–60 mm, ½–2". In a carton.	+ REMS wheel stand + 1 REMS Spezial oil 5 l	Art.-No. 344100 R Art.-No. 140100 R	€ 526.00 € 79.70	380309 R110G	7,400.00	**5,039.00**
REMS Magnum 4000 L-T Threading machine for pipe threads (1/16) ½–4", 16–63 mm, bolt threads (6) 18–60 mm, ½–2". In a carton.	+ REMS wheel stand + 1 REMS Spezial oil 5 l	Art.-No. 344100 R Art.-No. 140100 R	€ 526.00 € 79.70	380444 R110G	8,290.00	**6,479.00**
Collapsible wheel stand				344150 R	753.00	

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS roll grooving attachment – Compact – universal. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller.

Info





German quality product

REMS roll grooving attachment

Roll grooving attachment for grooving pipes of pipe coupling systems DN 25 – 300, 1 – 12". Roll grooving attachment, hydraulic hand pump, built-in ring gauge for automatic groove-depth-stop, 1 pair of groove rollers (pressure roller, counter-pressure roller) 2 – 6", Allen key. For REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact, REMS Tornado and REMS Magnum or for other thread cutting machine makes. In a carton.
Art.-No. 347000 R € 2,400.00


€ 2,055.00







With quick-change device



Quick-change device

Quick-change device for driving the REMS roll grooving device with REMS Magnum thread cutting machines without dismantling the tool set and the plastic hose for thread cutting material, as an accessory. Lightning-fast changeover between thread cutting and roll grooving for flexible and efficient working.
Art.-No. 347115 R

€ 266.00



Info

German quality product

REMS Collum – Electric roll groover up to 12".

REMS Collum

Roll grooving machine for grooving pipes for pipe coupling systems DN 25 – 300, 1 – 12". Roll grooving attachment, manual hydraulic pump, integrated, graduated ring gauge for automatic groove depth stop, 1 pair of grooving rollers (pressure roller, counterpressure roller) 2–6", Allen key. Choice of 3 drive units, with maintenance-free gear, powerful universal motor, safety switch. For workbench, stand or wheel stand. In a carton.

REMS Collum
Universal motor 230 V, 50 – 60 Hz, 1200 W, overload protection. 29 min^{-1}.
Art. No. 347006 R110G € 2,950.00

€ 2,725.00

REMS Collum 2
Universal motor 230 V, 50 – 60 Hz, 1700 W. 28 min^{-1}
Art. No. 347008 R110G € 3,270.00

€ 2,959.00

REMS Collum 2 Compact
Universal motor 230 V, 50 – 60 Hz, 1200 W, overload protection. 26 min^{-1}
Art. No. 347009 R110G € 3,270.00

€ 2,959.00

Stands and material support see below.





Info

German quality product

REMS Collum 22 V – Electric roll groover up to 12". Mobile, fast, economical.

Li-Ion 22 V, 9.0 Ah, 194 Wh battery, for approx. 23 DN 100/4" grooves with one battery charge.

REMS 22V LI-ION TECHNOLOGY 9,0 Ah

REMS Collum 22 V

Cordless roll groove machine for grooving pipes for DN 25 – 300, 1 – 12" pipe coupling systems. Roll grooving attachment, manual hydraulic pump, integrated, graduated ring gauge for automatic groove depth stop, 1 pair of grooving rollers (pressure roller, counterpressure roller) 2–6", Allen key. Drive unit with maintenance-free gear, powerful battery motor 22 V, 500 W. Safety switch. Right and left-hand rotation, machine status check with overload protection, temperature monitoring, battery charging status check. Li-Ion 22 V, 9.0 Ah, 194 Wh battery, FC 12/22 V, 100 – 240 V, 50 – 60 Hz, 120 W rapid charger. Support bracket for both directions. For workbench, stand or wheel stand. In a carton.
Art.-No. 347005 R220G € 3,990.00

€ 3,549.00

Stand
Art. No. 849315 R € 232.00

Wheel stand
Art. No. 849310 R € 376.00

REMS Herkules 3B
Material support, heigth adjustable, for pipes DN 25 – 150, Ø 1 – 6"
Art. No. 120120 R € 357.00

Accessory Pack 1
consisting of stand and REMS Herkules 3B
Art.-No. 120X01 R € 589.00

€ 483.00

Accessory Pack 4
consisting of wheel stand and REMS Herkules 3B
Art.-No. 120X04 R € 733.00

€ 577.00



Info

REMS Picus S1 – The low cost alternative

Now with REMS Simplex 2 drill stand

Robust, handy drill stand for core drilling up to Ø 200 mm. Drill column made of rigid, unbendable square precision steel tube Ø 50 mm, cold solidified, with extra narrow tolerance, for low-vibration guiding of the slide

REMS Picus S1 Basic-Pack

Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete up to ≤ Ø 102 (132) mm, masonry and other materials up to ≤ Ø 162 mm. For dry or wet drilling, hand held or with drill stand. Drive unit with drilling crown male connection thread UNC 1¼, female connection thread G ½, maintenance-free gear with safety slip clutch, 110 V / 230 V, 50 – 60 Hz, 1850 W universal motor. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock Personal protection switch (PRCD). Load speed drilling spindle 580 rpm. Water supply device with adjustable shutoff valve and quick coupling with water stop and ½" hose connection. Stabiliser. Drill start aid G ½ UDKB with Ø 8 mm drill, size 3 Allen key. Size 32 opened ended wrench. In sturdy steel case.
Art.-No. 180010 R110G € 1,740.00

€ 1,255.00

REMS Picus S1 Set Simplex 2

Same as Art.-No. 180010, but with REMS Simplex 2 drill stand including fastening set for masonry and concrete. Without diamond core drilling crowns.
Art.-No. 180032 R110G € 2,830.00

€ 1,975.00



Info

One system – 4 applications!

Ideal for plumbers! Now with REMS Titan drill stand – for highest demands. For core drilling up to Ø 250 mm.

Speed-Regulation (Patent EP 2 085 191)
The electronic speed control that is being used keeps the selected speed constant, also under load.

REMS Picus SR Set Titan

Electric diamond core drilling machine with speed regulation. For core drilling in concrete, steel-reinforced concrete up to ≤ Ø 162 (200) mm, masonry and other materials up to ≤ Ø 250 mm. For dry or wet drilling, hand held or with drill stand. Drive machine with drilling crown connection thread UNC 1¼ male, G ½ female, maintenance-free 2-step gear with safety slip clutch, 110 V, 50–60 Hz, 2200 W universal motor. Stepless electronic speed regulation 200 rpm to 500 rpm (1st gear) or 500 rpm to 1200 rpm (2nd gear), overheating protection. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Water supply device with adjustable shut-off valve and quick coupling with water stop and ½" hose connection. Stabiliser. Spacer set. Single open ended wrench size 32. In sturdy steel case. Drill stand REMS Titan including fastening kit for masonry and concrete. Without diamond core drilling crowns.
Art.-No. 183022 R110G € 3,280.00

€ 2,625.00

German quality product

REMS Picus SR Set 62-82-132 Titan

Same as Art.-No. 183022, but with REMS Universal diamond core drilling crowns UDKB Ø 62, 82, 132 mm.
Art.-No. 183023 R110G € 3,790.00

€ 3,050.00



Info



REMS Picus S2/3.5 – For core drillings in steel-reinforced concrete etc. up to Ø 300 mm.

REMS Picus S2/3,5 Set Titan

Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed, Ø 40–300 mm. For dry or wet drilling with drill stand. Drive machine with drilling crown male connection thread UNC 1¼, maintenance-free 2-step gear with safety slip clutch, 110 V, 50–60 Hz, 3420 W universal motor. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Rocker switch. Personal protection switch (PRCD). Load speed drilling spindle 320 rpm, 760 rpm. Water supply device with adjustable shutoff valve and quick coupling with water stop and ½" hose connection. Easy loosening ring. Single open-ended wrench size 32. Drill stand REMS Titan including fastening kit for masonry and concrete. Without diamond core drilling crowns. In a box.
Art.-No. 180030 R110G € 5,040.00

€ 4,385.00

 € excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS Universal diamond core drilling crowns / REMS universal diamond core drilling crowns LS (LASER)

For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

Diamond segments with wedge-shaped cut ("roof shape") for fast, easy and quiet drilling. Specially developed, high quality diamond segments with high diamond content and special bonding for excellent drilling performance and very long life.

REMS Universal diamond core drilling crowns

Inductively soldered! Resolderable!



Ø × drilling depth × connection		Art.-No.	€	Offer €
UDKB 32 × 420 × UNC 1¼	4	181010 R	152.00	106.00
UDKB 42 × 420 × UNC 1¼	4	181015 R	142.00	99.00
UDKB 52 × 420 × UNC 1¼	5	181020 R	151.00	106.00
UDKB 62 × 420 × UNC 1¼	6	181025 R	164.00	115.00
UDKB 72 × 420 × UNC 1¼	7	181030 R	186.00	130.00
UDKB 82 × 420 × UNC 1¼	7	181035 R	202.00	141.00
UDKB 92 × 420 × UNC 1¼	8	181040 R	228.00	160.00
UDKB 102 × 420 × UNC 1¼	8	181045 R	234.00	164.00
UDKB 112 × 420 × UNC 1¼	9	181050 R	247.00	173.00
UDKB 122 × 420 × UNC 1¼	10	181055 R	279.00	195.00
UDKB 127 × 420 × UNC 1¼	10	181059 R	290.00	203.00
UDKB 132 × 420 × UNC 1¼	11	181060 R	302.00	211.00
UDKB 152 × 420 × UNC 1¼	12	181065 R	359.00	251.00
UDKB 162 × 420 × UNC 1¼	12	181070 R	380.00	266.00
UDKB 182 × 420 × UNC 1¼	12	181075 R	421.00	295.00
UDKB 200 × 420 × UNC 1¼	12	181080 R	445.00	312.00
UDKB 225 × 420 × UNC 1¼	13	181085 R	542.00	379.00
UDKB 250 × 420 × UNC 1¼	14	181090 R	556.00	389.00
UDKB 300 × 420 × UNC 1¼	22	181095 R	728.00	510.00

REMS universal diamond core drilling crowns LS (LASER)

Laser-welded! High temperature-resistant!



Ø × drilling depth × connection		Art.-No.	€	Offer €
UDKB LS 32 × 420 × UNC 1¼	1	181410 R	167.00	117.00
UDKB LS 42 × 420 × UNC 1¼	4	181415 R	156.00	109.00
UDKB LS 52 × 420 × UNC 1¼	5	181420 R	166.00	116.00
UDKB LS 62 × 420 × UNC 1¼	6	181425 R	180.00	126.00
UDKB LS 72 × 420 × UNC 1¼	6	181430 R	205.00	144.00
UDKB LS 82 × 420 × UNC 1¼	7	181435 R	222.00	155.00
UDKB LS 92 × 420 × UNC 1¼	8	181440 R	251.00	176.00
UDKB LS 102 × 420 × UNC 1¼	9	181445 R	257.00	180.00
UDKB LS 112 × 420 × UNC 1¼	9	181450 R	272.00	190.00
UDKB LS 122 × 420 × UNC 1¼	10	181455 R	307.00	215.00
UDKB LS 127 × 420 × UNC 1¼	10	181459 R	319.00	223.00
UDKB LS 132 × 420 × UNC 1¼	10	181460 R	332.00	232.00
UDKB LS 152 × 420 × UNC 1¼	11	181465 R	395.00	277.00
UDKB LS 162 × 420 × UNC 1¼	12	181470 R	418.00	293.00
UDKB LS 182 × 420 × UNC 1¼	13	181475 R	505.00	354.00
UDKB LS 200 × 420 × UNC 1¼	14	181480 R	534.00	374.00

The low price Starter Set. Ideal for pipework installers.



REMS UDKB Set 52+112+132
Ø 52, 112, 132 mm
Art.-No. 181102 R € 700.00

€ 490.00



REMS UDKB LS Set 52+112+132
Ø 52, 112, 132 mm
Art.-No. 181112 R € 770.00

€ 539.00

REMS Pull 2 – For dry and wet suction.

Constantly high suction performance by permanent automatic filter cleaning. Certified for collecting health hazardous dusts in accordance with EN 60335-2-69[1].

Info





Description	Art.-No.	€	Offer €
REMS Pull 2 L Set In a carton.	185600 R220G	843.00	735.00
REMS Pull 2 L Set W In a carton.	185603 R220G	1,263.00	1,139.00

Description	Art.-No.	€	Offer €
REMS Pull 2 M Set In a carton.	185601 R220G	1,130.00	1,019.00
REMS Pull 2 M Set D In a carton.	185604 R220G	1,316.00	1,119.00

[1] Observe the national regulations for the collection and disposal of health hazardous dusts.





REMS Picus DP – Core drilling without water with micro-pulse technology. Clean, simple, fast, e.g. 200 mm in steel-reinforced concrete Ø 62 mm only 5 minutes.

In combination with the REMS Pull 2 M (see page 35) vacuum cleaner, ideal for core drilling in finished rooms, e.g. in residential, office and industrial buildings.

Info

REMS Picus DP Basic-Pack

Electric diamond core drilling machine with micro-pulse technology for core drilling without water in concrete, steel-reinforced concrete ≤ Ø 162 (202) mm, masonry and other materials ≤ Ø 202 mm, hand held or with drill stand. Drive unit with drilling crown male connection thread UNC 1¼, female connection thread G ½, maintenance-free gear with safety slip clutch, 110 V / 230 V, 50 – 60 Hz, 2200 W universal motor, integrated dust extraction. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Load speed drilling spindle 880 rpm. Stabiliser. Drill start aid G ½ TDKB with Ø 8 mm drill, size 3 Allen key. Size 32 opened ended wrench. In sturdy steel case.
Art.-No. 180016 R110G € 2,740.00

€ 2,249.00

REMS Picus DP Set Simplex 2

REMS Picus DP Basic-Pack with REMS Simplex 2 drilling stand including tools and fastening set for masonry and concrete.
Art.-No. 180033 R110G € 3,830.00


€ 3,040.00

REMS Picus DP Set Titan

REMS Picus DP Basic-Pack with REMS Titan drilling stand including tools and fastening set for masonry and concrete.
Art.-No. 180035 R110G € 4,390.00

€ 3,529.00





Info



REMS Detect B – For exact determination of the in and out centres of through-bores.

Professional, electronic bore hole centre tracking device consisting of a transmitter and receiver unit, for exact determination of the in and out centres when drilling through-bores and for automatic display of the material thickness ≤ 120 cm.

REMS Detect B Set

Professional, electronic bore hole centre tracking device consisting of a transmitter and receiver unit. With acoustic and optical navigation with red/green LEDs and display with LED technology, battery charge indicator with LED, 6 batteries 1.5 V, AAA, LR3, frequently reusable adhesion points, in sturdy case.

	Art.-No.	€	Offer €
REMS Detect B Set	182100 R5	679.00	629.00

 € excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.



Info

REMS Picus DWP – With micro-pulse technology. Ideal for hand-guided drilling in particularly hard materials. For dry or wet drilling.

In combination with the REMS Pull 2 M (see page 35) vacuum cleaner, ideal for core drilling in finished rooms, e.g. in residential, office and industrial buildings.





REMS Picus DWP Basic-Pack

Electric diamond core drilling machine with micro-pulse technology for dry and wet drilling in concrete, steel-reinforced concrete ≤ Ø 162 (202) mm, masonry and other materials ≤ Ø 202 mm, hand held or with drill stand. Drive unit with drilling crown male connection thread UNC 1¼, female connection thread G ½, maintenance-free gear with safety slip clutch, 110 V / 230 V, 50 – 60 Hz, 2200 W universal motor, integrated dust extraction. Connection for vacuum cleaner, connection with water supply device, replaceable. Multi-function electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Load speed drilling spindle 880 rpm. Stabiliser. Drill start aid G ½ TDKB with Ø 8 mm drill, size 3 Allen key. Size 32 opened ended wrench. In sturdy steel case.

Art.-No. 180017 R220G € 3,140.00

€ 2,435.00

REMS Picus DWP Set Simplex 2

REMS Picus DWP Basic-Pack with REMS Simplex 2 drilling stand including tools and fastening set for masonry and concrete.

Art.-No. 180037 R220G € 4,230.00

€ 3,385.00

REMS Picus DWP Set Titan

REMS Picus DWP Basic-Pack with REMS Titan drilling stand including tools and fastening set for masonry and concrete.

Art.-No. 180038 R220G € 4,790.00

€ 3,805.00

REMS dry diamond core drilling crowns LS (LASER)

Especially for dry drilling with core drilling machines with micro-pulse technology.

Universally usable for many materials, hand held or with drill stand. Uniform UNC 1¼ female connection thread. Drilling depth 320 mm.

Specially developed, high quality diamond segments with high diamond content and special bonding for excellent drilling performance and very long life.

Diamond segments with diamonds positioned in the bonding agent for fast, easy and quiet drilling. Laser-welded on fully automatic welding machines for consistent high quality of the weld High temperature-resistant, even under extreme temperature load, no desoldering of the segments due to overheating.

Driven by a REMS Picus DP, REMS Picus DWP drive unit and suitable drive units of other makes with UNC 1¼ outer connecting thread.

Also suitable for wet drilling.

**Laser-welded!
High temperature-resistant!**



Info



Ø × drilling depth × connection		Art.-No.	€	Offer €
TDKB LS 32 × 320 × UNC 1¼	3	181500 R	183.00	128.00
TDKB LS 42 × 320 × UNC 1¼	4	181502 R	171.00	120.00
TDKB LS 52 × 320 × UNC 1¼	5	181504 R	182.00	127.00
TDKB LS 62 × 320 × UNC 1¼	5	181506 R	198.00	139.00
TDKB LS 72 × 320 × UNC 1¼	6	181508 R	225.00	158.00
TDKB LS 82 × 320 × UNC 1¼	6	181510 R	244.00	171.00
TDKB LS 92 × 320 × UNC 1¼	6	181512 R	274.00	192.00
TDKB LS 102 × 320 × UNC 1¼	7	181514 R	281.00	197.00
TDKB LS 112 × 320 × UNC 1¼	7	181516 R	296.00	207.00
TDKB LS 122 × 320 × UNC 1¼	8	181532 R	340.00	238.00
TDKB LS 127 × 320 × UNC 1¼	8	181518 R	353.00	247.00
TDKB LS 132 × 320 × UNC 1¼	8	181520 R	362.00	253.00
TDKB LS 142 × 320 × UNC 1¼	8	181522 R	388.00	272.00
TDKB LS 152 × 320 × UNC 1¼	8	181524 R	432.00	302.00
TDKB LS 162 × 320 × UNC 1¼	9	181526 R	458.00	321.00
TDKB LS 182 × 320 × UNC 1¼	9	181528 R	505.00	354.00
TDKB LS 202× 320 × UNC 1¼	10	181530 R	535.00	375.00

[1] Observe the national regulations for the collection and disposal of health hazardous dusts.





Info



German quality product

REMS Krokodil – Chasing instead of chiselling.

Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed.

L-BOXX H

REMS Krokodil 180 SR Basic-Pack

Electric diamond chasing and cutting grinder with speed regulation. For chasing and cutting, e.g. concrete, steel-reinforced concrete, masonry of all kinds, natural stone, screeds of all kinds. Chase depth ≤ 61 mm, continuously adjustable. Chasing width ≤ 62 mm, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft Ø 22.2 mm, for 1, 2 or 3 diamond cutting discs in accordance with EN 13236, ≤ Ø 180 mm, with maintenance-free gear, 110 V, 50 – 60 Hz, 2,000 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection. Overheating protection. Connecting cable 5.7 m. Restart protection in case of mains failure. Safety switch with lock. Load speed 3,300 rpm. Suction nozzle for connecting a vacuum cleaner/dust extractor (e.g. REMS Pull 2 M). Pin wrench size 13. In L-Boxx system case H.
Art.-No. 185012 R110G € 1,320.00



+ gift package with a value € 200.20*
2 REMS universal diamond cutting disc LS H-P Ø 180 mm

Art.-No. 185X07 R110G € 1,185.00

REMS dust protection door U





REMS dust protection door U 1200 × 2200 mm

Made of sturdy, dust-tight PE film 100 µ, recyclable, with 2-way zipper for flexible choice of opening/closing point. Double reversible slider with long handles for easy operation from the inside and outside. Individually cuttable, easy to attach with suitable adhesive tape. Reusable. In a pressure seal bag.
Art.-No. 132309 R

€ 24.50

REMS dust protection door S





REMS dust protection door S 1200 × 2200 mm

Made of extra sturdy, dust-tight PE film 150 µ, recyclable, with 2-way zipper for flexible choice of opening/closing point, can be divided at the bottom for barrier-free access. Double reversible slider with long handles for easy operation from inside and outside. Can be cut to size, easy to attach with suitable adhesive tape. Reusable. In a pressure seal bag.
Art.-No. 132310 R

€ 26.60

One battery system for all 22 V tools!

Highly resistant Li-Ion 22 V batteries with 2.5, 5.0 or 9.0 Ah capacity for long service life. 50 % more energy.* Powerful and light.



REMS 22V Li-ION TECHNOLOGY 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Power-Pack 22 V FC

2 Li-Ion 22 V batteries, Rapid charger FC 12/22 V, 100 – 240 V, 50 – 60 Hz, 120 W.

	Art.-No.	€	Offer €
2,5 Ah + 2,5 Ah + FC 120 W, 108 Wh	571590 R220G	603.00	419.00
2,5 Ah + 5,0 Ah + FC 120 W, 162 Wh	571059 R220G	759.50	459.00
5,0 Ah + 5,0 Ah + FC 120 W, 216 Wh	571591 R220G	803.00	499.00
9,0 Ah + 9,0 Ah + FC 120 W, 388 Wh	571592 R220G	1,003.00	615.00



REMS 22V Li-ION TECHNOLOGY 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Power-Pack 22 V SFC

2 Li-Ion 22 V batteries, Rapid charger SFC 22 V, 100 – 240 V, 50 – 60 Hz, 290 W.
For shorter charging times.

	Art.-No.	€	Offer €
5,0 Ah + 5,0 Ah + SFC 290 W, 216 Wh	571593 R220G	1,040.00	695.00
9,0 Ah + 9,0 Ah + SFC 290 W, 388 Wh	571594 R220G	1,240.00	799.00

*Li-Ion 22 V battery in comparison with Li-Ion 14.4 V battery.

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

REMS Mini-Press 22 V A2-22 kN and REMS Mini-Press S 22 V A2-22 kN – The real one-hand radial presses! Universal up to Ø 40 mm. Ultra-light. Ultra-small. Ultra-handy. Ultra-fast. 360° rotatable.

Li-Ion 22 V, 2.5 Ah, 54 Wh battery for approx. 390 pressings Viega Profipress DN 15 per battery charge*.



5 YEARS WARRANTY[E]



- Cordless radial press A2-22 kN with automatic circuit control, for producing pipe pressing joints Ø 6–40 mm, Ø ¼–1 ¼".
- For operating with REMS pressing tongs Mini A2-22 kN / pressing rings / pressing inserts.
- Swivelling pressing tongs seat A2 with automatic locking.

Info



A2 22 kN | LED | L-BOXX | ACC Automatic Circuit Control | REMS 22V Li-Ion Technology 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Mini-Press 22 V A2-22 kN

Drive unit 22 V, In L-Boxx system case.

	Art.-No.	€	Offer €
Basic-Pack\P Without battery, without rapid charger.	578005 R22	1,482.00	**1,195.00**
Basic-Pack Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, Rapid charger C 12/22 V, 100–240 V, 50–60 Hz, 100 W.	578014 R220G	1,875.00	**1,565.00**

Super special offer!*

You get 3 pressing tongs A2-22 kN of your choice up to 35 mm free when you buy a REMS Mini-Press 22 V A2-22 kN Basic-Pack. An additional saving of between € 387.00 and € 728.70.



	Art.-No. Super special offer	€	Offer €
Basic-Pack (578014 R220) Incl. 3 pressing tongs A2-22 kN up to 35 mm	578X09 R220G	2,331.00	**1,565.00**

Many other REMS Mini-Press 22 V A2-22 kN sets available.

Info



A2 22 kN | LED | L-BOXX | ACC Automatic Circuit Control | REMS 22V Li-Ion Technology 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Mini-Press S 22 V A2-22 kN

Drive unit 22 V, In L-Boxx system case.

	Art.-No.	€	Offer €
Basic-Pack\P Without battery, without rapid charger.	578007 R22	1,482.00	**1,195.00**
Basic-Pack Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, Rapid charger C 12/22 V, 100–240 V, 50–60 Hz, 100 W.	578016 R220G	1,875.00	**1,565.00**

Super special offer!*

You get 3 pressing tongs A2-22 kN of your choice up to 35 mm free when you buy a REMS Mini-Press S 22 V A2-22 kN Basic-Pack. An additional saving of between € 387.00 and € 728.70.



	Art.-No. Super special offer	€	Offer €
Basic-Pack (578016 R220) Incl. 3 pressing tongs A2-22 kN up to 35 mm	578X10 R220G	2,331.00	**1,565.00**

Many other REMS Mini-Press S 22 V A2-22 kN sets available.

*Ambient temperature approx. 20°C.

[E] Warranty conditions and registration for extension of the manufacturer's warranty to 5 years under www.rems.de/service.





German quality product

REMS Mini-Press 14 V A2-22 kN – Only 2.4 kg! Universal up to Ø 40 mm. Ultra-light. Ultra-small. Ultra-handy. Ultra-fast. 360° rotatable.

Info



5 YEARS WARRANTY[B]

- Cordless radial press A2-22 kN with automatic circuit control, for producing pipe pressing joints Ø 6 – 40 mm, Ø ¼ – 1 ¼".
- For operating with REMS pressing tongs Mini A2-22 kN / pressing rings / pressing inserts.
- Swivelling pressing tongs seat A2 with automatic locking.
- Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W. Safety tip switch.
- LED work light.

A2 22 kN | L-BOXX | REMS TECHNOLOGY LI-ION PLUS | ACC Automatic Circuit Control

REMS Mini-Press 14 V A2-22 kN

Drive unit 14.4 V, Battery Li-Ion 14.4 V, 2.5 Ah, 36 Wh, Rapid charger 220 – 240 V, 50 – 60 Hz, 65 W, 10.8 – 18 V, In L-Boxx system case.

	Art.-No.	€	Offer €
Basic-Pack	578013 R220G	1,630.00	**1,355.00**




Super special offer!*

You get 3 pressing tongs A2-22 kN of your choice up to 35 mm free when you buy a REMS Mini-Press 14 V A2-22 kN Basic-Pack. An additional saving of between € 387.00 and € 728.70.



	Art.-No. Super special offer	€	Offer €
Basic-Pack (578013 R220) Incl. 3 pressing tongs A2-22 kN up to 35 mm	578X04 R220G	2,086.00	**1,355.00**

Many other REMS Mini-Press 14 V A2-22 kN sets available.



Two connections for REMS Eco-Press manual radial presses and REMS A1-32 kN radial presses.

Info

German quality product

REMS Eco-Press – Universal up to Ø 40 mm. Secure crimping in seconds.







REMS Eco-Press drive unit

Manual radial press with final-lock-positioning for producing pressing joints of plastic and multi-layer composite tubes Ø 10 – 40 mm, Ø ⅜ – 1". For operating with REMS pressing tongs A1-32 kN/pressing rings. With dividable tubular arms. In skin package.
Art.-No. 574000 R € 242.00

€ 210.00

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.



REMS Power-Press A1/A1XL-32kN – Universal up to Ø 110 mm.

Info

Also for Geberit Mapress c-steel, stainless steel, copper in drinking water and heating installation up to Ø 108 mm.

- Pressing of Ø 6 – 108 mm in just one action.
- Ultra-fast, e.g. Geberit Mapress stainless steel Ø 108 mm in only 15 seconds.

A1 32 kN XL | XL-BOXX | ACC Automatic Circuit Control

REMS Power-Press A1/A1XL-32kN Basic-Pack

Electro-hydraulic radial press A1/A1XL-32kN with automatic retraction for producing pressing joints Ø 6 – 108 (110) mm, Ø ¼ – 4". For driving REMS pressing tongs A1-32 kN/ pressing rings/pressing rings XL and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat A1XL with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In XL-Boxx system case.
Art.-No. 579012 R110G

€ 2,539.00



Pressing of Ø 64 – 108 mm in a single action. Anti-vibration system.

Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. With automatic circuit control. Secure seating of adapter tongs by automatic locking. Li-Ion 22 V, 5.0 Ah, 108 Wh battery, for approx. 150 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge*.

A3 45 kN XL | XL-BOXX | ACC Automatic Circuit Control | REMS 22V Li-Ion Technology 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Akku-Press 22 V A3XL-45kN Basic-Pack Z7

Cordless radial press A3XL-45kN with automatic circuit control for making press joints XL Ø 64 – 108 mm, Ø 2½ – 4". For driving REMS pressing rings XL. Swivelling pressing ring seat A3XL with automatic locking. Electro-hydraulic drive with powerful battery motor 22 V, 380 W, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 22 V, 5.0 Ah, 108 Wh, rapid charger FC 12/22 V, 100 – 240 V, 50 – 60 Hz, 120 W. Adapter tongs Z7 A3XL-45kN. In XL-Boxx system case.
Art.-No. 579014 R220G € 3,330.00

€ 2,875.00

Universal up to Ø 54 mm. Compact. Handy. Ultra-fast. 360° rotatable.

Info

German quality product



A1 32 kN | L-BOXX | ACC Automatic Circuit Control

5 YEARS WARRANTY E)

REMS Power-Press A1-32 kN Basic-Pack

Electro-hydraulic radial press A1-32 kN with automatic retraction for producing pressing joints Ø 6 – 108 (110) mm, Ø ¼ – 4". For driving REMS pressing tongs A1-32 kN/pressing rings and other suitable makes of pressing tongs/pressing chains. Pressing tongs seat A1 with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. In L-Boxx system case.
Art.-No. 577013 R110G € 1,584.00

€ 1,325.00

REMS Power-Press SE A1-32 kN – Universal up to Ø 54 mm. Reliable pressing in seconds.

Info

German quality product



A1 32 kN | XL-BOXX

5 YEARS WARRANTY E)

REMS Power-Press SE A1-32 kN Basic-Pack

Electric radial press A1-32 kN for producing pressing joints Ø 6 – 108 (110) mm, Ø ¼ – 4". For driving REMS pressing tongs A1-32 kN/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat A1 with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, overload protection, safety tip switch. In XL-Boxx system case.
Art.-No. 572113 R110G € 1,089.00

€ 965.00

E) Warranty conditions and registration for extension of the manufacturer's warranty to 5 years under www.rems.de/service.

Universal up to Ø 54 mm. Compact. Handy. Ultra-fast. 360° rotatable.

Automatic circuit control. Anti-vibration system. Automatic locking of the pressing tongs. Li-Ion 22 V, 2.5 Ah, 54 Wh battery for approx. 200 pressings Viega Profipress DN 15 per battery charge*.

Info

- Cordless radial press A1-32kN with automatic circuit control, for making press joints Ø 6–108 (110) mm, Ø ¼–4".
- For driving REMS pressing tongs A1-32kN/pressing rings and other suitable makes of pressing tongs/pressing rings.
- Compact, with pressing tong V 15 only 35.5 cm long.
- Electro-hydraulic drive with powerful battery motor 22 V, 380 W. Safety tip switch.
- LED work light.

A1 32 kN | L-BOXX | ACC Automatic Circuit Control | REMS 22V Li-Ion Technology 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Akku-Press E 22 V A1-32kN

Drive unit 22 V, In L-Boxx system case.

	Art.-No.	€	Offer €
Basic-Pack\P Without battery, without rapid charger.	576019 R22	1,492.00	**1,239.00**
Basic-Pack Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, Rapid charger C 12/22 V, 100–240 V, 50–60 Hz, 100 W.	576017 R220G	1,885.00	**1,495.00**

only 3,3 kg

German quality product

5 YEARS WARRANTY[E]

Extra battery Li-Ion 22 V, 2.5 Ah, 54 Wh
(not supplied with Basic-Pack\P)
Art.-No. 571571 R22 € 199.00



PRESSURE MONITORING | RESULT INDICATOR





Pressure monitoring and result indicator
Electronic pressure sensor for thrust force monitoring. Pressing pressure evaluation after the pressing process. Result display with 2-color white / red LED

- Cordless radial press A1-32 kN with automatic circuit control, for making press joints Ø 6–108 (110) mm, Ø ¼–4".
- For driving REMS pressing tongs A1-32 kN/pressing rings and other suitable makes of pressing tongs/pressing rings.
- Compact, with pressing tong V 15 only 35.5 cm long.
- Electro-hydraulic drive with powerful battery motor 22 V, 380 W. Safety tip switch.
- Rapid charger with 120 W for super-fast charging.
- LED work light.

A1 32 kN | L-BOXX | ACC Automatic Circuit Control | REMS 22V Li-Ion Technology 2,5 Ah | 5,0 Ah | 9,0 Ah

REMS Akku-Press 22 V A1-32 kN

Drive unit 22 V, In L-Boxx system case.

	Art.-No.	€	Offer €
Basic-Pack\P Without battery, without rapid charger.	576002 R22	1,781.00	**1,449.00**
Basic-Pack Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, Rapid charger FC 12/22 V, 100–240 V, 50–60 Hz, 120 W.	576011 R220G	2,185.00	**1,699.00**

Extra battery Li-Ion 22 V, 2.5 Ah, 54 Wh
(not supplied with Basic-Pack\P)
Art.-No. 571571 R22 € 199.00



Universal up to Ø 54 mm. Compact. Handy. Ultra-fast. 360° rotatable.

Automatic circuit control. Anti-vibration system. Automatic locking of the pressing tongs. Li-Ion 22 V, 2.5 Ah, 54 Wh battery for approx. 200 pressings Viega Profipress DN 15 per battery charge*.

Info



only 3,3 kg

German quality product

5 YEARS WARRANTY[E]

*Ambient temperature approx. 20°C.

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.

CONNECTED


Quick-Start
Video

REMS Akku-Press 22 V Connected A1-32 kN – Universal up to Ø 54 mm. With Connected functionality via Wi-Fi radio standard and OLED display.

Selectable ACC drive mode. Pressure monitoring and result indicator. Anti-vibration system. Automatic locking of pressing tongs. Electrically monitored closing position of the tong retaining bolt. Secure crimping in seconds. Voice recordings with voice recognition. Creating reports with texts and pictures. Geolocalisation of the pressing sites. Li-Ion 22 V, 2.5 Ah, 54 Wh battery for approx. 210 pressings Viega Profipress DN 15 with one battery charge*.




Pressure monitoring ...
The pressing pressure is constantly monitored during the pressing process.



... and result indicator
If the baling pressure was within the specification, a "laughing smiley face" is shown on the OLED display.



Logs with your own company logo
All measurement/press data are logged. The user can access this data via the REMS Service Portal and create logs with text and images.



Geolocation
Automatic determination of the press locations and visualization on the map.

Voice recording with voice recognition
A voice recording can be made for each pressing. Via "Speech-to-Text" (speech recognition) a voice recording can be converted into editable text.

Blocking of use,
protection against theft

Info

5 YEARS WARRANTY[E]



- Cordless radial press A1-32 kN with selectable ACC drive mode, for making press joints Ø 6 – 108 (110) mm, Ø ¼ – 4".
- For driving REMS pressing tongs A1-32 kN/pressing rings and other suitable makes of pressing tongs/pressing rings.
- Swivelling pressing tongs seat A1.
- Electrically monitored closing position of the tong retaining bolt.
- Compact, with pressing tong V 15 only 36.3 cm long.
- Electro-hydraulic drive with powerful, brushless, maintenance free 22 V, 400 W battery motor, Safety tip switch.
- LED work lights.

only 3,3 kg
German quality product

A1 32 kN | L-BOXX | ACC Automatic Circuit Control | Brushless | REMS 22V LI-ION TECHNOLOGY 2,5 Ah 5,0 Ah 9,0 Ah

REMS Akku-Press 22 V Connected A1-32 kN

Drive unit 22 V, In L-Boxx system case.

	Art.-No.	€	Offer €
Basic-Pack\P Without battery, without rapid charger.	576005 R22	2,272.00	**1,765.00**
Basic-Pack Battery Li-Ion 22 V, 2.5 Ah, 54 Wh, Rapid charger FC 12/22 V, 100 – 240 V, 50 – 60 Hz, 120 W.	576015 R220G	2,685.00	**2,045.00**

Extra battery Li-Ion 22 V, 2.5 Ah, 54 Wh
(not supplied with Basic-Pack\P)
Art.-No. 571571 R22 € 199.00

*Ambient temperature approx. 20°C. Wi-Fi disabled. LED work lights off.
[E] Warranty conditions and registration for extension of the manufacturer's warranty to 5 years under www.rems.de/service.

REMS PressFinder – Digital. Up-to-date. Ultra-fast.

Innovative online search system for quick and easy selection of the right pressing tool for your press fitting system. More than 600 REMS pressing tools for about 500 press fitting systems available, see www.rems.de.

REMS PressFinder



German quality product

REMS pressing tongs – Proven a million times over. For all common press fitting systems.

REMS pressing tongs Mini A2-22 kN

- Suitable for all REMS radial presses A2-22 kN with pressing tool holder A2 for thrust force 22 kN.

REMS pressing tongs A1-32 kN

- Suitable for all REMS radial presses A1-32 kN with pressing tool holder A1 for thrust force 32 kN and suitable radial presses from other makes with a thrust of 32 kN.



Two connections for REMS Eco-Press manual radial presses and REMS A1-32 kN radial presses.



Info

A2 22 kN



Info

A1 32 kN

REMS pressing tongs A1-32 kN/
REMS pressing tongs Mini A2-22 kN
M, V up to 35 mm

€ 129.00

REMS pressing tongs A1-32 kN/
REMS pressing tongs Mini A2-22 kN
B, F, G, TH, U, UP, VP, VRX up to 32 mm

€ 138.00

A2 22 kN L-BOXX



Info



REMS pressing tongs Mini A2-22 kN Set

REMS pressing tongs Mini A2-22 kN, In L-Boxx system case.

	Art.-No.	€	Offer €
M 15 + 22 + 28 + 35	578057 R	764.90	599.00
VI ½ + ¾ + 1"	578922 R	693.20	519.00
TH 16 + 20 + 26	578069 R	698.90	519.00
For coolant-carrying pipes up to 48 bar Conex Bänninger >B< MaxiPro.			
BMP ¼ + ⅜ + ½ + ⅝"	578090 R	874.60	619.00
BMP ¼ + ⅜ + ½ + ⅝ + ¾ + ⅞ + 1 + 1 ⅛"	578091 R	1,600.20	1,099.00

Many other REMS pressing tongs Mini A2-22 kN + pressing tongs Mini A2-22 kN sets available.

A1 32 kN L-BOXX



Info



REMS pressing tongs A1-32 kN Set


REMS pressing tongs A1-32 kN, In L-Boxx system case.


	Art.-No.	€	Offer €
M 15 + 22 + 28 + 35	571163 R	788.60	599.00
TH 16 + 20 + 26	571169 R	727.70	519.00
For coolant-carrying pipes up to 48 bar Conex Bänninger >B< MaxiPro.			
BMP ¼ + ⅜ + ½ + ⅝"	571184 R	912.60	619.00
BMP ¼ + ⅜ + ½ + ⅝ + ¾ + ⅞ + 1 + 1 ⅛"	571185 R	1,676.20	1,099.00

Many other REMS pressing tongs A1-32 kN + pressing tongs A1-32 kN sets available.

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.




Colour coding


Colour coding





Info

German quality product

Info


REMS pressing tong Mini A2-22 kN GFFb 16 – 40


REMS pressing tong A1-32 kN GFFb 16 – 40


REMS pressing tong A1-32 kN GFFo 50 – 75

REMS pressing tongs A1-32 kN / pressing tong Mini A2-22 kN GFF for Geberit FlowFit

- Highly durable pressing tongs made of tenacious, specially hardened special steel.
- The pressing contour is system-specific and matched to the Geberit FlowFit pressfitting system for perfectly system-compliant, safe pressing.
- Colour coding for quick and easy selection of the right pressing tongs for the corresponding pressfitting.

A2 22 kN

REMS pressing tong Mini A2-22 kN GFFb 16 – 40

- Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (Patent EP 2 347 862).
- Suitable for all REMS radial presses A2-22 kN with pressing tool holder A2 for thrust force 22 kN. Read and observe the instructions for use and assembly instructions of the system provider/manufacturer.

For Ø 16 mm, 20 mm, 25 mm, 32 mm and 40 mm.
Art.-No. 578670 R

€ 349.00

A1 32 kN

REMS pressing tongs A1-32 kN GFFb 16 – 40* and GFFo 50 – 75

- Suitable for all REMS radial presses A1-32 kN with pressing tool holder A1 for thrust force 32 kN. REMS pressing tong A1-32 kN GFFb 16 – 40* has an optional connection for manual drive through the radial press REMS Eco-Press. Read and observe the instructions for use and assembly instructions of the system provider/manufacturer.

REMS pressing tong A1-32 kN GFFb 16 – 40*

For Ø 16 mm, 20 mm, 25 mm, 32 mm and 40 mm.
Art.-No. 571480 R

€ 349.00

REMS pressing tong A1-32 kN GFFo 50 – 75

For Ø 50 mm, 63 mm, 75 mm.
Art.-No. 571485 R

€ 549.00



Info

German quality product

REMS pressing rings for large dimensions up to Ø 54 mm. Fit. Press. Finished.



A1 32 kN

REMS pressing rings (PR-3S) with 3 swivellable pressing formers mounted on a jointed ring for large dimension complex pressings. Optimum pressing by radially controlled movement of the pressing formers.


REMS pressing ring M 42 (PR-3S)	Art.-No. 572706 R	€ 696.00
REMS pressing ring M 54 (PR-3S)	Art.-No. 572708 R	€ 696.00
Intermediate tongs Z2 A1-32 kN for driving REMS pressing rings (PR-3S) 42–54 mm	Art.-No. 572795 R	€ 155.00
System case L-Boxx with inlay	Art.-No. 572873 R	€ 149.00
Pressing ring set complete	**Art.-No. 572062 R**	**€ 1,696.00**

€ 1,459.00



REMS pressing rings (PR-2B S) – Multi-angle pressing rings, ideal for areas with difficult access.

e.g. opened walls, exposed pipes, shafts





Info

German quality product

Pressing contour	Construction type	Art.-No.	€
M 12	PR-2B S	574736 R	131.20
M 15	PR-2B S	574738 R	131.20
M 18	PR-2B S	574740 R	131.20
M 22	PR-2B S	574742 R	131.20
M 28	PR-2B S	574744 R	131.20
M 35	PR-2B S	574746 R	131.20
F 16*	PR-2B S	574728 R	150.80
F 20*	PR-2B S	574730 R	150.80
F 26*	PR-2B S	574732 R	163.20
F 32*	PR-2B S	574734 R	163.20
TH 10*	PR-2B S	574772 R	158.20
TH 11,6*	PR-2B S	574774 R	158.20
TH 12*	PR-2B S	574776 R	158.20
TH 14*	PR-2B S	574778 R	158.20
TH 15*	PR-2B S	574780 R	158.20
TH 16*	PR-2B S	574782 R	158.20
TH 17*	PR-2B S	574784 R	158.20
TH 18*	PR-2B S	574786 R	158.20
TH 20*	PR-2B S	574788 R	158.20
TH 22*	PR-2B S	574790 R	158.20
TH 25*	PR-2B S	574792 R	158.20
TH 26*	PR-2B S	574794 R	158.20
TH 28	PR-2B S	574796 R	158.20
TH 32	PR-2B S	574798 R	158.20

Pressing contour	Construction type	Art.-No.	€
U 14*	PR-2B S	574858 R	148.20
U 16*	PR-2B S	574860 R	148.20
U 18*	PR-2B S	574870 R	148.20
U 20*	PR-2B S	574862 R	148.20
U 25*	PR-2B S	574864 R	148.20
U 26/C26*	PR-2B S	574866 R	173.20
U 32	PR-2B S	574868 R	173.20
V 12	PR-2B S	574748 R	131.20
V 14	PR-2B S	574750 R	131.20
V 15	PR-2B S	574752 R	131.20
V 16	PR-2B S	574754 R	131.20
V 18	PR-2B S	574756 R	131.20
V 22	PR-2B S	574758 R	131.20
V 28	PR-2B S	574760 R	131.20
V 35	PR-2B S	574762 R	131.20
VI ½"	PR-2B S	574850 R	156.60
VI ¾"	PR-2B S	574852 R	156.60
VI 1"	PR-2B S	574854 R	156.60
For coolant-carrying pipes up to 48 bar Conex Bänninger >B< MaxiPro.			
BMP ¼"	PR-2B S	574810 R	156.60
BMP 8 / BMP 5/16"	PR-2B S	574712 R	156.60
BMP ⅜"	PR-2B S	574812 R	156.60
BMP ½"	PR-2B S	574814 R	156.60
BMP ⅝"	PR-2B S	574816 R	156.60
BMP ¾"	PR-2B S	574818 R	156.60
BMP ⅞"	PR-2B S	574820 R	156.60
BMP 1"	PR-2B S	574822 R	156.60
BMP 1 ⅛"	PR-2B S	574824 R	156.60



A2 22 kN

REMS Mini adapter tong Z8 A2-22 kN

for driving REMS pressing rings (PR-2B S).
Suitable for all REMS radial presses A2-22 kN.
Art.-No. 574700 R

€ 153.00



A1 32 kN

REMS adapter tong Z8 A1-32 kN

for driving REMS pressing rings (PR-2B S). Suitable for all REMS radial presses A1-32 kN and suitable radial presses from other makes with a thrust of 32 kN.
Art.-No. 574702 R

€ 153.00



REMS pressing rings (PR-2B S) Set Mini Z8 A2-22 kN

REMS pressing rings (PR-2B S), Mini adapter tong Z8 A2-22 kN, in sturdy steel case.



REMS pressing rings (PR-2B S) Set Z8 A1-32 kN

REMS pressing rings (PR-2B S), adapter tong Z8 A1-32 kN, in sturdy steel case.

	Art.-No.	€	Offer €
M 15+22+28 S Mini Z8 A2-22 kN	574618 R	649.60	**549.00**
VI ½+¾+1" S Mini Z8 A2-22 kN	574641 R	725.80	**549.00**
TH 16+20+26 S Mini Z8 A2-22 kN	574622 R	730.60	**549.00**

Many other REMS pressing rings (PR-2B S) sets available.

	Art.-No.	€	Offer €
M 15+22+28 S Z8 A1-32 kN	574619 R	649.60	**549.00**
VI ½+¾+1" S Z8 A1-32 kN	574640 R	725.80	**549.00**
TH 16+20+26 S Z8 A1-32 kN	574623 R	730.60	**549.00**

Many other REMS pressing rings (PR-2B S) sets available.

* Can also be driven by the REMS Eco-Press manual radial press using the Z8 A1-32 kN adapter tongs.

€ excl. VAT. Promotion until 31st December 2026. We reserve the right to increase prices.



Info

German quality product

REMS XL pressing rings up to Ø 108 mm

Heavy duty XL pressing rings XL and Z6 A1XL-32kN or Z7 A3XL-45kN adapter tongs made of forged and specially hardened special steel. The pressing contours of the REMS XL pressing rings are system-specific and correspond to the pressing contours of the respective press fitting systems. Perfect system-conformant, reliable pressing as a result.

Pressing up to Ø 108 mm in just one action.

Pressing contour	Construction type	Art.-No.	€
M 66,7[3) 4)]	XL PR-3S	579107 R	**1,213.00**
M 76,1[3) 4)]	XL PR-3S	579101 R	**1,213.00**
M 88,9 G[3) 4)]	XL PR-3S	579110 R	**1,416.00**
M 108,0 G[3) 4)]	XL PR-3S	579111 R	**1,416.00**
VMPz 2 ½" [4)]	XL PR-3B	579112 R	**635.00**
VMPz 3" [4)]	XL PR-3B	579113 R	**635.00**
VMPz 4" [4)]	XL PR-3B	579114 R	**678.00**
XP 64,0[3) 4)]	XL PR-3S	579100 R	**1,107.00**
XP 66,7[3) 4)]	XL PR-3S	579108 R	**1,213.00**
XP 108,0[3) 4)]	XL PR-3S	579109 R	**1,416.00**

[3)] The Z6 A1XL-32kN adapter tong is required. Driven by REMS Power-Press A1/A1XL-32kN.
[4)] The Z7 A3XL-45kN adapter tong is required. Driven by REMS Akku-Press 22 V A3XL-45kN.



A1 32 kN XL

Adapter tong Z6 A1XL-32kN

For driving the REMS pressing rings 64,0 – 108,0 XL (PR-3S), 2½ – 4" XL (PR-3S) with REMS Power-Press A1/A1XL-32kN.
Art.-No. 579120 R

€ **397.00**

A3 45 kN XL

Adapter tong Z7 A3XL-45kN

For driving the REMS pressing rings 64,0 – 108,0 XL (PR-3S), 2½ – 4" XL (PR-3S), 2½ – 4" XL (PR-3B) with REMS Akku-Press 22 V A3XL-45kN.
Art.-No. 579123 R

€ **417.00**




Info


REMS pressing rings XL Set VMPz 2 ½ + 3 + 4"

REMS pressing rings XL (PR-3B) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Adapter tongs Z7 A3XL-45 kN required. Driven by REMS Akku-Press 22 V A3XL-45 kN. In L-Boxx system case.
Art.-No. 571181 R

€ **2,097.00**







Cropping tongs with 1 pair of reversible cutting inserts for steel, stainless steel, M 6 – M 12, up to strength class 4.8 (400 N/mm²).



German quality product

Patent EP 1 952 948
Patent EP 2 347 862



German quality product

REMS cropping tongs – Cutting threaded bars. Ultra-fast.

Info

A2 22 kN

Suitable for all REMS radial presses A2-22 kN with pressing tool holder A2 for thrust force 22 kN.

REMS Mini cropping tongs A2-22 kN

M 6 A2-22 kN Art.-No. 578620
M 8 A2-22 kN Art.-No. 578621
M 10 A2-22 kN Art.-No. 578622
instead of € 252.80 now only

€ **215.00**

A1 32 kN

Suitable for all REMS radial presses A1-32 kN with pressing tool holder A1 for thrust force 32 kN and suitable radial presses from other makes with a thrust of 32 kN.

REMS cropping tongs A1-32 kN

M 6 A1-32 kN* Art.-No. 571890
M 8 A1-32 kN* Art.-No. 571895
M 10 A1-32 kN Art.-No. 571865
M 12 A1-32 kN Art.-No. 571870
instead of € 252.80 now only

€ **215.00**

All cropping tongs marked by * have another connection for manual drive by the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

The innovative online search system for pressing tools!

NEW

REMS PressFinder


REMS PressFinder

With the innovative REMS PressFinder online search system, you can find find the right REMS pressing tool for the press fitting system you want/are looking for easily and within seconds.

Or reliably find the press fitting systems which you can press system-conformant with selected REMS pressing tongs, REMS Mini pressing tongs or a REMS pressing ring.

The user can currently find the right result from more than 600 different REMS pressing tools and about 500 different press fitting systems.

REMS PressFinder! Digital! Up-to-date! Ultra-fast!

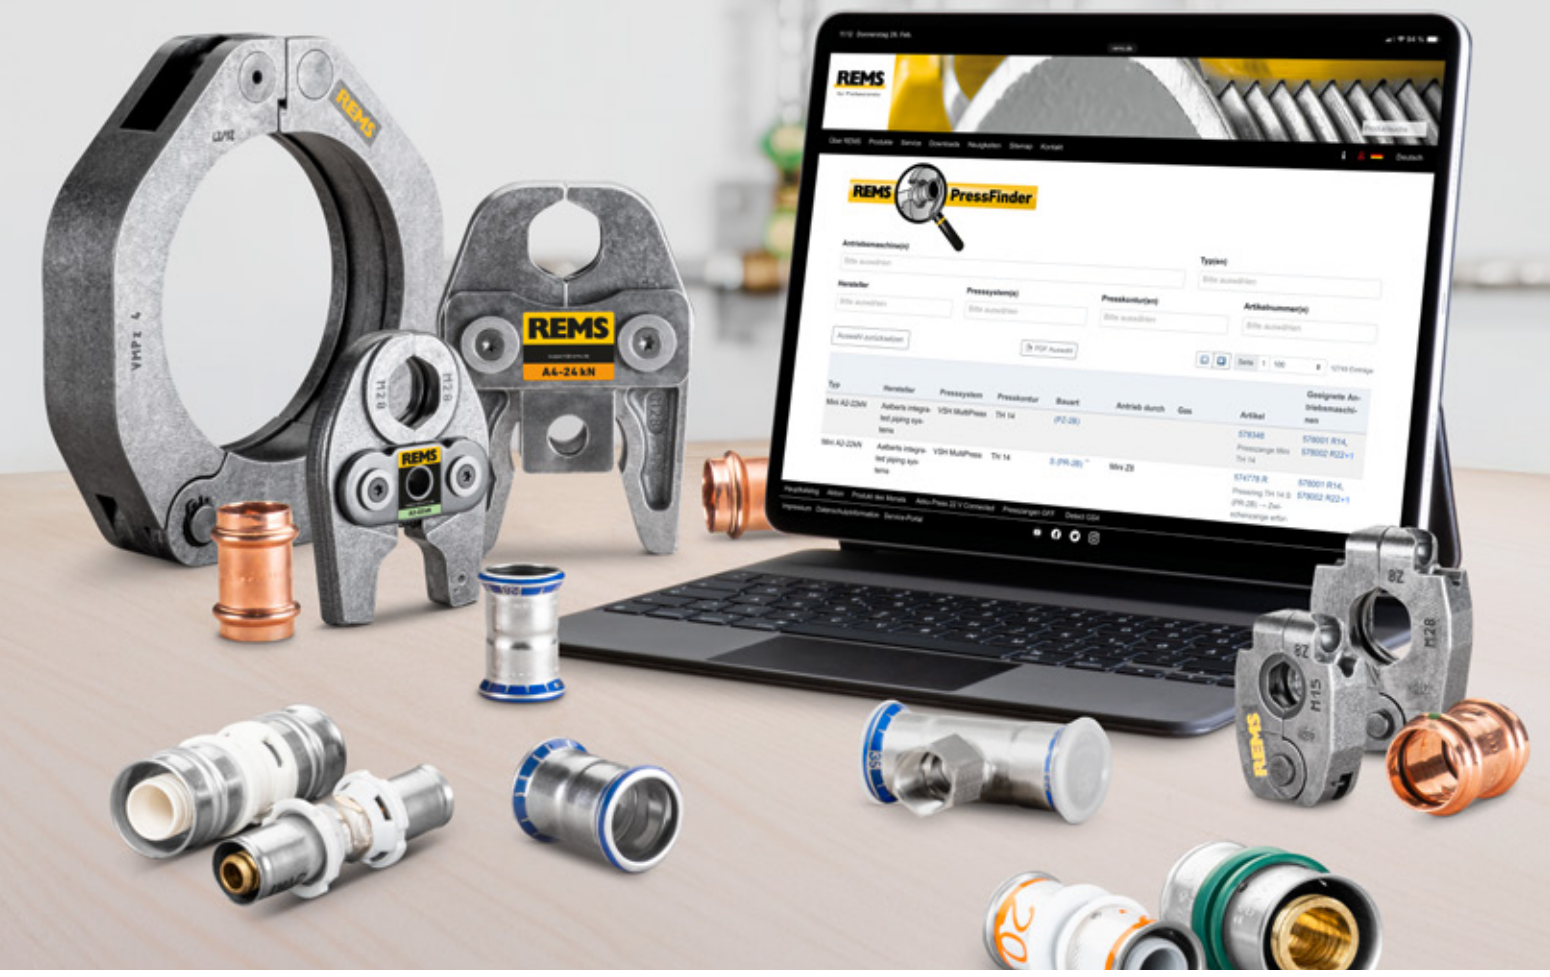

REMS in Ireland
Tel.: 01 8700 008 · Email: IRL@rems.de

www.rems.de @remstools

Representative – Ireland, North of the Liffey:
Adrian McCann
Mobile: +44 (0)7570 395528
Email: adrian.mccann@rems.de

Representative – Ireland, South of the Liffey:
Jonathan Finlay
Mobile: 087 920 4068
Email: jonathan.finlay@rems.de

MA072026094175IRL00 · Subject to alterations and errors. © Copyright 2026 by REMS GmbH & Co KG, Waiblingen. € excl. VAT.
Promotion until 31st December 2026. We reserve the right to increase prices. Sale through specialist dealers.

4 039976 273473