High quality universal diamond core drilling crowns. Laser welded. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other

Ø 32 – 200 mm

REMS universal diamond core drilling crowns LS – laser welded. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1% female. Drilling depth 420 mm.

Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1% male. Adapter for using REMS Universal diamond core drilling crowns LS in drive machines having other connecting threads, as accessory.

Suck off dusts that occur during dry drilling with REMS Pull M safety vacuum cleaner, certified for extracting health hazardous dusts of dust class M (page 304).










Supply format

REMS Universal diamond core drilling crown. Laser welded! High temperature-resistant! Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1½ female. Drilling depth 420 mm. In a carton.

Ø × drilling depth × connection	Number of segments	ArtNo.	
UDKB LS 32 × 420 × UNC 11/4	1	181410	
UDKB LS 42 × 420 × UNC 11/4	4	181415	
UDKB LS 52 × 420 × UNC 11/4	5	181420	
UDKB LS 62 × 420 × UNC 11/4	6	181425	
UDKB LS 72 × 420 × UNC 11/4	6	181430	
UDKB LS 82 × 420 × UNC 11/4	7	181435	
UDKB LS 92 × 420 × UNC 11/4	8	181440	
UDKB LS 102 × 420 × UNC 11/4	9	181445	
UDKB LS 112 × 420 × UNC 11/4	9	181450	
UDKB LS 122 × 420 × UNC 11/4	10	181455	
UDKB LS 125 × 420 × UNC 11/4	10	181457	
UDKB LS 127 × 420 × UNC 11/4	10	181459	
UDKB LS 132 × 420 × UNC 11/4	10	181460	
UDKB LS 152 × 420 × UNC 11/4	11	181465	
UDKB LS 162 × 420 × UNC 11/4	12	181470	
UDKB LS 182 × 420 × UNC 11/4	13	181475	
UDKB LS 200 × 420 × UNC 11/4	14	181480	

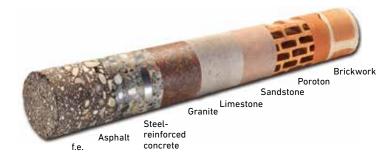



Accessories

Description	ArtNo.	
Light loosening ring, for light loosening of the diamond core crown	180015	
Drilling crown extension 200 mm	180155	
Adapter UNC 1¼ male to G ½ male	180052	
Adapter UNC 1¼ male to G ½ female	180056	
Adapter UNC 1¼ male for Hilti BI	180053	
Adapter UNC 1¼ male for Hilti BU	180054	
Sharpening stone for diamond core drilling crowns	079012	
Single open ended wrench size 41 for UDKB	079003	

Additional adapters for using REMS Universal diamond core drilling crowns LS in drive machines of other makes, on request.

