

for all common pressfitting systems

Select REMS pressing tongs Mini/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the REMS pressing tongs Mini/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Can be driven by all REMS radial presses 22 kN. Adapter tongs (page 195) required for driving REMS pressing rings. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press (page 199) using the adapter tong Z8.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs Mini (PZ-2B)

REMS Mini pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

REMS Mini ACz, Fz, HEz, RFz, RFlz pressing tongs with teeth prevent formation of burr on the pressfitting (**Patent EP 2 027 971**).

REMS pressing tongs Mini GFF

REMS pressing tongs Mini GFFb, especially for the Geberit FlowFit press fitting system. Only one pressing tongs for sizes Ø 16, 20, 25, 32 and 40 mm. With colour coding for fast, easy selection of the suitable pressing tongs for the appropriate press fitting.

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 195.

Traceability according to EN 1775:2007

REMS pressing tongs Mini with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.



German Quality Product



REMS Mini pressing tongs (PZ-2B)



REMS pressing ring S (PR-2B), continuously swivellable



REMS pressing tongs Mini GFF

Confirmation of suitability

See page 259.

Hold-Harmless and Indemnification Agreement

See page 260.





Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs Mini V: "V" imprint on pressed fitting for traceability according to EN 1775:2007

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
A				
Aalberts integrated piping systems VSH MultiPress	U 14		578372	349,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 14 S (PR-2B)**	Mini Z8	574858 R	253,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
Aalberts integrated piping systems VSH MultiPress Gas	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 16 S (PR-2B)	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)	Mini Z8	574864 R	253,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 16 S (PR-2B)	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)	Mini Z8	574788 R	253,00
Aalberts integrated piping systems VSH SudoPress Carbon	V 12		578324	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Aalberts integrated piping systems VSH SudoPress Copper	V 12		578324	293,00
	V 14		578326	293,00
	VG 14		578338	293,00
	V 15		578328	293,00
	V 16		578330	293,00
	VG 16		578340	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
Aalberts integrated piping systems VSH SudoPress Stainless	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Aalberts integrated piping systems VSH XPress Carbon	M 12		578310	293,00
	M 15		578312	293,00
	M 18 ^U		578314	293,00
	M 22		578316	293,00
	M 28 ^U		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Aalberts integrated piping systems VSH XPress Copper	M 12		578310	293,00
	M 15		578312	293,00
	M 18 ^U		578314	293,00
	M 22		578316	293,00
	M 28 ^U		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Aalberts integrated piping systems VSH XPress Copper Gas	M 15		578312	293,00
	M 18 ^U		578314	293,00
	M 22		578316	293,00
	M 28 ^U		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Aalberts integrated piping systems VSH XPress Stainless	M 15		578312	293,00
	M 18 ^U		578314	293,00
	M 22		578316	293,00
	M 28 ^U		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
AC-FIX PRESS (Global Piping Systems)	H 12		578396	318,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	Rfz 12		578490	368,00
	Rfz 16		578492	368,00
	Rfz 20		578494	368,00
	Rfz 25		578496	368,00
	Rfz 32		578498	368,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	VX 16		578552	408,00
AC-FIX PRESS DUO (Global Piping Systems)	VX 20		578554	408,00
	Rfz 16		578492	368,00
	Rfz 20		578494	368,00
	Rfz 25		578496	368,00
	Rfz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16		578400	318,00	AIRBEL PRESSCLIM	M 15		578312	293,00
	H 18		578404	318,00		M 18		578314	293,00
	H 20		578406	318,00		M 22		578316	293,00
	H 25		578408	318,00		M 28		578318	293,00
	H 32		578412	318,00		M 35		578390	352,00
	RFz 16		578492	368,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	RFz 20		578494	368,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	RFz 25		578496	368,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	RFz 32		578498	368,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	U 16		578374	331,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	U 18		578376	331,00	AIRBEL SERTINOX	M 15		578312	293,00
	U 20		578378	331,00		M 18		578314	293,00
	U 25		578380	331,00		M 22		578316	293,00
	U 32		578382	387,00		M 28		578318	293,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		M 35		578390	352,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
						M 35 S (PR-2B)	Mini Z8	574746 R	276,00
ACOME MT	ACz 12		578608	368,00	ALB Sistema Multicapa para calefacción y sanitario	TH 16		578352 R	354,00
	ACz 16		578610	368,00		TH 18		578356	354,00
	ACz 20		578612	368,00		TH 20		578358 R	354,00
	ACz 25		578614	368,00		TH 26		578362 R	354,00
AHLSELL A-press elförzinkad M	M 12		578310	293,00		TH 32		578364	354,00
	M 15		578312	293,00		TH 40		578624	469,00
	M 18		578314	293,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 22		578316	293,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	M 28		578318	293,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 35		578390	352,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		H 16		578400	318,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		H 18		578404	318,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		H 20		578406	318,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		H 26		578410	318,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		H 32		578412	318,00
AHLSELL A-press elförzinkad V	V 12		578324	293,00	ALB Sistema Multicapa para gas	U 16		578374	331,00
	V 15		578328	293,00		U 18		578376	331,00
	V 18		578332	293,00		U 20		578378	331,00
	V 22		578334	293,00		U 26 ⁷⁾		578392	387,00
	V 28		578336	293,00		U 32		578382	387,00
	V 35		578604	352,00		U 40		578386	472,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00		U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00		U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00	ALB Sistema Multicapa para gas	TH 16		578352 R	354,00
AHLSELL A-press koppar M	M 12		578310	293,00		TH 20		578358 R	354,00
	M 15		578312	293,00		TH 26		578362 R	354,00
	M 18		578314	293,00		TH 32		578364	354,00
	M 22		578316	293,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 28		578318	293,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 35		578390	352,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		H 16		578400	318,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		H 20		578406	318,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		H 26		578410	318,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		H 32		578412	318,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00	ALTECH Altech	U 16		578374	331,00
AHLSELL A-press koppar V	V 12		578324	293,00		U 20		578378	331,00
	V 15		578328	293,00		U 26 ⁷⁾		578392	387,00
	V 18		578332	293,00		U 32		578382	387,00
	V 22		578334	293,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	V 28		578336	293,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	V 35		578604	352,00		U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00		RFz 12		578490	368,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00		RFz 16		578492	368,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00		RFz 20		578494	368,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00		RFz 25		578496	368,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00	APE MULTYGAS Serie AP Gas	TH 16		578352 R	354,00
AHLSELL A-press rostfritt	M 15		578312	293,00		TH 20		578358 R	354,00
	M 18		578314	293,00		TH 26		578362 R	354,00
	M 22		578316	293,00		TH 32		578364	354,00
	M 28		578318	293,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 35		578390	352,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00					
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00					
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
APE Serie AP	B 16		578468	385,00	ARKA DURSystem	H 16		578400	318,00
	B 20		578472	385,00		H 20		578406	318,00
	B 26		578474	426,00		H 25		578408	318,00
	B 32		578476	426,00		H 26		578410	318,00
	H 16		578400	318,00		H 32		578412	318,00
	H 20		578406	318,00		TH 16		578352 R	354,00
	H 26		578410	318,00		TH 20		578358 R	354,00
	H 32		578412	318,00		TH 25		578360	354,00
	TH 16		578352 R	354,00		TH 26		578362 R	354,00
	TH 18		578356	354,00		TH 32		578364	354,00
	TH 20		578358 R	354,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 26		578362 R	354,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 32		578364	354,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		U 16		578374	331,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		U 20		578378	331,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 16		578374	331,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 20		578378	331,00	ARKA System Calido	M 15		578312	293,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		M 18		578314	293,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		M 22		578316	293,00
APE Serie APL	H 16		578400	318,00		M 28		578318	293,00
	H 18		578404	318,00		M 35		578390	352,00
	H 20		578406	318,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	H 25		578408	318,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	H 26		578410	318,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	H 32		578412	318,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	TH 16		578352 R	354,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	TH 18		578356	354,00		V 15		578328	293,00
	TH 20		578358 R	354,00		V 18		578332	293,00
	TH 25		578360	354,00		V 22		578334	293,00
	TH 26		578362 R	354,00		V 28		578336	293,00
	TH 32		578364	354,00		V 35		578604	352,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00		V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00	ARKA System Calido Gas	M 15		578312	293,00
	U 16		578374	331,00		M 18		578314	293,00
	U 18		578376	331,00		M 22		578316	293,00
	U 20		578378	331,00		M 28		578318	293,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
AQUATECHNIK Press-fitting metal	H 16		578400	318,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	H 20		578406	318,00		V 15		578328	293,00
	H 26		578410	318,00		V 18		578332	293,00
	H 32		578412	318,00		V 22		578334	293,00
	TH 16		578352 R	354,00		V 28		578336	293,00
	TH 20		578358 R	354,00		V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	TH 26		578362 R	354,00		V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	TH 32		578364	354,00		V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00	Ascht NIR	M 15		578312	293,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		M 18		578314	293,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		M 22		578316	293,00
	U 16		578374	331,00		M 28		578318	293,00
	U 20		578378	331,00		M 35		578390	352,00
	U 26 ⁷⁾		578392	387,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	U 32		578382	387,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00	ASSOTHERM IPC-RAC Carbon Steel	M 15		578312	293,00
						M 18		578314	293,00
						M 22		578316	293,00
						M 28		578318	293,00
						M 35		578390	352,00
						M 15 S (PR-2B)	Mini Z8	574738 R	253,00
						M 18 S (PR-2B)	Mini Z8	574740 R	253,00
						M 22 S (PR-2B)	Mini Z8	574742 R	253,00
						M 28 S (PR-2B)	Mini Z8	574744 R	253,00
						M 35 S (PR-2B)	Mini Z8	574746 R	276,00
AQUATECHNIK Universal	B 16		578468	385,00		M 15		578312	293,00
	B 20		578472	385,00		M 18		578314	293,00
	B 26		578474	426,00		M 22		578316	293,00
	B 32		578476	426,00		M 28		578318	293,00
	F 16		578456	337,00		M 35		578390	352,00
	F 20		578460	337,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	F 26		578462	365,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	F 32		578464	365,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00	ASSOTHERM IPI-RAX Inox	M 15		578312	293,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	276,00		M 18		578314	293,00
	H 16		578400	318,00		M 22		578316	293,00
	H 20		578406	318,00		M 28		578318	293,00
	H 26		578410	318,00		M 35		578390	352,00
	H 32		578412	318,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	TH 16		578352 R	354,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	TH 20		578358 R	354,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	TH 26		578362 R	354,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	TH 32		578364	354,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00	ASSOTHERM IPI-RAX Inox Gas	M 15		578312	293,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		M 18		578314	293,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		M 22		578316	293,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		M 28		578318	293,00
	U 16		578374	331,00		M 35		578390	352,00
	U 20		578378	331,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	U 26 ⁷⁾		578392	387,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	U 32		578382	387,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00					
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00					

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
ASSOTHERM IPM-Multistrato	H 16		578400	318,00	AYOR FIXOCONNECT Press	H 12		578396	318,00
	H 20		578406	318,00		H 16		578400	318,00
	H 26		578410	318,00		H 20		578406	318,00
	H 32		578412	318,00		H 25		578408	318,00
	TH 16		578352 R	354,00		RFz 12		578490	368,00
	TH 20		578358 R	354,00		RFz 16		578492	368,00
	TH 26		578362 R	354,00		RFz 20		578494	368,00
	TH 32		578364	354,00		RFz 25		578496	368,00
	THL 32		578368	354,00		U 16		578374	331,00
	TH 40		578624	469,00		U 20		578378	331,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		U 25		578380	331,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00	AYOR FIXOMULTIX	H 16		578400	318,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		H 20		578406	318,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		H 26		578410	318,00
	U 16		578374	331,00		H 32		578412	318,00
	U 20		578378	331,00		TH 16		578352 R	354,00
	U 26 ¹⁾		578392	387,00		TH 20		578358 R	354,00
	U 32		578382	387,00		TH 26		578362 R	354,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		TH 32		578364	354,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
ASSOTHERM IPR-RRA Copper	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 15		578312	293,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	M 18		578314	293,00		U 16		578374	331,00
	M 22		578316	293,00		U 20		578378	331,00
	M 28		578318	293,00		U 26 ¹⁾		578392	387,00
	M 35		578390	352,00		U 32		578382	387,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		U 40		578386	472,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00	AYOR SOMATHERM FOR YOU -1	H 16		578400	318,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		H 20		578406	318,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		H 26		578410	318,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		TH 16		578352 R	354,00
ASSOTHERM IPR-RRA Copper Gas	M 15		578312	293,00		TH 20		578358 R	354,00
	M 18		578314	293,00		TH 26		578362 R	354,00
	M 22		578316	293,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 28		578318	293,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 35		578390	352,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		U 16		578374	331,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		U 20		578378	331,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		U 26 ¹⁾		578392	387,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00	AYOR SOMATHERM FOR YOU -2	H 12		578396	318,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		H 16		578400	318,00
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ¾"		578534	402,00		H 20		578406	318,00
	US ½"		578536	402,00		H 25		578408	318,00
	US ¾"		578538	402,00		RFz 12		578490	368,00
	US 1"		578540	402,00		RFz 16		578492	368,00
						RFz 20		578494	368,00
ATUSA ITALIA INSTALPRESS CARBON STEEL PRESS FITTINGS	M 15		578312	293,00		RFz 25		578496	368,00
	M 18		578314	293,00		U 16		578374	331,00
	M 22		578316	293,00		U 20		578378	331,00
	M 28		578318	293,00		U 25		578380	331,00
	M 35		578390	352,00	B				
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00	Bampi BALPEX serie LP	TH 16		578352 R	354,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		TH 18		578356	354,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		TH 20		578358 R	354,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		TH 26		578362 R	354,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		TH 32		578364	354,00
ATUSA ITALIA INSTALPRESS STAINLESS STEEL PRESS FITTINGS	M 15		578312	293,00		TH 40		578624	469,00
	M 18		578314	293,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 22		578316	293,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	M 28		578318	293,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 35		578390	352,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		U 16		578374	331,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		U 18		578376	331,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		U 20		578378	331,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		U 26 ¹⁾		578392	387,00
AUSTEC PEX-B, PEX-AL-PEX (AUS)	TH 16		578352 R	354,00		U 32		578382	387,00
	TH 20		578358 R	354,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	TH 25		578360	354,00		U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	TH 32		578364	354,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 16		578374	331,00		U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 20		578378	331,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 25		578380	331,00	Bampi BALPEX serie MP	TH 16		578352 R	354,00
	U 32		578382	387,00		TH 18		578356	354,00
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16		578352 R	354,00		TH 20		578358 R	354,00
	TH 20		578358 R	354,00		TH 26		578362 R	354,00
	TH 25		578360	354,00		TH 32		578364	354,00
	TH 32		578364	354,00		TH 40		578624	469,00
	U 16		578374	331,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	U 20		578378	331,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	U 25		578380	331,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	U 32		578382	387,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
						TH 32 S (PR-2B)	Mini Z8	574798 R	276,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Bampi BALPEX Gas	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
BARBI EASYPRESS (Industrial Blansol)	H 12		578396	318,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	Rfz 12		578490	368,00
	Rfz 16		578492	368,00
	Rfz 20		578494	368,00
	Rfz 25		578496	368,00
	Rfz 32		578498	368,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
BARBI MULTIPLEX (Industrial Blansol)	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	Rfz 16		578492	368,00
	Rfz 18		578638	368,00
	Rfz 20		578494	368,00
	Rfz 25		578496	368,00
	Rfz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	276,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
BEGETUBE/ IVAR	B 14		578466	385,00
	B 16		578468	385,00
	B 18		578470	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
Béné inox Série 41	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Brass Form Master-Al-Pex	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
Brass & Fittings PRESSMAN MultiPress	Rfz 16		578492	368,00
	Rfz 18		578638	368,00
	ACz 20		578612	368,00
	Rfz 25		578496	368,00
	Rfz 32		578498	368,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Brass & Fittings PRESSMAN RetiPress	Rfz 16		578492	368,00
	Rfz 18		578638	368,00
	ACz 20		578612	368,00
	Rfz 25		578496	368,00
	Rfz 32		578498	368,00
BRASSTECH MULTItermoSAN Brasspress	B 16		578468	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
	F 16		578456	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
C	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
Cello Products -Press	VUS ½" (OD 15,9 mm)		578566	354,00
	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1¼" (OD 34,9 mm)		578606	354,00
CGR DYNAFLU multicouche	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
CGR DYNAFLU PER	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	H 12		578396	318,00
	H 16		578400	318,00
CHIALI CHIALIPEX	H 20		578406	318,00
	H 25		578408	318,00
	Rfz 12		578490	368,00
	Rfz 16		578492	368,00
	Rfz 20		578494	368,00
	Rfz 25		578496	368,00
Climatrix Climatrix Rhinopex	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	H 16		578400	318,00
	H 20		578406	318,00
	U 16		578374	331,00
	U 20		578378	331,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
Climatrix	TH 11,6		578344	354,00
Variotherm	TH 16		578352 R	354,00
System TH	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
ClouSet	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
Comap	RFz 12		578490	368,00
PEX Press	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
Comap	TH 14		578348	354,00
Multiskin	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	THL 32		578368	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 32		578382	387,00
	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
Comap	TH 16		578352 R	354,00
Multiskin Gas	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	THL 32		578368	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 32		578382	387,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
COMISA	TH 14		578348	354,00
Press System	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	B 14		578466	385,00
	B 16		578468	385,00
	B 18		578470	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
COMISA	TH 16		578352 R	354,00
Press System Gas	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
CONEL	M 15		578312	293,00
CONNECT INOX	M 18		578314	293,00
	M 22		578316	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
CONEL	F 16		578456	337,00
CONNECT	F 20		578460	337,00
MULTI	F 26		578462	365,00
	F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	VP 16		578482	352,00
	VP 20		578484	352,00
	VP 32		578488	389,00
CONEL	F 16		578456	337,00
CONNECT	F 20		578460	337,00
MV2	F 26		578462	365,00
	F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	276,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
Conex Bänninger	M 15		578312	293,00
<A> Press Inox	M 18		578314	293,00
(304)	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Conex Bänninger	M 15		578312	293,00
<A> Press Inox	M 18		578314	293,00
(316L)	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Conex Bänninger >B< Flex	F 16		578456	337,00
	F 18		578458	337,00
	F 20		578460	337,00
	F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	RFz 16		578492	368,00
	RFz 18		578638	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
Conex Bänninger >B< Flex Gas	F 16		578456	337,00
	F 18		578458	337,00
	F 20		578460	337,00
	F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	RFz 16		578492	368,00
	RFz 18		578638	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
Conex Bänninger >B< MaxiPro	BMP ¼"		578700	350,00
	BMP ⅜"		578702	350,00
	BMP ½"		578704	350,00
	BMP ⅝"		578706	350,00
	BMP ¾"		578708	350,00
	BMP ⅞"		578710	350,00
	BMP 1"		578712	350,00
	BMP 1½"		578714	350,00
Conex Bänninger >B< Press EN ⁽⁴⁾	V 12		578324	293,00
	V 14		578326	293,00
	V 15		578328	293,00
	V 16		578330	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Conex Bänninger >B< Press Carbon EN ⁽⁴⁾	M 15		578312	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Conex Bänninger >B< Press Gas EN ⁽⁴⁾	V 12		578324	293,00
	V 14		578326	293,00
	V 15		578328	293,00
	V 16		578330	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Conex Bänninger >B< Press Inox EN ⁽⁴⁾	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Conex Bänninger >B< Press Solar	V 12		578324	293,00
	V 14		578326	293,00
	V 15		578328	293,00
	V 16		578330	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
D				
Debrunner Acifer d-a Presssystem C-Stahl	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
DUOPIPE SYSTEMS DUOFIL MKSYSTEM	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
DW Verbundrohr multitubo systems	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
E				
EBRILLE Isomonflex	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁽⁷⁾		578392	387,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	H 26		578410	318,00
	TH 26		578362 R	354,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
EBRILLE Moniflex	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁽⁷⁾		578392	387,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	H 26		578410	318,00
	TH 26		578362 R	354,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapler tongs	Art.-No.	лв.
EFFEBI	M 15		578312	293,00
EFFEBI-PRESS	M 18		578314	293,00
Aisi316	M 22		578316	293,00
System M Profile ¹⁾	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
EFFEBI	V 12		578324	293,00
EFFEBI-PRESS	V 15		578328	293,00
Aisi316	V 18		578332	293,00
System V Profile	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
EFFEBI	M 12		578310	293,00
EFFEBI-PRESS	M 15		578312	293,00
Carbon-S	M 18		578314	293,00
System M Profile ¹⁾	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
EFFEBI	V 12		578324	293,00
EFFEBI-PRESS	V 15		578328	293,00
Carbon-S	V 18		578332	293,00
System V Profile	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
EFFEBI	V 12		578324	293,00
EFFEBI-PRESS	V 14		578326	293,00
COPPER	VG 14		578338	293,00
	V 15		578328	293,00
	V 16		578330	293,00
	VG 16		578340	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
EFFEBI	V 12		578324	293,00
EFFEBI-PRESS UNICO	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
V 35 S (PR-2B)	Mini Z8	574762 R	276,00	
System	Pressing tongs Mini / pressing rings	Driven by adapler tongs	Art.-No.	лв.
EFFEBI	V 12		578324	293,00
EFFEBI-PRESS	V 15		578328	293,00
UNICO	V 18		578332	293,00
(GAS)	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	EFFEBI	M 15		578312
PRESSTIGE	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15		578328	293,00
V 18		578332	293,00	
V 22		578334	293,00	
V 28		578336	293,00	
V 35		578604	352,00	
V 15 S (PR-2B)	Mini Z8	574752 R	253,00	
V 18 S (PR-2B)	Mini Z8	574756 R	253,00	
V 22 S (PR-2B)	Mini Z8	574758 R	253,00	
V 28 S (PR-2B)	Mini Z8	574760 R	253,00	
V 35 S (PR-2B)	Mini Z8	574762 R	276,00	
EFFEBI	M 15		578312	293,00
PRESSTIGE 4E05	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 15		578312	293,00
PRESSTIGE-GAS	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)**	Mini Z8	574746 R	276,00
	V 15		578328	293,00
V 18		578332	293,00	
V 22		578334	293,00	
V 28		578336	293,00	
V 35		578604	352,00	
V 15 S (PR-2B)	Mini Z8	574752 R	253,00	
V 18 S (PR-2B)	Mini Z8	574756 R	253,00	
V 22 S (PR-2B)	Mini Z8	574758 R	253,00	
V 28 S (PR-2B)	Mini Z8	574760 R	253,00	
V 35 S (PR-2B)	Mini Z8	574762 R	276,00	
EFFEBI	TH 16		578352 R	354,00
TOF-GAS MULTIPINZA	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
H 32		578412	318,00	
U 16		578374	331,00	
U 20		578378	331,00	
U 26 ¹⁾		578392	387,00	
U 32		578382	387,00	
U 16 S (PR-2B)**	Mini Z8	574860 R	253,00	
U 20 S (PR-2B)**	Mini Z8	574862 R	253,00	
U 26 S (PR-2B)**	Mini Z8	574866 R	253,00	
U 32 S (PR-2B)	Mini Z8	574868 R	276,00	

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- ¹ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ² For taking suitable pressing inserts.
- ³ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- ⁴ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁶ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- ⁷ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
EFFEBI TOF MULTIPINZA	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	F 16		578456	337,00
	F 18		578458	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 32		578464	365,00
	Fz 40		578478	487,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	B 16		578468	385,00
	B 18		578470	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
EFIELD MULTILAYER PRESS DINGAS	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
EFIELD MULTILAYER PRESS WATER	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS ½" (OD 15,9 mm)		578566	354,00
	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1¼" (OD 34,9 mm)		578606	354,00
	B 16		578468	385,00
EMMETI GERPEX- FIVPRESS	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
	F 16		578456	337,00
	F 20		578460	337,00
	H 16		578400	318,00
	H 20		578406	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	U 16		578374	331,00
	U 20		578378	331,00
EMPUR	TH 14		578348	354,00
	TH 15		578350	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 15 S (PR-2B)**	Mini Z8	574780 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
Esta Rohr simplesta SH M	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Esta Rohr simplesta ST M	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
EUROTUBI EUROPA Inox Pressfitting System M-Profile ¹⁾	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Evans Components Presslok	VAU 15 (½") (OD 12,7 mm)		578630	302,00
	VAU 20 (¾") (OD 19,1 mm)		578632	302,00
	VAU 25 (1") (OD 25,4 mm)		578634	302,00
F				
FAR Rubinetterie PRESSFAR	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 14 S (PR-2B)**	Mini Z8	574858 R	253,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
F.B.Q. BARONIO BQ PRESS SOLAR	V 12		578324	293,00
	V 14		578326	293,00
	VG 14		578338	293,00
	V 15		578328	293,00
	V 16		578330	293,00
	VG 16		578340	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
F.B.Q. BARONIO BQ PRESS WATER	V 12		578324	293,00
	V 14		578326	293,00
	VG 14		578338	293,00
	V 15		578328	293,00
	V 16		578330	293,00
	VG 16		578340	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
F.B.Q. BARONIO BQ PRESS GAS	V 12		578324	293,00	FERRO systems BRASELI GPF PPSU Pressfitting PEX y MULTICAPA	U 16		578374	331,00
	V 14		578326	293,00		U 18		578376	331,00
	VG 14		578338	293,00		U 20		578378	331,00
	V 15		578328	293,00		U 25		578380	331,00
	V 16		578330	293,00		U 32		578382	387,00
	VG 16		578340	293,00		U 40		578386	472,00
	V 18		578332	293,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	V 22		578334	293,00		U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	V 28		578336	293,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	V 35		578604	352,00		U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00		U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
	V 14 S (PR-2B)	Mini Z8	574800 R	253,00	FERRO systems BRASELI GPF PRESS Pressfitting PEX FILINOX Instalpress Steel	RFz 16		578492	368,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00		RFz 20		578494	368,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00		RFz 25		578496	368,00
	V 16 S (PR-2B)	Mini Z8	574802 R	253,00		RFz 32		578498	368,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00		M 15		578312	293,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00		M 18		578314	293,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00		M 22		578316	293,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00		M 28		578318	293,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00		M 35		578390	352,00
						M 15 S (PR-2B)	Mini Z8	574738 R	253,00
						M 18 S (PR-2B)	Mini Z8	574740 R	253,00
FERCOFLOOR DUO Press FERCO PEX	RFz 16		578492	368,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	RFz 20		578494	368,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	RFz 25		578496	368,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	RFz 32		578498	368,00	FILINOX Instalpress Inox	M 15		578312	293,00
	TH 16		578352 R	354,00		M 18		578314	293,00
	TH 20		578358 R	354,00		M 22		578316	293,00
	TH 25		578360	354,00		M 28		578318	293,00
	TH 32		578364	354,00		M 35		578390	352,00
	TH 40		578624	469,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
FERCOFLOOR DUO Press MULTIFER	RFz 16		578492	368,00	FITTINGS ESTÁNDAR ECO-PRESS	RFz 16		578492	368,00
	RFz 20		578494	368,00		RFz 20		578494	368,00
	RFz 25		578496	368,00		RFz 25		578496	368,00
	RFz 32		578498	368,00		RFz 32		578498	368,00
	TH 16		578352 R	354,00	FITTINGS ESTÁNDAR MULTICAPA	RFz 16		578492	368,00
	TH 20		578358 R	354,00		RFz 18		578638	368,00
	TH 25		578360	354,00		RFz 20		578494	368,00
	TH 32		578364	354,00		RFz 25		578496	368,00
	TH 40		578624	469,00		RFz 32		578498	368,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00	FITTINGS ESTÁNDAR PE-X	RFz 16		578492	368,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		RFz 20		578494	368,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		RFz 25		578496	368,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		RFz 32		578498	368,00
	U 16		578374	331,00	FORNARA ForPress	B 16		578468	385,00
	U 18		578376	331,00		B 20		578472	385,00
	U 20		578378	331,00		B 26		578474	426,00
	U 25		578380	331,00		B 32		578476	426,00
	U 32		578382	387,00		F 16		578456	337,00
	U 40		578386	472,00		F 20		578460	337,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		F 26		578462	365,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00		F 32		578464	365,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00		F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
FERRO systems BRASELI GPF GAS	TH 16		578352 R	354,00		F 32 S (PR-2B)**	Mini Z8	574734 R	276,00
	TH 20		578358 R	354,00		H 16		578400	318,00
	TH 25		578360	354,00		H 20		578406	318,00
	TH 32		578364	354,00		H 26		578410	318,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		H 32		578412	318,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		TH 16		578352 R	354,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		TH 20		578358 R	354,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		TH 26		578362 R	354,00
FERRO systems BRASELI GPF MULT Pressfitting MULTICAPA	U 16		578374	331,00		TH 32		578364	354,00
	U 18		578376	331,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	U 20		578378	331,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	U 25		578380	331,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	U 32		578382	387,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 40		578386	472,00		U 16		578374	331,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		U 20		578378	331,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00		U 26 ¹⁾		578392	387,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		U 32		578382	387,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
						U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
						U 32 S (PR-2B)	Mini Z8	574868 R	276,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.	
FORZA WATER CRIMP (AUS)	K16/P18		578592	368,00	
	K/20		578594	368,00	
	K/25		578596	368,00	
	K32		578598	368,00	
	K1/40		578600	368,00	
FORZA STAINLESS WATER CRIMP	K16/P18		578592	368,00	
	K/20		578594	368,00	
FORZA STESSO PEX WATER AND GAS CRIMP AUS)	U 16		578374	331,00	
	U 20		578378	331,00	
	U 25		578380	331,00	
	U 32		578382	387,00	
	U 40		578386	472,00	
FORZA GAS CRIMP (AUS)	K16/P18		578592	368,00	
	K/20		578594	368,00	
	K/25		578596	368,00	
	K32		578598	368,00	
	K1/40		578600	368,00	
FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)		578630	302,00	
	VAU 20 (OD 19,1 mm)		578632	302,00	
	VAU 25 (OD 25,4 mm)		578634	302,00	
	VAU 32 (OD 31,8 mm)		578636	318,00	
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	253,00	
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	253,00	
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	276,00	
FORZA STAINLESS V PRESS (AUS)	V 15		578328	293,00	
	V 22		578334	293,00	
	V 28		578336	293,00	
	V 35		578604	352,00	
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00	
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00	
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00	
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00	
	> Rubinetterie Bresciane Bonomi				
Fränkische alpex-duo XS	F 16		578456	337,00	
	F 20		578460	337,00	
	F 26		578462	365,00	
	F 32		578464	365,00	
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00	
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00	
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00	
	F 32 S (PR-2B)**	Mini Z8	574734 R	276,00	
	TH 16		578352 R	354,00	
	TH 20		578358 R	354,00	
	TH 26		578362 R	354,00	
	TH 32		578364	354,00	
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00	
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00	
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00	
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00	
	Fränkische alpex F50 PROFi	F 16		578456	337,00
F 20			578460	337,00	
F 26			578462	365,00	
F 32			578464	365,00	
F 16 S (PR-2B)**		Mini Z8	574728 R	253,00	
F 20 S (PR-2B)**		Mini Z8	574730 R	253,00	
F 26 S (PR-2B)**		Mini Z8	574732 R	253,00	
F 32 S (PR-2B)**		Mini Z8	574734 R	276,00	
H 16			578400	318,00	
H 20			578406	318,00	
H 26			578410	318,00	
H 32			578412	318,00	
TH 16			578352 R	354,00	
TH 20			578358 R	354,00	
TH 26			578362 R	354,00	
TH 32			578364	354,00	
TH 16 S (PR-2B)**		Mini Z8	574782 R	253,00	
TH 20 S (PR-2B)**		Mini Z8	574788 R	253,00	
TH 26 S (PR-2B)**		Mini Z8	574794 R	253,00	
TH 32 S (PR-2B)**		Mini Z8	574798 R	276,00	
(DN 26)		U 16		578374	331,00
		U 20		578378	331,00
		U 25		578380	331,00
	U 32		578382	387,00	
	VP 16		578482	352,00	
	VP 20		578484	352,00	
	VP 32		578488	389,00	
Fränkische alpex L	Fz 40		578478	487,00	
G					
gabotherm H+S	TH 10		578342	354,00	
	TH 12		578346	354,00	
	TH 14		578348	354,00	
	TH 15		578350	354,00	
	TH 16		578352 R	354,00	
	TH 17		578354	354,00	
	TH 18		578356	354,00	
	TH 20		578358 R	354,00	
	TH 25		578360	354,00	
	TH 26		578362 R	354,00	
	TH 32		578364	354,00	
	TH 40		578624	469,00	
	TH 10 S (PR-2B)**	Mini Z8	574772 R	253,00	
	TH 12 S (PR-2B)**	Mini Z8	574776 R	253,00	
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00	
	TH 15 S (PR-2B)**	Mini Z8	574780 R	253,00	
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00	
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00	
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00	
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00	
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00	
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00	
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00	

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Gallagher USA YogaPipe ACR	H 12 (¼")		578396	318,00
	U 14 (⅜")		578372	349,00
	U 16 (½")		578374	331,00
	U 18 (¾")		578376	331,00
	U 20 (¾")		578378	331,00
	U 25 (⅞")		578380	331,00
	U 32 (1⅝")		578382	387,00
	GFFb 16–40		578670 R	980,00
Geberit Mapress CuNiFe	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Geberit Mapress C-STÄHL	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
Geberit Mapress C-STÄHL Sprinkler nass	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
Geberit Mapress Edelstahl	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
Geberit Mapress Edelstahl Gas	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
Geberit Mapress Edelstahl Sprinkler	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Geberit Mapress Kupfer	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
Geberit Mapress Kupfer Gas	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
Geberit Mapress Therm	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
Geberit Mepla	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
Geberit Mepla Therm	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	G 16		578444	354,00
	G 20		578446	354,00
Geberit Volex	G 26		578448	376,00
	G 32		578450	400,00
	G 40		578452	520,00
	G 16		578444	354,00
Geberit Volex	G 20		578446	354,00
	G 26		578448	376,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
General Fittings ST00	H 16		578400	318,00	General Fittings Trident	H 16		578400	318,00
	H 20		578406	318,00		H 20		578406	318,00
	H 25		578408	318,00		H 26		578410	318,00
	H 26		578410	318,00		H 32		578412	318,00
	H 32		578412	318,00		TH 16		578352 R	354,00
	TH 16		578352 R	354,00		TH 20		578358 R	354,00
	TH 20		578358 R	354,00		TH 26		578362 R	354,00
	TH 25		578360	354,00		TH 32		578364	354,00
	TH 26		578362 R	354,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 32		578364	354,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 40		578624	469,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		U 16		578374	331,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		U 20		578378	331,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		U 32		578382	387,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 16		578374	331,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 20		578378	331,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 25		578380	331,00	General Fittings Trident Gas	H 16		578400	318,00
	U 32		578382	387,00		H 20		578406	318,00
	U 40		578386	472,00		H 26		578410	318,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		TH 16		578352 R	354,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		TH 20		578358 R	354,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00		TH 26		578362 R	354,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		TH 32		578364	354,00
General Fittings Ewoprex	H 16		578400	318,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	H 20		578406	318,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	H 26		578410	318,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	H 32		578412	318,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00		U 16		578374	331,00
	TH 20		578358 R	354,00		U 20		578378	331,00
	TH 26		578362 R	354,00		U 32		578382	387,00
	TH 32		578364	354,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	TH 40		578624	469,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00	Giacomini Raccordi RM	H 16		578400	318,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		H 20		578406	318,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		H 26		578410	318,00
	U 16		578374	331,00		H 32		578412	318,00
	U 20		578378	331,00		TH 16		578352 R	354,00
General Fittings Serie 5S00	U 32		578382	387,00	Giacomini	TH 20		578358 R	354,00
	U 40		578386	472,00		TH 26		578362 R	354,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		TH 32		578364	354,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		TH 40		578624	469,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		U 16		578374	331,00
	B 16		578468	385,00	Giacomini RM MULTIGAS	U 20		578378	331,00
	B 18		578470	385,00		U 32		578382	387,00
	B 20		578472	385,00		U 40		578386	472,00
	B 26		578474	426,00		H 16		578400	318,00
	B 32		578476	426,00		H 20		578406	318,00
	F 16		578456	337,00		H 26		578410	318,00
	F 20		578460	337,00		H 32		578412	318,00
	F 26		578462	365,00		TH 16		578352 R	354,00
	F 32		578464	365,00		TH 20		578358 R	354,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00		TH 26		578362 R	354,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00		TH 32		578364	354,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00	Giacomini Valvole Giacomini serie R850V	U 16		578374	331,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	276,00		U 20		578378	331,00
	H 16		578400	318,00		U 32		578382	387,00
	H 18		578404	318,00		V 15		578328	293,00
	H 20		578406	318,00		V 18		578332	293,00
	H 25		578408	318,00		V 22		578334	293,00
	H 26		578410	318,00		V 28		578336	293,00
	H 32		578412	318,00		V 35		578604	352,00
	TH 16		578352 R	354,00		SA 15		578514	352,00
	TH 18		578356	354,00		SA 18		578518	352,00
General Fittings Serie 5S00	TH 20		578358 R	354,00		SA 22		578520	352,00
	TH 25		578360	354,00		SA 28		578522	352,00
	TH 26		578362 R	354,00		M 15		578312	293,00
	TH 32		578364	354,00		M 18		578314	293,00
	TH 40		578624	469,00		M 22		578316	293,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		M 28		578318	293,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00		M 35		578390	352,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00	Golan Pipe Systems (Scandinavia)	U 16		578374	331,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		U 20		578378	331,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		U 25		578380	331,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		U 32		578382	387,00
	U 16		578374	331,00	Alu-Pres	U 40		578386	472,00
	U 18		578376	331,00		VUS ½" (OD 15,9 mm)		578566	354,00
	U 20		578378	331,00		VUS ¾" (OD 22,2 mm)		578568	354,00
	U 25		578380	331,00		VUS 1" (OD 28,6 mm)		578570	354,00
	U 32		578382	387,00	Grinnell G-PRESS Copper Fittings	VUS 1½" (OD 34,9 mm)		578606	354,00
	U 40		578386	472,00					
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00					
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00					
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00					
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00					
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
GS Wärmesysteme System TH	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
GS Wärmesysteme System V	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
H				
HASTINIK Hastinik/Hitpress	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
heima24	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
HELIROMA Klimapress	U 20		578378	331,00
	U 32		578382	387,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
HELIROMA Klimapress PPSU	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
Henco	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	HE 32		578370 R	422,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
Herotec tempusPRESS PLUS	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Herotec tempusPRESS PLUS PPSU	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
HERZ PIPEFIX	TH 10		578342	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 10 S (PR-2B)**	Mini Z8	574772 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
HIDRONIX MULTIGAS	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
HIDRONIX MULTIPIPE	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
HIDRONIX UNICO	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
HITEC Sistema Multistrato	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
HITHERM-ISOTUBI NUMEPRESS	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
HITHERM-ISOTUBI HTpress	M 15		578312	293,00	ICMA Sempigas	TH 16		578352 R	354,00
	M 18		578314	293,00		TH 20		578358 R	354,00
	M 22		578316	293,00		TH 25		578360	354,00
	M 28		578318	293,00		TH 26		578362 R	354,00
	M 35		578390	352,00		TH 32		578364	354,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00	ICOOOL PACIFIC COOL PRESS	BMP ¼"		578700	350,00
HITHERM-ISOTUBI HTfire	M 15		578312	293,00		BMP ¾"		578702	350,00
	M 18		578314	293,00		BMP ½"		578704	350,00
	M 22		578316	293,00		BMP ¾"		578706	350,00
	M 28		578318	293,00		BMP ¾"		578708	350,00
	M 35		578390	352,00		VUS ¾" (OD ¾", 22.2 mm)		578568	354,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		BMP 1½"		578714	350,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		BMP ¼" S (PR-2B)	Mini Z8	574810 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		BMP ¾" S (PR-2B)	Mini Z8	574812 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		BMP ½" S (PR-2B)	Mini Z8	574814 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		BMP ⅝" S (PR-2B)	Mini Z8	574816 R	253,00
HITHERM-ISOTUBI HTair	M 15		578312	293,00		BMP ¾" S (PR-2B)	Mini Z8	574818 R	253,00
	M 18		578314	293,00		VUS ¾" S (PR-2B) (OD ¾", 22.2 mm)	Mini Z8	574766 R	253,00
	M 22		578316	293,00		BMP 1 ⅝" S (PR-2B)	Mini Z8	574824 R	253,00
	M 28		578318	293,00	Idrosanitaria Bonomi	TH 16		578352 R	354,00
	M 35		578390	352,00		TH 20		578358 R	354,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		TH 26		578362 R	354,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00	Homegas	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00					
Hopewell press fit system	M 15		578312	293,00	Idrosanitaria Bonomi	TH 16		578352 R	354,00
	M 18		578314	293,00		TH 18		578356	354,00
	M 22		578316	293,00	Idropress	TH 20		578358 R	354,00
	M 28		578318	293,00		TH 26		578362 R	354,00
	M 35		578390	352,00		TH 32		578364	354,00
hp praski BAVARIA-press	TH 10		578342	354,00		TH 40		578624	469,00
	TH 12		578346	354,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 14		578348	354,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 16		578352 R	354,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 17		578354	354,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 20		578358 R	354,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 25		578360	354,00	IDROSISTEMI Ta-Press	TH 16		578352 R	354,00
	TH 26		578362 R	354,00		TH 20		578358 R	354,00
	TH 32		578364	354,00		TH 26		578362 R	354,00
	TH 40		578624	469,00		TH 32		578364	354,00
	TH 10 S (PR-2B)**	Mini Z8	574772 R	253,00		TH 40		578624	469,00
	TH 12 S (PR-2B)**	Mini Z8	574776 R	253,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		F 16		578456	337,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		F 20		578460	337,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		F 26		578462	365,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		F 32		578464	365,00
						F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
						F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
						F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
						F 32 S (PR-2B)	Mini Z8	574734 R	276,00
						Fz 40		578478	487,00
						H 16		578400	318,00
ICMA Sempiter	H 16		578400	318,00		H 20		578406	318,00
	H 20		578406	318,00		H 26		578410	318,00
	H 25		578408	318,00		H 32		578412	318,00
	H 26		578410	318,00		TH 16		578352 R	354,00
	H 32		578412	318,00		TH 20		578358 R	354,00
	TH 16		578352 R	354,00		TH 25		578360	354,00
	TH 20		578358 R	354,00		TH 26		578362 R	354,00
	TH 25		578360	354,00		TH 32		578364	354,00
	TH 26		578362 R	354,00		TH 40		578624	469,00
	TH 32		578364	354,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 40		578624	469,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		U 16		578374	331,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		U 20		578378	331,00
	U 16		578374	331,00		U 25		578380	331,00
	U 20		578378	331,00		U 26 ⁷⁾		578392	387,00
	U 25		578380	331,00		U 32		578382	387,00
	U 26 ⁷⁾		578392	387,00		U 40		578386	472,00
	U 32		578382	387,00					
	U 40		578386	472,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
IDROTRADE Storm Multipinza	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	THL 32		578368	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
IDROTRADE StormPRES ¹⁾	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
IDROTRADE StormSTEEL ¹⁾	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Instantor Press System	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
Instantor Copper Press Imperial	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	VI ½" (OD 14,7 mm)		578716	350,00
	VI ¾" (OD 21,0 mm)		578718	350,00
	VI 1" (OD 27,4 mm)		578720	350,00
	VI ½" S (PR-2B)	Mini Z8	574850 R	253,00
	VI ¾" S (PR-2B)	Mini Z8	574852 R	253,00
Instantor Copper Press Metric	VI 1" S (PR-2B)	Mini Z8	574854 R	253,00
	M 15		578312	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
INVENA PROV	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	B 16		578468	385,00
	B 20		578472	385,00
IPA IPANA Press	TH 10		578342	354,00
	TH 11,6		578344	354,00
	TH 12		578346	354,00
	TH 14		578348	354,00
	TH 15		578350	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 22		578588	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 28		578590	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 10 S (PR-2B)**	Mini Z8	574772 R	253,00
	TH 11,6 S (PR-2B)**	Mini Z8	574774 R	253,00
	TH 12 S (PR-2B)**	Mini Z8	574776 R	253,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 15 S (PR-2B)**	Mini Z8	574780 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 22 S (PR-2B)**	Mini Z8	574790 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 28 S (PR-2B)**	Mini Z8	574796 R	276,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
IPA THu IPANA Press	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
IPALPEX (Industrie du Plastique et Accessoires)	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	THL 32		578368	354,00
	TH 40		578624	469,00
IPLEX PIPELINES AUSTRALIA Iplex K2	K16/P18		578592	368,00
	K/20		578594	368,00
	K/25		578596	368,00
	K32		578598	368,00
	K1/40		578600	368,00
	K16/P18		578592	368,00
	K/20		578594	368,00
	K/25		578596	368,00
ISOTUBI NUMEPRESS	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
IVAR ALPEX-GAS	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
IVAR Ivar-Press	B 14		578466	385,00
	B 16		578468	385,00
	B 18		578470	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
	Fz 40		578478	487,00
IVAR MULTI PRESS GAS ITALIA	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	U 16		578374	331,00
IVAR Multi Press MP	U 20		578378	331,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	F 16		578456	337,00
	F 18		578458	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 32		578464	365,00
	Fz 40		578478	487,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	B 16		578468	385,00
	B 18		578470	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
IVAR Multi Press Leak (MPL)	TH 16		578352 R	354,00	IVAR Plastic Multi Press Leak (PMPL)	TH 16		578352 R	354,00
	TH 20		578358 R	354,00		TH 20		578358 R	354,00
	TH 26		578362 R	354,00		TH 26		578362 R	354,00
	TH 32		578364	354,00		TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	F 16		578456	337,00		F 16		578456	337,00
	F 20		578460	337,00		F 20		578460	337,00
	F 26		578462	365,00		F 26		578462	365,00
	F 32		578464	365,00		F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00		F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00		F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00		F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00		F 32 S (PR-2B)	Mini Z8	574734 R	276,00
	H 16		578400	318,00		H 16		578400	318,00
	H 20		578406	318,00		H 20		578406	318,00
	H 26		578410	318,00		H 26		578410	318,00
	H 32		578412	318,00		H 32		578412	318,00
	U 16		578374	331,00		U 16		578374	331,00
	U 20		578378	331,00		U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00		U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00		U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00		U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	B 16		578468	385,00		B 16		578468	385,00
	B 20		578472	385,00		B 20		578472	385,00
	B 26		578474	426,00		B 26		578474	426,00
	B 32		578476	426,00		B 32		578476	426,00
IVAR Plastic Multi Press PMP	TH 16		578352 R	354,00	IVT Edelstahl- Presssystem	M 15		578312	293,00
	TH 20		578358 R	354,00		M 18		578314	293,00
	TH 25		578360	354,00		M 22		578316	293,00
	TH 26		578362 R	354,00		M 28		578318	293,00
	TH 32		578364	354,00		M 35		578390	352,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	F 16		578456	337,00	IVT PRIPRESS	TH 16		578352 R	354,00
	F 20		578460	337,00		TH 20		578358 R	354,00
	F 26		578462	365,00		TH 26		578362 R	354,00
	F 32		578464	365,00		TH 32		578364	354,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00		TH 40		578624	469,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	H 16		578400	318,00		TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	H 20		578406	318,00	J				
	H 25		578408	318,00	Jäger – Aquatec Aquapress H	H 14		578398	318,00
	H 26		578410	318,00		H 16		578400	318,00
	H 32		578412	318,00		H 17		578402	318,00
	U 16		578374	331,00		H 18		578404	318,00
	U 20		578378	331,00		H 20		578406	318,00
	U 25		578380	331,00		H 26		578410	318,00
	U 26 ⁷⁾		578392	387,00		H 32		578412	318,00
	U 32		578382	387,00		U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00	Jäger – Aquatec C-Stahl Press Typ M	M 15		578312	293,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		M 18		578314	293,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00		M 22		578316	293,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00		M 28		578318	293,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		M 35		578390	352,00
	B 16		578468	385,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	B 20		578472	385,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	B 26		578474	426,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	B 32		578476	426,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
						M 35 S (PR-2B)	Mini Z8	574746 R	276,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Jäger - Aquatec Edelstahl Press Typ M	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
Jäger - Aquatec Kupfer Press Typ V	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
Jansen AG JANSEN COMISA	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
Jaraflex- Pressssystem	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
JUNGWOO JWPress	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
JUNGWOO JWPress	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	VUS ½" (OD 15,9 mm)		578566	354,00
	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1½" (OD 34,9 mm)		578606	354,00
K				
KAN KAN-therm Press LBP	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
KAN KAN-therm Press LBP	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
KAN KAN-therm Press LBP	U 32		578382	387,00
	U 40		578386	472,00
	U 14 S (PR-2B)**	Mini Z8	574858 R	253,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
KAN KAN-therm Press LBP	M 15		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22		578316	293,00
	M 28 ¹⁾		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
KAN KAN-therm Press LBP	M 35 S (PR-2B)	Mini Z8	574746 R	276,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
KAN KAN-therm Steel	M 12		578310	293,00
	M 15		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22		578316	293,00
	M 28 ¹⁾		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
KAN KAN-therm UltraPRESS	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
U 32		578382	387,00	
U 40		578386	472,00	
KE KELIT COPPERFIX Kupfer	U 14 S (PR-2B)**	Mini Z8	574858 R	253,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
KE KELIT KELIT KELOX	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
KE KELIT KELOX-PPSU-W	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
KE KELIT KELOX-ULTRAX	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
KE KELIT KELOX-ULTRAX-W	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 16		578374	331,00
KE KELIT KELOX-ULTRAX-W	U 18		578376	331,00
	U 2			

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
KE KELIT KELOX-WINDOW-U	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
KE KELIT KELOX-WINDOW-W	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
KE KELIT steelFIX C-Stahl	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
KE KELIT steelFIX Edelstahl	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
KEMBLA KemPress (AUS)	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	VAU 15 (OD 12,7 mm)		578630	302,00
	VAU 20 (OD 19,1 mm)		578632	302,00
	VAU 25 (OD 25,4 mm)		578634	302,00
	VAU 32 (OD 31,8 mm)		578636	318,00
	VAU 15 (OD 12,7 mm)		578630	302,00
	VAU 20 (OD 19,1 mm)		578632	302,00
	VAU 25 (OD 25,4 mm)		578634	302,00
	VAU 32 (OD 31,8 mm)		578636	318,00
KISAN Kisan KD	KI 16		578524	374,00
	KI 20		578526	374,00
	KI 25		578528	374,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
KISAN Kisan WL/ WP	KI 16		578524	374,00
	KI 20		578526	374,00
	KI 25		578528	374,00
	KI 32		578530	510,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
KISAN Kisan WR	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
KISAN Kistal C	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
KISAN Kistal Inox	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
L				
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		578566	354,00
	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1¼" (OD 34,9 mm)		578606	354,00
LK Systems LK >B<-Press	V 12		578324	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
LK Systems LK >B<-Press Elförzinkat	V 12		578324	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
LK Systems LK >B<-Press Gas	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
LK Systems	TH 16		578352 R	354,00
LK Universal	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
M				
MAINCOR	U 16		578374	331,00
MAINPRESS	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
MAINCOR	U 16		578374	331,00
MAINFLOR	U 20		578378	331,00
Mair Heiztechnik	H 11,5		578394	318,00
M-Press	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
Ma.s.ter System	TH 14		578348	354,00
PRESSMASTER	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
Meier Tobler	H 16		578400	318,00
metalplast - Stramax	H 20		578406	318,00
Serie XPRT	H 25		578408	318,00
	H 32		578412	318,00
	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
METALGRUP	U 16		578374	331,00
Permatubo	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
METALGRUP	RFz 16		578492	368,00
PexGrup	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
METALGRUP	U 16		578374	331,00
MultiGrup	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
M-Press Fittings Ltd	M 15		578312	293,00
M-Press Carbon Steel	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
M-Press Fittings Ltd	M 15		578312	293,00
M-Press Copper	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
M-Press Fittings Ltd	M 15		578312	293,00
M-Press Stainless Steel	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Mueller Streamline	VUS ½" (OD 15,9 mm)		578566	354,00
PRS Copper Press	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1¼" (OD 34,9 mm)		578606	354,00
MULTITHERM	TH 16		578352 R	354,00
PRESSSYSTEM	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
Multicapas Industrial	RFz 16		578492	368,00
AIS PEX	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
Multicapas Industrial	H 16		578400	318,00
AIS PPSU	H 20		578406	318,00
	H 25		578408	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
Multicap Industrial AIS XPRT	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
Multicap Industrial multitubo systems MC	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
Multicap Industrial multitubo systems MM	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
multipipe Deutschland multipipe mp	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
Nussbaum Optifitt-Press	VMP ¾" (OD 17,2 mm)		578660	408,00
	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Nussbaum Optiflex-Flowpress	VRX 16		578640	370,00
	VRX 20		578642	370,00
	VRX 25		578644	408,00
	VRX 32		578646	408,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
Nussbaum Optipress Aquaplus	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
Nussbaum Optipress Gaz	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
Nussbaum Optipress-Therm	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
Oventrop Cofit P	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
Oventrop Cofit PD	H 26 A		578430	411,00
	H 32 A		578432	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
Oventrop Cofit PDK	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
Oventrop Cofit PD-HT	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
Oventrop Cofit PDK-HT	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
	H 26 A		578430	411,00
	H 16 A		578420	411,00
	H 20 A		578426	411,00
P				
PBTub	RFz 12		578490	368,00
SERTIPRESS	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
PBTub SERTI-STEEL ¹⁾	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
Pegler Yorkshire	> Aalberts integrated piping systems			
PERFEXIM PERFEKT SYSTEM	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
PERFEXIM PERFEKT SYSTEM PLUS	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
PERFILTUBO PERFILALUPEX	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578362	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
PERFILTUBO PERFILPRESS	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	M 15		578312	293,00
	M 18		578314	293,00
PERFILTUBO PERFILPRESS	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
PEXTUBE PexTube	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
Pipelife C-PRESS	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
Pipelife Edelstahl	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
Pipelife RADOPRESS	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
Pipetec Connect	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
PLASTICA ALFA Multypex	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
PLASTICA ALFA Multypex Air	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
PLASTICA ALFA Multypexalfa Gas	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
PLASTICA ALFA Multypexalfa Gas protek	TH 26		578362 R	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
PLASTICA ALFA Multypex Plus	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
PLASTICA ALFA Multypex Thermo	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
PLASTICA ALFA Multypex Thermo Plus	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
PLÁSTICOS FERRO	U 16		578374	331,00	POLYSAN	M 15		578312	293,00
FERROPLAST	U 20		578378	331,00	Handelsoges.	M 18		578314	293,00
GPf MULT Pressfitting	U 25		578380	331,00	m.b.H. & Co KG	M 22		578316	293,00
MULTICAPA	U 32		578382	387,00	(Krems/Öster- reich)	M 28		578318	293,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		M 35		578390	352,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00	POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00	Edelstahl	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00	Press-System Gas	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
						M 28 S (PR-2B)	Mini Z8	574744 R	253,00
PLÁSTICOS FERRO	U 16		578374	331,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
FERROPLAST	U 20		578378	331,00	POLYSAN	M 15		578312	293,00
GPf PPSU	U 25		578380	331,00	Handelsoges.	M 18		578314	293,00
Pressfitting PEX	U 32		578382	387,00	m.b.H. & Co KG	M 22		578316	293,00
y MULTICAPA	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00	(Krems/Öster- reich)	M 28		578318	293,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		M 35		578390	352,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00	POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00	Edelstahl	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
PLÁSTICOS FERRO	RFz 16		578492	368,00	Press-System	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
FERROPLAST	RFz 20		578494	368,00	Wasser	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
GPf PRESS	RFz 25		578496	368,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Pressfitting PEX	RFz 32		578498	368,00	POLYSAN	TH 14		578348	354,00
PLUMBING PLUS	K16/P18		578592	368,00	Handelsoges.	TH 16		578352 R	354,00
EZiPEX Crimp	K/20		578594	368,00	m.b.H. & Co KG	TH 17		578354	354,00
(AUS)	K/25		578596	368,00	(Krems/Öster- reich)	TH 18		578356	354,00
	K32		578598	368,00		TH 20		578358 R	354,00
	K1/40		578600	368,00	POLYSAN-	TH 26		578362 R	354,00
PLUMBING PLUS	K16/P18		578592	368,00	Press-System	TH 32		578364	354,00
EZiPEX Gas	K/20		578594	368,00		TH 40		578624	469,00
(AUS)	K/25		578596	368,00		TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	K32		578598	368,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	K1/40		578600	368,00		TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
PLUMBING PLUS	Yz 16 UNI		578756 R	368,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
UNIPEX	Yz 20 UNI		578758 R	368,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
Water & Gas (AUS)	Yz 25 UNI		578760 R	368,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	Yz 32 UNI		578762 R	368,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		578630	302,00	POLYSAN	TH 14		578348	354,00
EZiPRESS Gas	VAU 20 (OD 19,1 mm)		578632	302,00	Handelsoges.	TH 16		578352 R	354,00
(AUS)	VAU 25 (OD 25,4 mm)		578634	302,00	m.b.H. & Co KG	TH 17		578354	354,00
	VAU 32 (OD 31,8 mm)		578636	318,00	(Krems/Öster- reich)	TH 18		578356	354,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	253,00		TH 20		578358 R	354,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	253,00	POLYSAN-Henco-	TH 26		578362 R	354,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	276,00	Press-System	HE 32		578370 R	422,00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		578630	302,00		TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
EZiPRESS Solar	VAU 20 (OD 19,1 mm)		578632	302,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
(AUS)	VAU 25 (OD 25,4 mm)		578634	302,00		TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	253,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	253,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	276,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		578630	302,00	Prandelli	H 14		578398	318,00
EZiPRESS Water	VAU 20 (OD 19,1 mm)		578632	302,00	Multyrama Pf	H 16		578400	318,00
(AUS)	VAU 25 (OD 25,4 mm)		578634	302,00		H 18		578404	318,00
	VAU 32 (OD 31,8 mm)		578636	318,00		H 20		578406	318,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	253,00		H 26		578410	318,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	253,00		H 32		578412	318,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	276,00		U 40		578386	472,00
POLYPIPE	TH 10		578342	354,00	Prandelli	H 16		578400	318,00
POLYSURE	TH 15		578350	354,00	Multyrama Pfm	H 18		578404	318,00
	TH 22		578588	354,00		H 20		578406	318,00
	TH 28		578590	354,00		H 26		578410	318,00
POLYSAN	M 15		578312	293,00		H 32		578412	318,00
Handelsoges.	M 18		578314	293,00		TH 16		578352 R	354,00
m.b.H. & Co KG	M 22		578316	293,00		TH 18		578356	354,00
(Krems/Öster- reich)	M 28		578318	293,00		TH 20		578358 R	354,00
	M 35		578390	352,00		TH 26		578362 R	354,00
POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		TH 32		578364	354,00
C Stahl-Press- System M	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		TH 40		578624	469,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
POLYSAN	M 15		578312	293,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
Handelsoges.	M 18		578314	293,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
m.b.H. & Co KG	M 22		578316	293,00		U 16		578374	331,00
(Krems/Öster- reich)	M 28		578318	293,00		U 18		578376	331,00
	M 35		578390	352,00		U 20		578378	331,00
POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		U 40		578386	472,00
Edelstahl	M 18 S (PR-2B)	Mini Z8	574740 R	253,00					
Press-System	M 22 S (PR-2B)	Mini Z8	574742 R	253,00					
1.4520	M 28 S (PR-2B)	Mini Z8	574744 R	253,00					
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
PURMO Cleverfit Radial	F 16		578456	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	VP 16		578482	352,00
	VP 20		578484	352,00
	VP 32		578488	389,00
R				
Raccorderie Metalliche aesPRES ¹⁾	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Raccorderie Metalliche inoxPRES ¹⁾	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Raccorderie Metalliche MARINEPRES ¹⁾	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Raccorderie Metalliche steelPRES ¹⁾	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
RBM Tita-fix	B 14		578466	385,00
	B 16		578468	385,00
	B 18		578470	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	F 16		578456	337,00
	F 18		578458	337,00
	F 20		578460	337,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	H 14		578398	318,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00
	U 14		578372	349,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
RBM Tita-gas	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
Redi Nicoll Fluxo	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
Redi Nicoll Fluxo Gas	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	LD 16		578652	366,00
	LD 20		578654	366,00
	LD 25		578656	366,00
	U 14		578372	349,00
	U 16		578374	331,00
RIFENG LD PRESS FITTING (F8)	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
RIFENG U PRESS FITTING (F5)	TH 40		578624	469,00
	RfZ 12		578490	368,00
	RfZ 16		578492	368,00
	RfZ 20		578494	368,00
	RfZ 25		578496	368,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
RIQUIER A SERTIR	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
RIQUIER Système multicouche	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 32		578382	387,00
Roth PressCheck	U 40		578386	472,00
	RN 14		578434	331,00
	RN 16		578454	331,00
	RN 17		578436	331,00
	RN 20		578438	331,00
	RN 25/26		578440	331,00
	RN 32		578442	387,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS M	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS V	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 M	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
Rubinetterie Bresciane Bonomi FRABOPRESS 316 V	V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)		578324 578328 578332 578334 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	293,00 293,00 293,00 293,00 293,00 352,00 253,00 253,00 253,00 253,00 253,00 276,00	Rubinetterie Bresciane Bonomi FRABOPRESS V	V 15 V 18 V 22 V 28 V 35 V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578328 578332 578334 578604 574752 R 574756 R 574758 R 574760 R 574762 R	293,00 293,00 293,00 352,00 253,00 253,00 253,00 276,00
Rubinetterie Bresciane Bonomi FRABO CHROME	V 12 V 15 V 18 V 22 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B)		578324 578328 578332 578334 574748 R 574752 R 574756 R 574758 R	293,00 293,00 293,00 293,00 253,00 253,00 253,00 253,00	Rubinetterie Bresciane Bonomi FRABOPRESS C-STEEL M	M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R	293,00 293,00 293,00 293,00 352,00 253,00 253,00 253,00 276,00
Rubinetterie Bresciane Bonomi FRABOPRESS C-STEEL V	V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)		578324 578328 578332 578334 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	293,00 293,00 293,00 293,00 293,00 352,00 253,00 253,00 253,00 253,00 253,00 276,00	Rubinetterie Bresciane Bonomi FRABOPRESS GAS M	M 12 M 15 M 18 M 22 M 28 M 35 M 12 S (PR-2B) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578310 578312 578314 578316 578318 578390 574736 R 574738 R 574740 R 574742 R 574744 R 574746 R	293,00 293,00 293,00 293,00 293,00 352,00 253,00 253,00 253,00 253,00 276,00
Rubinetterie Bresciane Bonomi FRABOPRESS GAS V	V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)		578324 578328 578332 578334 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	293,00 293,00 293,00 293,00 293,00 352,00 253,00 253,00 253,00 253,00 253,00 276,00	Rubinetterie Bresciane Bonomi FRABOPRESS GAS V	V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578324 578328 578332 578334 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	293,00 293,00 293,00 293,00 293,00 352,00 253,00 253,00 253,00 253,00 276,00
Rubinetterie Bresciane Bonomi FRABOPRESS M	M 12 M 15 M 18 M 22 M 28 M 35 M 12 S (PR-2B) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)		578310 578312 578314 578316 578318 578390 574736 R 574738 R 574740 R 574742 R 574744 R 574746 R	293,00 293,00 293,00 293,00 293,00 352,00 253,00 253,00 253,00 253,00 253,00 276,00	Rubinetterie Bresciane Bonomi FRABOPRESS SA.MI PLASTIC	TH 14 TH 16 TH 18 TH 20 TH 26 TH 32 TH 40 TH 14 S (PR-2B)** TH 16 S (PR-2B)** TH 18 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)** TH 32 S (PR-2B)**	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578348 578352 R 578356 578358 R 578362 R 578364 578624 574778 R 574782 R 574786 R 574788 R 574794 R 574798 R	354,00 354,00 354,00 354,00 354,00 469,00 253,00 253,00 253,00 253,00 253,00 276,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
SA.MI PLASTIC Multistrato Gas	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
SANHA 3fit-Press Pb-free Serie 25000	B 16		578468	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
	F 16		578456	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 32		578464	365,00
	Fz 40		578478	487,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
SANHA 3fit-Press PPSU Serie 35000	B 16		578468	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
	F 16		578456	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
SANHA Heavy Steel Press	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
SANHA Heavy Steel Press Gas	VMP ½" G (OD 21,3 mm) ⁽⁴⁾		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15		578514	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15 ¹⁾		578328	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		578514	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15 ¹⁾		578328	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
SANHA-NiroSan- Presssystem Serie 9000	SA 15		578514	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15 ¹⁾		578328	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		578514	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15 ¹⁾		578328	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
SANHA NiroTherm Serie 91000	SA 15		578514	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15 ¹⁾		578328	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
SANHA NiroTherm Industry Serie 98000	SA 15		578514	352,00	SANHA-Press Pressfittings Serie 6000	SA 12		578510	520,00
	SA 18		578518	352,00		SA 14		578512	520,00
	SA 22		578520	352,00		SA 15		578514	352,00
	SA 28		578522	352,00		SA 16		578516	352,00
	M 15 ¹⁾		578312	293,00		SA 18		578518	352,00
	M 18 ¹⁾		578314	293,00		SA 22		578520	352,00
	M 22 ¹⁾		578316	293,00		SA 28		578522	352,00
	M 28		578318	293,00		M 12		578310	293,00
	M 35		578390	352,00		M 15 ¹⁾		578312	293,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		M 18 ¹⁾		578314	293,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		M 22 ¹⁾		578316	293,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		M 28		578318	293,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		M 35		578390	352,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	V 15 ¹⁾		578328	293,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	V 18 ¹⁾		578332	293,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	V 22 ¹⁾		578334	293,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	V 28		578336	293,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	V 35		578604	352,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00		V 12		578324	293,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00		V 14		578326	293,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00		VG 14		578338	293,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00		V 15 ¹⁾		578328	293,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00		V 16		578330	293,00
SANHA-Press Chrom Serie 16000	SA 12		578510	520,00	SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		578510	520,00
	SA 15		578514	352,00		SA 15		578514	352,00
	SA 18		578518	352,00		SA 18		578518	352,00
	SA 22		578520	352,00		SA 22		578520	352,00
	SA 28		578522	352,00		SA 28		578522	352,00
	M 12		578310	293,00		M 12		578310	293,00
	M 15 ¹⁾		578312	293,00		M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00		M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00		M 22 ¹⁾		578316	293,00
	M 28		578318	293,00		M 28		578318	293,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00		M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	V 12		578324	293,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	V 15 ¹⁾		578328	293,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 18 ¹⁾		578332	293,00		V 12		578324	293,00
	V 22 ¹⁾		578334	293,00		V 14		578326	293,00
	V 28		578336	293,00		VG 14		578338	293,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00		V 15 ¹⁾		578328	293,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00		V 16		578330	293,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00		VG 16		578340	293,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00		V 18 ¹⁾		578332	293,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00		V 22 ¹⁾		578334	293,00
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		578510	520,00	SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		578510	520,00
	SA 14		578512	520,00		SA 15		578514	352,00
	SA 15		578514	352,00		SA 18		578518	352,00
	SA 16		578516	352,00		SA 22		578520	352,00
	SA 18		578518	352,00		SA 28		578522	352,00
	SA 22		578520	352,00		M 12		578310	293,00
	SA 28		578522	352,00		M 15 ¹⁾		578312	293,00
	M 12		578310	293,00		M 18 ¹⁾		578314	293,00
	M 15 ¹⁾		578312	293,00		M 22 ¹⁾		578316	293,00
	M 18 ¹⁾		578314	293,00		M 28		578318	293,00
	M 22 ¹⁾		578316	293,00		M 35		578390	352,00
	M 28		578318	293,00		M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 35		578390	352,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00		M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		V 12		578324	293,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		V 14		578326	293,00
	V 12		578324	293,00		VG 14		578338	293,00
	V 14		578326	293,00		V 15 ¹⁾		578328	293,00
	VG 14		578338	293,00		V 16		578330	293,00
	V 15 ¹⁾		578328	293,00		VG 16		578340	293,00
	V 16		578330	293,00		V 18 ¹⁾		578332	293,00
	VG 16		578340	293,00		V 22 ¹⁾		578334	293,00
	V 18 ¹⁾		578332	293,00		V 28		578336	293,00
	V 22 ¹⁾		578334	293,00		V 35		578604	352,00
	V 28		578336	293,00		V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 35		578604	352,00		V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00		V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00		V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00		V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00		V 35 S (PR-2B)	Mini Z8	574762 R	276,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00					
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00					
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00					
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- 6) Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- 7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
SANHA PURAPRESS Serie 8000	SA 12		578510	520,00
	SA 14		578512	520,00
	SA 15		578514	352,00
	SA 16		578516	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 12 ¹⁾		578310	293,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28 ¹⁾		578318	293,00
	M 35 ¹⁾		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 12		578324	293,00
	V 14		578326	293,00
	VG 14		578338	293,00
	V 15 ¹⁾		578328	293,00
	V 16		578330	293,00
	VG 16		578340	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
SANHA-Therm Serie 24000	SA 12		578510	520,00
	SA 15		578514	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 12		578310	293,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 12		578324	293,00
	V 15 ¹⁾		578328	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
SANHA-Therm Industry Serie 28000	SA 12		578510	520,00
	SA 15		578514	352,00
	SA 18		578518	352,00
	SA 22		578520	352,00
	SA 28		578522	352,00
	M 12		578310	293,00
	M 15 ¹⁾		578312	293,00
	M 18 ¹⁾		578314	293,00
	M 22 ¹⁾		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	V 12		578324	293,00
	V 15 ¹⁾		578328	293,00
	V 18 ¹⁾		578332	293,00
	V 22 ¹⁾		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
SANITOP PERMATUBO INOX	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
SANPRO THPRESS	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
SATEC SK ViTerm	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	U 40		578386	472,00
SAVEUR REFLEX PEX Water	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
SAVEUR REFLEX PEX-AL-PEX Gas	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
Schütz duo-flex tri-o-flex	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
Schwer Fittings AQUApress	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
Seppelfricke	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	> Aalberts integrated piping systems			
SESTA SESTA GAS	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
SESTA sistema multistrato	H 16		578400	318,00
	H 20		578406	318,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	U 16		578374	331,00
	U 20		578378	331,00
SIGMA LI Premium	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
SLOVARM PEX-THERM	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	H 26		578410	318,00
	U 32		578382	387,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
STANDARD HIDRAULICA MultiStandard	RFz 16		578492	368,00	STH Westco COPPER PRESS	M 15		578312	293,00
	RFz 20		578494	368,00		M 22		578316	293,00
	RFz 25		578496	368,00		M 28		578318	293,00
	RFz 32		578498	368,00		M 35		578390	352,00
	U 16		578374	331,00		M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	U 18		578376	331,00		M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	U 20		578378	331,00		M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	U 25		578380	331,00		M 35 S (PR-2B)	Mini Z8	574746 R	276,00
	U 32		578382	387,00	T				
	U 40		578386	472,00	TDM BRASS Serie 1600	H 16		578400	318,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		H 18		578404	318,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00		H 20		578406	318,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		H 25		578408	318,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00		H 26		578410	318,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		H 32		578412	318,00
STANDARD HIDRAULICA MultiStandard PLUS	H 16		578400	318,00		TH 16		578352 R	354,00
	H 20		578406	318,00		TH 18		578356	354,00
	H 25		578408	318,00		TH 20		578358 R	354,00
	H 32		578412	318,00		TH 25		578360	354,00
	RFz 16		578492	368,00		TH 26		578362 R	354,00
	RFz 20		578494	368,00		THL 32		578368	354,00
	RFz 25		578496	368,00		TH 40		578624	469,00
	RFz 32		578498	368,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 16		578352 R	354,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20		578358 R	354,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25		578360	354,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32		578364	354,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		U 16		578374	331,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		U 18		578376	331,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00		U 20		578378	331,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	276,00		U 25		578380	331,00
	U 16		578374	331,00		U 26 ⁷⁾		578392	387,00
	U 18		578376	331,00		U 32		578382	387,00
	U 20		578378	331,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 25		578380	331,00		U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 32		578382	387,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 40		578386	472,00		U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00	TDM BRASS Serie 2600	H 16		578400	318,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00		H 18		578404	318,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00		H 20		578406	318,00
steeltrade Pressssystem Edelstahl Kontur M	M 15		578312	293,00		H 25		578408	318,00
	M 18 ¹⁾		578314	293,00		H 26		578410	318,00
	M 22		578316	293,00		H 32		578412	318,00
	M 28 ¹⁾		578318	293,00		TH 16		578352 R	354,00
	M 35		578390	352,00		TH 18		578356	354,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00		TH 20		578358 R	354,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00		TH 25		578360	354,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00		TH 26		578362 R	354,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00		THL 32		578368	354,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
						TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
						TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
STELBI Polikraft	H 16		578400	318,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	H 20		578406	318,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	H 26		578410	318,00		U 16		578374	331,00
	TH 16		578352 R	354,00		U 18		578376	331,00
	TH 20		578358 R	354,00		U 20		578378	331,00
	TH 26		578362 R	354,00		U 25		578380	331,00
	TH 32		578364	354,00		U 26 ⁷⁾		578392	387,00
	TH 40		578624	469,00		U 32		578382	387,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00		U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00		U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00		U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00		U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 16		578374	331,00		U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 20		578378	331,00		U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	U 26 ⁷⁾		578392	387,00	TDM BRASS Serie 1700 gas	TH 16		578352 R	354,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00		TH 20		578358 R	354,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00		TH 26		578362 R	354,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00		THL 32		578368	354,00
STELBI Stelgas	TH 16		578352 R	354,00	TDM BRASS Serie 1700 gas	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20		578358 R	354,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26		578362 R	354,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00					
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00	TermoConcept TC-PRESS	Basic E 01 ²⁾		578618	620,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00					
					THERMOLUTZ	H 14		578398	318,00
						H 16		578400	318,00
						TH 20		578358 R	354,00
						TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
TE-SA TE-SA press serie 800	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
THERMACOME ACOPLEX ALU	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 32		578382	387,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
TIEMME Serie 1650 AL-COBRAPEX	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	THL 32		578368	354,00
	TH 40		578624	469,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 16		578352 R	354,00
TIEMME Serie 1650CT Serie COMPACT	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	THL 32		578368	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	THL 32		578368	354,00
TIEMME Serie 1650CTSN Serie COMPACT	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	RFz 12		578490	368,00
	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	TH 40		578624	469,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
TIEMME Serie 2650 GAS	THL 32		578368	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	THL 32		578368	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
TIGRE ALPEX GÁS	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
TRA Multi TRA+	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
TKM Systemtechnik	TH 26 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
TRA MULTITRAPRESS	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16		578374	331,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	лв.
TRA TRAPRESS	H 12		578396	318,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	RFz 12		578490	368,00
	RFz 16		578492	368,00
	RFz 20		578494	368,00
	RFz 25		578496	368,00
	RFz 32		578498	368,00
	K16/P18		578592	368,00
	K/20		578594	368,00
	K/25		578596	368,00
Tradelink TradePex Crimp Water	K32		578598	368,00
	K1/40		578600	368,00
	K16/P18		578592	368,00
	K/20		578594	368,00
	K/25		578596	368,00
	K32		578598	368,00
	K1/40		578600	368,00
	H 16		578400	318,00
	H 18		578404	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
TUBIPLAST ITALY MULTILAYER PIPE	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	TH 16		578352 R	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
TWEETOP	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 18		578376	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
U				
UNICAL AG MAX-MULTIPEX	U 16		578374	331,00
	U 20		578378	331,00
	U 26		578410	318,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
UNIDELTA DELTA PRESS	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
UNIDELTA DELTA PRESS GAS	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	U 16		578374	331,00</

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
Uponor	UP 14		578576	331,00
	UP 16		578578	331,00
	UP 20		578582	331,00
	UP 25		578584	331,00
	UP 32		578586	387,00
	U 40		578386	472,00
V				
Valsir Bravopress	B 16		578468	385,00
	B 20		578472	385,00
	B 26		578474	426,00
	B 32		578476	426,00
	F 16		578456	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	H 32 V		578602	411,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
Valsir PEXAL	H 14		578398	318,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	H 32 V		578602	411,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
Van Marcke NV SYSTEMPEX	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	M 12		578310	293,00
	M 15		578312	293,00
	M 18		578314	293,00
Van Marcke NV Tubipress	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 12 S (PR-2B)	Mini Z8	574736 R	253,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
Variotherm System TH	TH 11,6		578344	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 11,6 S (PR-2B)**	Mini Z8	574774 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
VESBO CARBON	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
VESBO INOX	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
VESBO MULTIPRESS TH-U	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 26 ⁷⁾		578392	387,00
	U 32		578382	387,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
VESBO VPREMIUM	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
Viega Fonterra	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	276,00
	VX 12		578550	408,00
Viega MegaPress	VP 14/15		578480	352,00
	VP 16/17		578482	352,00
	VP 20		578484	352,00
	VP 25		578486	352,00
	VMP ½" G (OD 21,3 mm)		578666 R	408,00
Viega MegaPress 304 FKM	VMPz ¾" (OD 26,9 mm)		578664	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Viega MegaPress 316 FKM	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Viega MegaPress CuNi (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Viega MegaPress FKM (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Viega MegaPresG (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Viega Megapress (EN) ⁴⁾	VMP ¾" (OD 17,2 mm)		578660	408,00
	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Viega MegapressS (EN) ⁴⁾	VMP ¾" (OD 17,2 mm)		578660	408,00
	VMP ½" G (OD 21,3 mm)		578666 R	408,00
	VMPz ¾" (OD 26,9 mm)		578664	408,00
Viega Pexfit	VX 16		578552	408,00
	VX 20		578554	408,00
	VX 25		578556	408,00
Viega Pexfit G	VX 16		578552	408,00
	VX 20		578554	408,00
	VX 25		578556	408,00
Viega Prestabo	V 12		578324	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
Viega Profipress	V 12		578324	293,00
	VG 14		578338	293,00
	V 15		578328	293,00
	VG 16		578340	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
Viega Profipress G	V 12		578324	293,00
	VG 14		578338	293,00
	V 15		578328	293,00
	VG 16		578340	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Viega Profipress S	V 12		578324	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Viega Profipress Therm	V 12		578324	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
Viega ProPress (ASTM) ⁵⁾	VUS ½" (OD 15,9 mm)		578566	354,00
	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1¼" (OD 34,9 mm)		578606	354,00
	VUS ½" S (PR-2B) (OD 15,9 mm)	Mini Z8	574764 R	253,00
	VUS ¾" S (PR-2B) (OD 22,2 mm)	Mini Z8	574766 R	253,00
	VUS 1" S (PR-2B) (OD 28,6 mm)	Mini Z8	574768 R	253,00
	VUS 1¼" S (PR-2B) (OD 34,9 mm)	Mini Z8	574770 R	253,00
Viega ProPress 304 FKM (ASTM) ⁵⁾	VUS ½" (OD 15,9 mm)		578566	354,00
	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1¼" (OD 34,9 mm)		578606	354,00
	VUS ½" (OD 15,9 mm)		578566	354,00
Viega ProPress 316 (ASTM) ⁵⁾	VUS ¾" (OD 22,2 mm)		578568	354,00
	VUS 1" (OD 28,6 mm)		578570	354,00
	VUS 1¼" (OD 34,9 mm)		578606	354,00
	VAU 15 (OD 12,7 mm)		578630	302,00
	VAU 20 (OD 19,1 mm)		578632	302,00
Viega Propress WATER System AUS	VAU 25 (OD 25,4 mm)		578634	302,00
	VAU 32 (OD 31,8 mm)		578636	318,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	253,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	253,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	276,00
	VAU 32 S (PR-2B) (OD 31,8 mm)	Mini Z8	574856 R	276,00
Viega PropressG GAS System AUS	VAU 15 (OD 12,7 mm)		578630	302,00
	VAU 20 (OD 19,1 mm)		578632	302,00
	VAU 25 (OD 25,4 mm)		578634	302,00
	VAU 32 (OD 31,8 mm)		578636	318,00
Viega Raxinox	VRX 16		578640	370,00
	VRX 20		578642	370,00
Viega Raxofix	VRX 16		578640	370,00
	VRX 20		578642	370,00
	VRX 25		578644	408,00
	VRX 32		578646	408,00
Viega Sanfix	VP 16/17		578482	352,00
	VP 20		578484	352,00
	VP 25		578486	352,00
	VP 32		578488	389,00
Viega Sanfix Fosta	VP 16/17		578482	352,00
	VP 20		578484	352,00
	VP 25		578486	352,00
	VP 32		578488	389,00
Viega Sanpress	V 12		578324	293,00
	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 12 S (PR-2B)	Mini Z8	574748 R	253,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Viega Sanpress Inox	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
Viega Sanpress Inox G	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Viega Smartpress	VX 16		578552	408,00
	VX 20		578554	408,00
	VX 25		578556	408,00
Viega Temponox	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
Viessmann	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
Vogel & Noot EASYTEC	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
VSH	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
> Aalberts integrated piping systems				

W				
Watts MTR Art press	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
WATTS RADIANT Watts WaterPEX	US ¾"		578534	402,00
	US ½"		578536	402,00
	US ¾"		578538	402,00
	US 1"		578540	402,00
WATTS RADIANT Watts RadiantPEX	US ¾"		578534	402,00
	US ½"		578536	402,00
	US ¾"		578538	402,00
	US 1"		578540	402,00
WATTS RADIANT Watts RadiantPEX-AL	U 16 (½")		578374	331,00
	U 20 (¾")		578378	331,00
	U 25 (¾")		578380	331,00
	U 32 (1")		578382	387,00
Wavin Tigris K5/M5	B 16		578468	385,00
	B 20		578472	385,00
	B 32		578476	426,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 25		578408	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 25		578360	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	U 25		578380	331,00
	U 32		578382	387,00
	U 40		578386	472,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	253,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	253,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	253,00
	U 32 S (PR-2B)	Mini Z8	574868 R	276,00
	UP 16		578578	331,00
	UP 20		578582	331,00
	UP 25		578584	331,00
	UP 32		578586	387,00
WEECON PRESS-C-Stahl	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00
WEECON PRESS-Edelstahl	M 15		578312	293,00
	M 18		578314	293,00
	M 22		578316	293,00
	M 28		578318	293,00
	M 35		578390	352,00
	M 15 S (PR-2B)	Mini Z8	574738 R	253,00
	M 18 S (PR-2B)	Mini Z8	574740 R	253,00
	M 22 S (PR-2B)	Mini Z8	574742 R	253,00
	M 28 S (PR-2B)	Mini Z8	574744 R	253,00
	M 35 S (PR-2B)	Mini Z8	574746 R	276,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
WEECON PRESS-Kupfer	V 15		578328	293,00
	V 18		578332	293,00
	V 22		578334	293,00
	V 28		578336	293,00
	V 35		578604	352,00
	V 15 S (PR-2B)	Mini Z8	574752 R	253,00
	V 18 S (PR-2B)	Mini Z8	574756 R	253,00
	V 22 S (PR-2B)	Mini Z8	574758 R	253,00
	V 28 S (PR-2B)	Mini Z8	574760 R	253,00
	V 35 S (PR-2B)	Mini Z8	574762 R	276,00
WEM	U 16		578374	331,00
WIELAND-WERKE cuprotherm CTX	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	253,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
WKS-Press	TH 14		578348	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
WÜRTH Würth	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	HE 32		578370 R	422,00
X				
XtraConnect	F 16		578456	337,00
	F 20		578460	337,00
	F 26		578462	365,00
	F 32		578464	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	253,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	253,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	253,00
	F 32 S (PR-2B)	Mini Z8	574734 R	276,00
	H 16		578400	318,00
	H 20		578406	318,00
	H 26		578410	318,00
	H 32		578412	318,00
	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
	U 16		578374	331,00
	U 20		578378	331,00
	(DN 26) U 25		578380	331,00
	U 32		578382	387,00
	VP 16		578482	352,00
	VP 20		578484	352,00
	VP 32		578488	389,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	лв.
Y				
YX COPPER	Yz 16 UNI		578756 R	368,00
UNIPEX Water & Gas (AUS)	Yz 20 UNI		578758 R	368,00
	Yz 25 UNI		578760 R	368,00
	Yz 32 UNI		578762 R	368,00
Z				
ZEWO THERM Zewo Press Premium	TH 12		578346	354,00
	TH 16		578352 R	354,00
	TH 17		578354	354,00
	TH 18		578356	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 40		578624	469,00
	TH 12 S (PR-2B)**	Mini Z8	574776 R	253,00
	TH 16 S (PR-2B)**		574782 R	253,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	253,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	253,00
	TH 20 S (PR-2B)**		574788 R	253,00
	TH 26 S (PR-2B)**		574794 R	253,00
ZEWO THERM Zewo Press PPSU	TH 16		578352 R	354,00
	TH 20		578358 R	354,00
	TH 26		578362 R	354,00
	TH 32		578364	354,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	253,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	253,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	253,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	276,00
ZURN	US ¾"		578534	402,00
INDUSTRIES	US ½"		578536	402,00
ZURN PEX	US ¾"		578538	402,00
	US 1"		578540	402,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For taking suitable pressing inserts.

3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

6) Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

Accessories

Description	Art.-No.	лв.
Adapter tongs Mini Z8 for driving REMS pressing rings S (PR-2B)	574700R	290,00
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516R	196,00
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704R	292,00
Steel case with insert for 8 pressing tongs Mini/ cropping tongs Mini and compartment for pipe cutter up to 42 mm	578295R	196,00
L-Boxx system case with insert for 11 pressing tongs Mini and 6 pressing rings S (PR-2B)	578659R	292,00



REMS pressing tongs Mini Set

Accessories for REMS radial presses 22 kN



Supply format

REMS pressing tongs Mini Set. REMS Mini pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**). Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Driven by all REMS radial presses 22 kN. In L-Boxx system case.

Description	Art.-No.	лв.
Set ACz 12 + 16 + 20	578081R	1 400,00
Set B 16 + 20 + 26	578074R	1 490,00
Set BMP $\frac{1}{4} + \frac{3}{8} + \frac{1}{2} + \frac{5}{8}$"	578090R	1 690,00
Set BMP $\frac{1}{4} + \frac{3}{8} + \frac{1}{2} + \frac{5}{8} + \frac{3}{4} + \frac{7}{8} + 1 + 1\frac{1}{8}$"	578091R	3 090,00
Set F 16 + 20 + 26	578072R	1 330,00
Set G 16 + 20 + 26	578073R	1 380,00
Set H 16 + 20 + 26	578077R	1 250,00
Set HA 16 + 20 + 26	578078R	1 530,00
Set M 15 + 18 + 22 + 28	578059R	1 470,00
Set M 15 + 18 + 22 + 28 + 35	578055R	1 820,00
Set M 15 + 22 + 28 + 35	578057R	1 530,00
Set RFz 12 + 16 + 20	578079R	1 400,00
Set RFz 16 + 20 + 25	578075R	1 400,00
Set RN 16 + 20 + 25	578076R	1 290,00
Set TH 16 + 20 + 26	578069R	1 360,00
Set U 16 + 20 + 25	578070R	1 290,00
Set UP 16 + 20 + 25	578071R	1 290,00
Set V 14 + 16 + 22 + 28	578067R	1 470,00
Set V 15 + 18 + 22 + 28	578060R	1 470,00
Set V 15 + 18 + 22 + 28 + 35	578056R	1 820,00
Set V 15 + 22 + 28 + 35	578058R	1 530,00
Set VG 14 + 16, V 22 + 28	578068R	1 470,00
Set VMP $\frac{3}{8} + \frac{1}{2} + \frac{3}{4}$"	578901R	1 520,00
Set VP 16 + 20 + 25	578095R	1 350,00
Set VRX 16 + 20 + 25	578094R	1 440,00

REMS pressing rings S Set

Accessories for REMS radial presses 22 kN



Supply format

REMS pressing rings S Set Mini Z8. REMS pressing rings S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Adapter tongs Mini Z8 for driving by all REMS radial presses 22 kN.

Description	Art.-No.	лв.
REMS pressing rings S Set Mini Z8 in sturdy steel case		
F 16 + 20 + 26	574620R	1 250,00
M 15 + 18 + 22	574614R	1 250,00
M 15 + 22 + 28	574618R	1 250,00
TH 16 + 20 + 26	574622R	1 250,00
U 16 + 20 + 25	574634R	1 250,00
U 16 + 20 + 26	574636R	1 250,00
V 15 + 18 + 22	574612R	1 250,00
V 15 + 22 + 28	574616R	1 250,00
REMS pressing rings S Set Mini Z8 in L-Boxx system case		
BMP 6 + 8 + 10 + 12 + 15 + 16 + 18 + 22 + 28	574624R	2 860,00
BMP $\frac{1}{4} + \frac{3}{8} + \frac{1}{2} + \frac{5}{8} + \frac{3}{4} + \frac{7}{8}$ "	574632R	2 000,00
M 12 + 15 + 18 + 22 + 28 + 35	574626R	2 120,00
V 12 + 15 + 18 + 22 + 28 + 35	574628R	2 120,00
V 12 + 14 + 15 + 16 + 18 + 22 + 28 + 35	574630R	2 630,00

Robust, universal pressing tongs Mini Basic E01 for interchangeable pressing inserts, for pressing connection material for electric cables.

Pipe pressing joints	≤ 300 mm ²
For Klauke pressing inserts Series 22, narrow pressing	

REMS pressing tongs Mini Basic E01 – universal up to 300 mm².


Highly durable pressing tongs made of tenacious, specially hardened special steel. Locating pin integrated into the pressing jaws and additional snap positioning for secure seating and fast, easy changing of the pressing inserts.

Driven by all REMS radial presses 22 kN

For pressing connection material for electric cables, in connection with suitable, interchangeable Klauke pressing inserts Series 22, narrow pressing:

R 22 (6–300 mm²), IS 22 (10–150 mm²), F 22 (10–70 mm²), M 22 (1.5–16 mm²), N 22 (10–50 mm²), D 22 (6–300 mm²), DP 22 (2 × 70 mm²), Q 22 (10–70 mm²), ISQ 22 (10–70 mm²), RU 22 (10–300 mm²), A 22 (10–300 mm²), C 22/MC 22 (16–70 mm²), H 22 (70 mm²), AE 2213 (25–240 mm²).

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

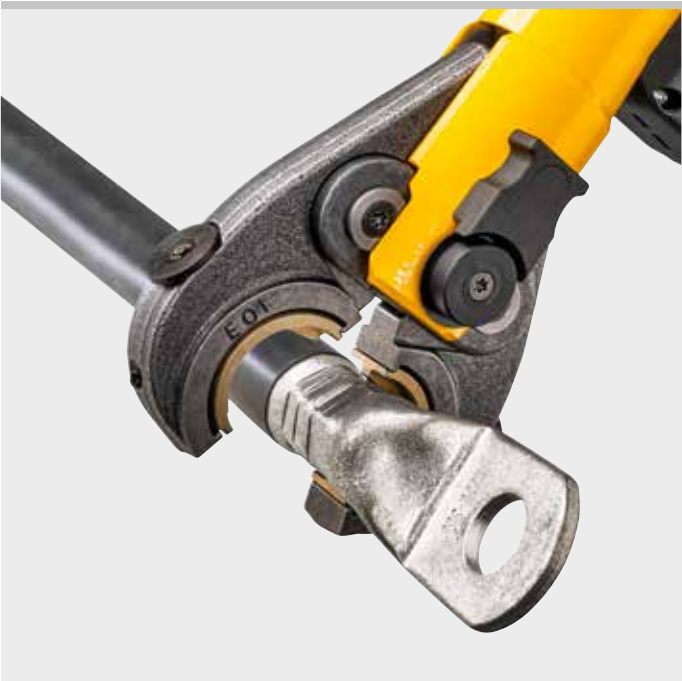

German Quality Product



Supply format

REMS pressing tongs Mini Basic E01. Robust, universal pressing tongs for pressing connection material for electric cables. For Klauke pressing inserts Series 22, narrow pressing. Without pressing inserts. In a carton.

	Art.-No.	лв.
	578618	620,00

