

for all common pressfitting systems

Select REMS pressing tongs Mini/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the REMS pressing tongs Mini/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Can be driven by all REMS radial presses 22 kN. Adapter tongs (page 195) required for driving REMS pressing rings. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press (page 199) using the adapter tong Z8.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs Mini (PZ-2B)

REMS Mini pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

REMS Mini ACz, Fz, HEz, RFz, RFlz pressing tongs with teeth prevent formation of burr on the pressfitting (**Patent EP 2 027 971**).

REMS pressing tongs Mini GFF

REMS pressing tongs Mini GFFb, especially for the Geberit FlowFit press fitting system. Only one pressing tongs for sizes Ø 16, 20, 25, 32 and 40 mm. With colour coding for fast, easy selection of the suitable pressing tongs for the appropriate press fitting.

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 195.

Traceability according to EN 1775:2007

REMS pressing tongs Mini with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.



Patent EP 1 952 948
Patent EP 2 347 862

German Quality Product



REMS Mini pressing tongs (PZ-2B)



REMS pressing ring S (PR-2B),
continuously swivellable



REMS pressing tongs Mini GFF

Confirmation of suitability

See page 259.

Hold-Harmless and Indemnification Agreement

See page 260.





Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs Mini V: "V" imprint on pressed fitting for traceability according to EN 1775:2007

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
A				
Aalberts integrated piping systems VSH MultiPress	U 14		578372	360,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 14 S (PR-2B)**	Mini Z8	574858 R	261,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
Aalberts integrated piping systems VSH MultiPress Gas	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 16 S (PR-2B)	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)	Mini Z8	574864 R	261,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 16 S (PR-2B)	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)	Mini Z8	574788 R	261,00
Aalberts integrated piping systems VSH SudoPress Carbon	V 12		578324	303,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Aalberts integrated piping systems VSH SudoPress Copper	V 12		578324	303,00
	V 14		578326	303,00
	VG 14		578338	303,00
	V 15		578328	303,00
	V 16		578330	303,00
	VG 16		578340	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 14 S (PR-2B)	Mini Z8	574800 R	261,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 16 S (PR-2B)	Mini Z8	574802 R	261,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
Aalberts integrated piping systems VSH SudoPress Stainless	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Aalberts integrated piping systems VSH XPress Carbon	M 12		578310	303,00
	M 15		578312	303,00
	M 18 ^U		578314	303,00
	M 22		578316	303,00
	M 28 ^U		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Aalberts integrated piping systems VSH XPress Copper	M 12		578310	303,00
	M 15		578312	303,00
	M 18 ^U		578314	303,00
	M 22		578316	303,00
	M 28 ^U		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Aalberts integrated piping systems VSH XPress Copper Gas	M 15		578312	303,00
	M 18 ^U		578314	303,00
	M 22		578316	303,00
	M 28 ^U		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Aalberts integrated piping systems VSH XPress Stainless	M 15		578312	303,00
	M 18 ^U		578314	303,00
	M 22		578316	303,00
	M 28 ^U		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Aalberts integrated piping systems VSH XPress Stainless Gas	M 15		578312	303,00
	M 18 ^U		578314	303,00
	M 22		578316	303,00
	M 28 ^U		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
AC-FIX PRESS (Global Piping Systems)	H 12		578396	329,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	RFz 12		578490	381,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
AC-FIX PRESS DUO (Global Piping Systems)	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	VX 16		578552	421,00
	VX 20		578554	421,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
AC-FIX PRESS DUO (Global Piping Systems)	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16		578400	329,00	AIRBEL PRESSCLIM	M 15		578312	303,00
	H 18		578404	329,00		M 18		578314	303,00
	H 20		578406	329,00		M 22		578316	303,00
	H 25		578408	329,00		M 28		578318	303,00
	H 32		578412	329,00		M 35		578390	364,00
	RFz 16		578492	381,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	RFz 20		578494	381,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	RFz 25		578496	381,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	RFz 32		578498	381,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	U 16		578374	342,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	U 18		578376	342,00	AIRBEL SERTINOX	M 15		578312	303,00
	U 20		578378	342,00		M 18		578314	303,00
	U 25		578380	342,00		M 22		578316	303,00
	U 32		578382	400,00		M 28		578318	303,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		M 35		578390	364,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
ACOME MT	ACz 12		578608	381,00	M 35 S (PR-2B)	Mini Z8	574746 R	286,00	
	ACz 16		578610	381,00	ALB Sistema Multicapa para calefacción y sanitario	TH 16		578352 R	365,00
	ACz 20		578612	381,00		TH 18		578356	365,00
	ACz 25		578614	381,00		TH 20		578358 R	365,00
AHLSELL A-press elförzinkad M	M 12		578310	303,00		TH 26		578362 R	365,00
	M 15		578312	303,00		TH 32		578364	365,00
	M 18		578314	303,00		TH 40		578624	485,00
	M 22		578316	303,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	M 28		578318	303,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	M 35		578390	364,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		H 16		578400	329,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		H 18		578404	329,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		H 20		578406	329,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		H 26		578410	329,00
AHLSELL A-press elförzinkad V	V 12		578324	303,00		H 32		578412	329,00
	V 15		578328	303,00		U 16		578374	342,00
	V 18		578332	303,00		U 18		578376	342,00
	V 22		578334	303,00		U 20		578378	342,00
	V 28		578336	303,00		U 26 ¹⁾		578392	400,00
	V 35		578604	364,00		U 32		578382	400,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		U 40		578386	488,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00		U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
AHLSELL A-press koppar M	M 12		578310	303,00	ALB Sistema Multicapa para gas	TH 16		578352 R	365,00
	M 15		578312	303,00		TH 20		578358 R	365,00
	M 18		578314	303,00		TH 26		578362 R	365,00
	M 22		578316	303,00		TH 32		578364	365,00
	M 28		578318	303,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	M 35		578390	364,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		H 16		578400	329,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		H 20		578406	329,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		H 26		578410	329,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		H 32		578412	329,00
AHLSELL A-press koppar V	V 12		578324	303,00		U 16		578374	342,00
	V 15		578328	303,00		U 20		578378	342,00
	V 18		578332	303,00		U 26 ¹⁾		578392	400,00
	V 22		578334	303,00		U 32		578382	400,00
	V 28		578336	303,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	V 35		578604	364,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00	ALTECH Altech	RFz 12		578490	381,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		RFz 16		578492	381,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		RFz 20		578494	381,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		RFz 25		578496	381,00
AHLSELL A-press rostfritt	M 15		578312	303,00	APE MULTYGAS Serie AP Gas	TH 16		578352 R	365,00
	M 18		578314	303,00		TH 20		578358 R	365,00
	M 22		578316	303,00		TH 26		578362 R	365,00
	M 28		578318	303,00		TH 32		578364	365,00
	M 35		578390	364,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00	ALB Sistema Multicapa para gas	TH 16		578352 R	365,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		TH 20		578358 R	365,00

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
APE Serie AP	B 16		578468	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
APE Serie APL	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
AQUATECHNIK Press-fitting metal	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
AQUATECHNIK Universal	B 16		578468	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
ARKA DURSystem	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
ARKA System Calido	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
ARKA System Calido Gas	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	261,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
Ascht NIR	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
ASSOTHERM IPC-RAC Carbon Steel	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
ASSOTHERM IPI-RAX Inox	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
ASSOTHERM IPI-RAX Inox Gas	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
ASSOTHERM IPM-Multistrato	H 16		578400	329,00	AYOR FIXOCONNECT Press	H 12		578396	329,00
	H 20		578406	329,00		H 16		578400	329,00
	H 26		578410	329,00		H 20		578406	329,00
	H 32		578412	329,00		H 25		578408	329,00
	TH 16		578352 R	365,00		RFz 12		578490	381,00
	TH 20		578358 R	365,00		RFz 16		578492	381,00
	TH 26		578362 R	365,00		RFz 20		578494	381,00
	TH 32		578364	365,00		RFz 25		578496	381,00
	THL 32		578368	365,00		U 16		578374	342,00
	TH 40		578624	485,00		U 20		578378	342,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		U 25		578380	342,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00	AYOR FIXOMULTIX	H 16		578400	329,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		H 20		578406	329,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		H 26		578410	329,00
	U 16		578374	342,00		H 32		578412	329,00
	U 20		578378	342,00		TH 16		578352 R	365,00
	U 26 ¹⁾		578392	400,00		TH 20		578358 R	365,00
	U 32		578382	400,00		TH 26		578362 R	365,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		TH 32		578364	365,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
ASSOTHERM IPR-RRR Copper	M 15		578312	303,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	M 18		578314	303,00		U 16		578374	342,00
	M 22		578316	303,00		U 20		578378	342,00
	M 28		578318	303,00		U 26 ¹⁾		578392	400,00
	M 35		578390	364,00		U 32		578382	400,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		U 40		578386	488,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00	AYOR SOMATHERM FOR YOU -1	H 16		578400	329,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		H 20		578406	329,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		H 26		578410	329,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		TH 16		578352 R	365,00
ASSOTHERM IPR-RRR Copper Gas	M 15		578312	303,00		TH 20		578358 R	365,00
	M 18		578314	303,00		TH 26		578362 R	365,00
	M 22		578316	303,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	M 28		578318	303,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 35		578390	364,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		U 16		578374	342,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		U 20		578378	342,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		U 26 ¹⁾		578392	400,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00	AYOR SOMATHERM FOR YOU -2	H 12		578396	329,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		H 16		578400	329,00
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ¾"		578534	415,00		H 20		578406	329,00
	US ½"		578536	415,00		H 25		578408	329,00
	US ¾"		578538	415,00		RFz 12		578490	381,00
	US 1"		578540	415,00		RFz 16		578492	381,00
ATUSA ITALIA INSTALPRESS CARBON STEEL PRESS FITTINGS	M 15		578312	303,00		RFz 20		578494	381,00
	M 18		578314	303,00		RFz 25		578496	381,00
	M 22		578316	303,00		U 16		578374	342,00
	M 28		578318	303,00		U 20		578378	342,00
	M 35		578390	364,00		U 25		578380	342,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00	B				
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00	Bampi BALPEX serie LP	TH 16		578352 R	365,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		TH 18		578356	365,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		TH 20		578358 R	365,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		TH 26		578362 R	365,00
ATUSA ITALIA INSTALPRESS STAINLESS STEEL PRESS FITTINGS	M 15		578312	303,00		TH 32		578364	365,00
	M 18		578314	303,00		TH 40		578624	485,00
	M 22		578316	303,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	M 28		578318	303,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	M 35		578390	364,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		U 16		578374	342,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		U 18		578376	342,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		U 20		578378	342,00
AUSTEC PEX-B, PEX-AL-PEX (AUS)	TH 16		578352 R	365,00		U 26 ¹⁾		578392	400,00
	TH 20		578358 R	365,00	Bampi BALPEX serie MP	U 32		578382	400,00
	TH 25		578360	365,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	TH 32		578364	365,00		U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 16		578374	342,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 20		578378	342,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 25		578380	342,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 32		578382	400,00		TH 16		578352 R	365,00
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16		578352 R	365,00		TH 18		578356	365,00
	TH 20		578358 R	365,00		TH 20		578358 R	365,00
	TH 25		578360	365,00		TH 26		578362 R	365,00
	TH 32		578364	365,00		TH 32		578364	365,00
	U 16		578374	342,00		TH 40		578624	485,00
	U 20		578378	342,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	U 25		578380	342,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	U 32		578382	400,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Bampi BALPEX Gas	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
BARBI EASYPRESS (Industrial Blansol)	H 12		578396	329,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	Rfz 12		578490	381,00
	Rfz 16		578492	381,00
	Rfz 20		578494	381,00
	Rfz 25		578496	381,00
	Rfz 32		578498	381,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
BARBI MULTIPLEX (Industrial Blansol)	H 14		578398	329,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	Rfz 16		578492	381,00
	Rfz 18		578638	381,00
	Rfz 20		578494	381,00
	Rfz 25		578496	381,00
	Rfz 32		578498	381,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
BEGETUBE/ IVAR	B 14		578466	398,00
	B 16		578468	398,00
	B 18		578470	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
Béné inox Série 41	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Brass Form Master-Al-Pex	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
Brass & Fittings PRESSMAN MultiPress	Rfz 16		578492	381,00
	Rfz 18		578638	381,00
	ACz 20		578612	381,00
	Rfz 25		578496	381,00
	Rfz 32		578498	381,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Brass & Fittings PRESSMAN RetiPress	Rfz 16		578492	381,00
	Rfz 18		578638	381,00
	ACz 20		578612	381,00
	Rfz 25		578496	381,00
	Rfz 32		578498	381,00
BRASSTECH MULTItermoSAN Brasspress	B 16		578468	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
C	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
Cello Products -Press	VUS ½" (OD 15,9 mm)		578566	365,00
	VUS ¾" (OD 22,2 mm)		578568	365,00
	VUS 1" (OD 28,6 mm)		578570	365,00
	VUS 1¼" (OD 34,9 mm)		578606	365,00
CGR DYNAFLU multicouche	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
CGR DYNAFLU PER	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 40		578386	488,00
	H 12		578396	329,00
	H 16		578400	329,00
CHIALI CHIALIPEX	H 20		578406	329,00
	H 25		578408	329,00
	Rfz 12		578490	381,00
	Rfz 16		578492	381,00
	Rfz 20		578494	381,00
	Rfz 25		578496	381,00
Chialitrix Chialitrix Rhinopex	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	H 16		578400	329,00
	H 20		578406	329,00
	U 16		578374	342,00
	U 20		578378	342,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
Climatrix	TH 11,6		578344	365,00	COMISA	TH 16		578352 R	365,00
Variotherm	TH 16		578352 R	365,00	Press System Gas	TH 20		578358 R	365,00
System TH	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		TH 26		578362 R	365,00
ClouSet	TH 16		578352 R	365,00		TH 32		578364	365,00
	TH 18		578356	365,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20		578358 R	365,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00					
Comap	RFz 12		578490	381,00	CONEL	M 15		578312	303,00
PEX Press	RFz 16		578492	381,00	CONNECT INOX	M 18		578314	303,00
	RFz 20		578494	381,00		M 22		578316	303,00
	RFz 25		578496	381,00		V 15		578328	303,00
Comap	TH 14		578348	365,00		V 18		578332	303,00
Multiskin	TH 16		578352 R	365,00		V 22		578334	303,00
	TH 18		578356	365,00	CONEL	F 16		578456	348,00
	TH 20		578358 R	365,00	CONNECT	F 20		578460	348,00
	TH 26		578362 R	365,00	MULTI	F 26		578462	377,00
	TH 32		578364	365,00		F 32		578464	377,00
	THL 32		578368	365,00		F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	TH 40		578624	485,00		F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		H 16		578400	329,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		H 20		578406	329,00
	U 14		578372	360,00		H 26		578410	329,00
	U 16		578374	342,00		H 32		578412	329,00
	U 18		578376	342,00		TH 16		578352 R	365,00
	U 20		578378	342,00		TH 20		578358 R	365,00
	U 32		578382	400,00		TH 26		578362 R	365,00
	H 14		578398	329,00		TH 32		578364	365,00
	H 16		578400	329,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	H 18		578404	329,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	H 20		578406	329,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	H 26		578410	329,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	H 32		578412	329,00		U 16		578374	342,00
Comap	TH 16		578352 R	365,00	(DN 26)	U 20		578378	342,00
Multiskin Gas	TH 20		578358 R	365,00		U 25		578380	342,00
	TH 26		578362 R	365,00		U 32		578382	400,00
	TH 32		578364	365,00		VP 16		578482	364,00
	THL 32		578368	365,00		VP 20		578484	364,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		VP 32		578488	402,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00	CONEL	F 16		578456	348,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00	CONNECT	F 20		578460	348,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00	MV2	F 26		578462	377,00
	U 16		578374	342,00		F 32		578464	377,00
	U 20		578378	342,00		F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	U 32		578382	400,00		F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	H 16		578400	329,00		F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	H 20		578406	329,00		F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	H 26		578410	329,00		TH 16		578352 R	365,00
	H 32		578412	329,00		TH 20		578358 R	365,00
COMISA	TH 14		578348	365,00		TH 26		578362 R	365,00
Press System	TH 16		578352 R	365,00		TH 32		578364	365,00
	TH 18		578356	365,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20		578358 R	365,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25		578360	365,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 26		578362 R	365,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	TH 32		578364	365,00					
	TH 40		578624	485,00	Conex Bänninger	M 15		578312	303,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00	<A> Press Inox	M 18		578314	303,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00	(304)	M 22		578316	303,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00		M 28		578318	303,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		M 35		578390	364,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	H 14		578398	329,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	H 16		578400	329,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	H 18		578404	329,00	Conex Bänninger	M 15		578312	303,00
	H 20		578406	329,00	<A> Press Inox	M 18		578314	303,00
	H 26		578410	329,00	(316L)	M 22		578316	303,00
	H 32		578412	329,00		M 28		578318	303,00
	B 14		578466	398,00		M 35		578390	364,00
	B 16		578468	398,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	B 18		578470	398,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	B 20		578472	398,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	B 26		578474	441,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	B 32		578476	441,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Conex Bänninger >B< Flex	F 16		578456	348,00
	F 18		578458	348,00
	F 20		578460	348,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	RFz 16		578492	381,00
	RFz 18		578638	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
Conex Bänninger >B< Flex Gas	F 16		578456	348,00
	F 18		578458	348,00
	F 20		578460	348,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	RFz 16		578492	381,00
	RFz 18		578638	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
Conex Bänninger >B< MaxiPro	BMP ¼"		578700	362,00
	BMP ⅜"		578702	362,00
	BMP ½"		578704	362,00
	BMP ⅝"		578706	362,00
	BMP ¾"		578708	362,00
	BMP ⅞"		578710	362,00
	BMP 1"		578712	362,00
	BMP 1½"		578714	362,00
Conex Bänninger >B< Press EN ⁽⁴⁾	V 12		578324	303,00
	V 14		578326	303,00
	V 15		578328	303,00
	V 16		578330	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 14 S (PR-2B)	Mini Z8	574800 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 16 S (PR-2B)	Mini Z8	574802 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Conex Bänninger >B< Press Carbon EN ⁽⁴⁾	M 15		578312	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	V 15		578328	303,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Conex Bänninger >B< Press Gas EN ⁽⁴⁾	V 12		578324	303,00
	V 14		578326	303,00
	V 15		578328	303,00
	V 16		578330	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 14 S (PR-2B)	Mini Z8	574800 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 16 S (PR-2B)	Mini Z8	574802 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Conex Bänninger >B< Press Inox EN ⁽⁴⁾	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Conex Bänninger >B< Press Solar	V 12		578324	303,00
	V 14		578326	303,00
	V 15		578328	303,00
	V 16		578330	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 14 S (PR-2B)	Mini Z8	574800 R	261,00
D				
Debrunner Acifer d-a Presssystem C-Stahl	M 12		578310	303,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
DUOPIPE SYSTEMS DUOFIL MKSYSTEM	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
DW Verbundrohr multitubo systems	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
E				
EBRILLE Isomonflex	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁽⁷⁾		578392	400,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	H 26		578410	329,00
	TH 26		578362 R	365,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
EBRILLE Moniflex	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁽⁷⁾		578392	400,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
EFFEBI	M 15		578312	303,00	EFFEBI	V 12		578324	303,00
EFFEBI-PRESS	M 18		578314	303,00	EFFEBI-PRESS	V 15		578328	303,00
Aisi316	M 22		578316	303,00	UNICO	V 18		578332	303,00
System M Profile ¹⁾	M 28		578318	303,00	(GAS)	V 22		578334	303,00
	M 35		578390	364,00		V 28		578336	303,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		V 35		578604	364,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
						V 28 S (PR-2B)	Mini Z8	574760 R	261,00
EFFEBI	V 12		578324	303,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
EFFEBI-PRESS	V 15		578328	303,00	EFFEBI	M 15		578312	303,00
Aisi316	V 18		578332	303,00	PRESSTIGE	M 18		578314	303,00
System V Profile	V 22		578334	303,00		M 22		578316	303,00
	V 28		578336	303,00		M 28		578318	303,00
	V 35		578604	364,00		M 35		578390	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		V 15		578328	303,00
EFFEBI	M 12		578310	303,00		V 18		578332	303,00
EFFEBI-PRESS	M 15		578312	303,00		V 22		578334	303,00
Carbon-S	M 18		578314	303,00		V 28		578336	303,00
System M Profile ¹⁾	M 22		578316	303,00		V 35		578604	364,00
	M 28		578318	303,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	M 35		578390	364,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00	EFFEBI	M 15		578312	303,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00	PRESSTIGE 4E05	M 18		578314	303,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		M 22		578316	303,00
						M 28		578318	303,00
EFFEBI	V 12		578324	303,00		M 35		578390	364,00
EFFEBI-PRESS	V 15		578328	303,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
Carbon-S	V 18		578332	303,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
System V Profile	V 22		578334	303,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	V 28		578336	303,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	V 35		578604	364,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00	EFFEBI	M 15		578312	303,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00	PRESSTIGE-GAS	M 18		578314	303,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00		M 22		578316	303,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		M 28		578318	303,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		M 35		578390	364,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
EFFEBI	V 12		578324	303,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
EFFEBI-PRESS	V 14		578326	303,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
COPPER	VG 14		578338	303,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	V 15		578328	303,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 16		578330	303,00		V 15		578328	303,00
	VG 16		578340	303,00		V 18		578332	303,00
	V 18		578332	303,00		V 22		578334	303,00
	V 22		578334	303,00		V 28		578336	303,00
	V 28		578336	303,00		V 35		578604	364,00
	V 35		578604	364,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 14 S (PR-2B)	Mini Z8	574800 R	261,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	261,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	V 16 S (PR-2B)	Mini Z8	574802 R	261,00	EFFEBI	TH 16		578352 R	365,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	261,00	TOF-GAS	TH 20		578358 R	365,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00	MULTIPINZA	TH 26		578362 R	365,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		TH 32		578364	365,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
EFFEBI	V 12		578324	303,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
EFFEBI-PRESS	V 15		578328	303,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
UNICO	V 18		578332	303,00		H 16		578400	329,00
	V 22		578334	303,00		H 20		578406	329,00
	V 28		578336	303,00		H 26		578410	329,00
	V 35		578604	364,00		H 32		578412	329,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		U 16		578374	342,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		U 20		578378	342,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00		U 26 ⁷⁾		578392	400,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		U 32		578382	400,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
						U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
						U 32 S (PR-2B)	Mini Z8	574868 R	286,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
EFFEBI TOF MULTIPINZA	TH 16		578352 R	365,00	EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		578310	303,00
	TH 18		578356	365,00		M 15		578312	303,00
	TH 20		578358 R	365,00		M 18		578314	303,00
	TH 25		578360	365,00		M 22		578316	303,00
	TH 26		578362 R	365,00		M 28		578318	303,00
	TH 32		578364	365,00		M 35		578390	364,00
	TH 40		578624	485,00		M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00	EUROTUBI EUROPA Inox Pressfitting System M-Profile ¹⁾	M 15		578312	303,00
	F 16		578456	348,00		M 18		578314	303,00
	F 18		578458	348,00		M 22		578316	303,00
	F 20		578460	348,00		M 28		578318	303,00
	F 26		578462	377,00		M 35		578390	364,00
	F 32		578464	377,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	Fz 40		578478	503,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	286,00	Evans Components Presslok	VAU 15 (½") (OD 12,7 mm)		578630	313,00
	H 16		578400	329,00		VAU 20 (¾") (OD 19,1 mm)		578632	313,00
	H 18		578404	329,00		VAU 25 (1") (OD 25,4 mm)		578634	313,00
	H 20		578406	329,00	F				
	H 25		578408	329,00	FAR Rubinetterie PRESSFAR	TH 14		578348	365,00
	H 26		578410	329,00		TH 16		578352 R	365,00
	H 32		578412	329,00		TH 17		578354	365,00
	U 16		578374	342,00		TH 18		578356	365,00
	U 18		578376	342,00		TH 20		578358 R	365,00
	U 20		578378	342,00		TH 25		578360	365,00
	U 25		578380	342,00		TH 26		578362 R	365,00
	U 26 ⁷⁾		578392	400,00		TH 32		578364	365,00
	U 32		578382	400,00		TH 40		578624	485,00
	U 40		578386	488,00		TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	B 16		578468	398,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	B 18		578470	398,00		H 14		578398	329,00
	B 20		578472	398,00		H 16		578400	329,00
	B 26		578474	441,00		H 18		578404	329,00
	B 32		578476	441,00		H 20		578406	329,00
EFIELD MULTILAYER PRESS DINGAS	U 16		578374	342,00		H 26		578410	329,00
	U 18		578376	342,00		H 32		578412	329,00
	U 20		578378	342,00		U 14		578372	360,00
	U 25		578380	342,00		U 16		578374	342,00
	U 32		578382	400,00		U 18		578376	342,00
EFIELD MULTILAYER PRESS WATER	U 16		578374	342,00		U 20		578378	342,00
	U 18		578376	342,00		U 25		578380	342,00
	U 20		578378	342,00		U 32		578382	400,00
	U 25		578380	342,00	Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	U 14		578372	360,00
	U 32		578382	400,00		U 16		578374	342,00
	U 16		578374	342,00		U 18		578376	342,00
	U 18		578376	342,00		U 20		578378	342,00
	U 20		578378	342,00		U 25		578380	342,00
	U 25		578380	342,00		U 32		578382	400,00
	U 32		578382	400,00		U 26 ⁷⁾		578392	400,00
	VUS ½" (OD 15,9 mm)		578566	365,00		U 32		578382	400,00
	VUS ¾" (OD 22,2 mm)		578568	365,00		U 40		578386	488,00
	VUS 1" (OD 28,6 mm)		578570	365,00		U 14 S (PR-2B)**	Mini Z8	574858 R	261,00
	VUS 1½" (OD 34,9 mm)		578606	365,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
EMMETI GERPEX- FIVPRESS	B 16		578468	398,00		U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	B 20		578472	398,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	B 26		578474	441,00		U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	B 32		578476	441,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	F 16		578456	348,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	F 20		578460	348,00	F.B.Q. BARONIO BQ PRESS SOLAR	V 12		578324	303,00
	H 16		578400	329,00		V 14		578326	303,00
	H 20		578406	329,00		VG 14		578338	303,00
	TH 16		578352 R	365,00		V 15		578328	303,00
	TH 20		578358 R	365,00		V 16		578330	303,00
	TH 26		578362 R	365,00		VG 16		578340	303,00
	TH 32		578364	365,00		V 18		578332	303,00
	TH 40		578624	485,00		V 22		578334	303,00
	U 16		578374	342,00		V 28		578336	303,00
	U 20		578378	342,00		V 35		578604	364,00
EMPUR	TH 14		578348	365,00		V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	TH 15		578350	365,00		V 14 S (PR-2B)	Mini Z8	574800 R	261,00
	TH 16		578352 R	365,00		VG 14 S (PR-2B)	Mini Z8	574750 R	261,00
	TH 17		578354	365,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	TH 20		578358 R	365,00		V 16 S (PR-2B)	Mini Z8	574802 R	261,00
	TH 25		578360	365,00		VG 16 S (PR-2B)	Mini Z8	574754 R	261,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	TH 15 S (PR-2B)**	Mini Z8	574780 R	261,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Esta Rohr simplesta SH M	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00	F.B.Q. BARONIO BQ PRESS WATER	V 12		578324	303,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		V 14		578326	303,00
	M 15		578312	303,00		VG 14		578338	303,00
	M 18		578314	303,00		V 15		578328	303,00
	M 22		578316	303,00		V 16		578330	303,00
	M 28		578318	303,00		VG 16		578340	303,00
	M 35		578390	364,00		V 18		578332	303,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		V 22		578334	303,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		V 28		578336	303,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		V 35		578604	364,00
Esta Rohr simplesta ST M	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		V 14 S (PR-2B)	Mini Z8	574800 R	261,00
	M 15		578312	303,00		VG 14 S (PR-2B)	Mini Z8	574750 R	261,00
	M 18		578314	303,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	M 22		578316	303,00		V 16 S (PR-2B)	Mini Z8	574802 R	261,00
	M 28		578318	303,00		VG 16 S (PR-2B)	Mini Z8	574754 R	261,00
	M 35		578390	364,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
F.B.Q. BARONIO BQ PRESS GAS	V 12		578324	303,00	FERRO systems BRASELI GPF PPSU Pressfitting PEX y MULTICAPA	U 16		578374	342,00
	V 14		578326	303,00		U 18		578376	342,00
	VG 14		578338	303,00		U 20		578378	342,00
	V 15		578328	303,00		U 25		578380	342,00
	V 16		578330	303,00		U 32		578382	400,00
	VG 16		578340	303,00		U 40		578386	488,00
	V 18		578332	303,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	V 22		578334	303,00		U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	V 28		578336	303,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	V 35		578604	364,00		U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		U 32 S (PR-2B)**	Mini Z8	574868 R	286,00
	V 14 S (PR-2B)	Mini Z8	574800 R	261,00	FERRO systems BRASELI GPF PRESS Pressfitting PEX FILINOX Instalpress Steel	RFz 16		578492	381,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	261,00		RFz 20		578494	381,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		RFz 25		578496	381,00
	V 16 S (PR-2B)	Mini Z8	574802 R	261,00		RFz 32		578498	381,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	261,00		M 15		578312	303,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00		M 18		578314	303,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		M 22		578316	303,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		M 28		578318	303,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		M 35		578390	364,00
FERCOFLOOR DUO Press FERCO PEX	RFz 16		578492	381,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	RFz 20		578494	381,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	RFz 25		578496	381,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	RFz 32		578498	381,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	TH 16		578352 R	365,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	TH 20		578358 R	365,00	FILINOX Instalpress Inox	M 15		578312	303,00
	TH 25		578360	365,00		M 18		578314	303,00
	TH 32		578364	365,00		M 22		578316	303,00
	TH 40		578624	485,00		M 28		578318	303,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		M 35		578390	364,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
FERCOFLOOR DUO Press MULTIFER	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00	FITTINGS ESTÁNDAR ECO-PRESS	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	RFz 16		578492	381,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	RFz 20		578494	381,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	RFz 25		578496	381,00		RFz 16		578492	381,00
	RFz 32		578498	381,00		RFz 20		578494	381,00
	TH 16		578352 R	365,00	FITTINGS ESTÁNDAR MULTICAPA	RFz 25		578496	381,00
	TH 20		578358 R	365,00		RFz 32		578498	381,00
	TH 25		578360	365,00		RFz 16		578492	381,00
	TH 32		578364	365,00		RFz 18		578638	381,00
	TH 40		578624	485,00		RFz 20		578494	381,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		RFz 25		578496	381,00
FERRO systems BRASELI GPF GAS	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		RFz 32		578498	381,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00	FITTINGS ESTÁNDAR PE-X	RFz 16		578492	381,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		RFz 20		578494	381,00
	U 16		578374	342,00		RFz 25		578496	381,00
	U 18		578376	342,00		RFz 32		578498	381,00
	U 20		578378	342,00	FORNARA ForPress	RFz 16		578492	381,00
	U 25		578380	342,00		RFz 20		578494	381,00
	U 32		578382	400,00		RFz 25		578496	381,00
	U 40		578386	488,00		RFz 32		578498	381,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		B 16		578468	398,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		B 20		578472	398,00
FERRO systems BRASELI GPF MULT Pressfitting MULTICAPA	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		B 26		578474	441,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		B 32		578476	441,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		F 16		578456	348,00
	TH 16		578352 R	365,00		F 20		578460	348,00
	TH 20		578358 R	365,00		F 26		578462	377,00
	TH 25		578360	365,00		F 32		578464	377,00
	TH 32		578364	365,00		F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		H 16		578400	329,00
	U 16		578374	342,00		H 20		578406	329,00
	U 18		578376	342,00		H 26		578410	329,00
	U 20		578378	342,00		H 32		578412	329,00
	U 25		578380	342,00		TH 16		578352 R	365,00
	U 32		578382	400,00		TH 20		578358 R	365,00
	U 40		578386	488,00		TH 26		578362 R	365,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		TH 32		578364	365,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
FORZA WATER CRIMP (AUS)	K16/P18		578592	381,00
	K/20		578594	381,00
	K/25		578596	381,00
	K32		578598	381,00
	K1/40		578600	381,00
FORZA STAINLESS WATER CRIMP	K16/P18		578592	381,00
	K/20		578594	381,00
FORZA STESSO PEX WATER AND GAS CRIMP AUS)	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
FORZA GAS CRIMP (AUS)	K16/P18		578592	381,00
	K/20		578594	381,00
	K/25		578596	381,00
	K32		578598	381,00
	K1/40		578600	381,00
FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)		578630	313,00
	VAU 20 (OD 19,1 mm)		578632	313,00
	VAU 25 (OD 25,4 mm)		578634	313,00
	VAU 32 (OD 31,8 mm)		578636	329,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	261,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	261,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	286,00
FORZA STAINLESS V PRESS (AUS)	V 15		578328	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
FRABO	> Rubinetterie Bresciane Bonomi			
Fränkische alpex-duo XS	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
Fränkische alpex F50 PROFi	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	VP 16		578482	364,00
	VP 20		578484	364,00
	VP 32		578488	402,00
Fränkische alpex L	Fz 40		578478	503,00
G				
gabotherm H+S	TH 10		578342	365,00
	TH 12		578346	365,00
	TH 14		578348	365,00
	TH 15		578350	365,00
	TH 16		578352 R	365,00
	TH 17		578354	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 10 S (PR-2B)**	Mini Z8	574772 R	261,00
	TH 12 S (PR-2B)**	Mini Z8	574776 R	261,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 15 S (PR-2B)**	Mini Z8	574780 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Gallagher USA YogaPipe ACR	H 12 (¼")		578396	329,00
	U 14 (⅜")		578372	360,00
	U 16 (½")		578374	342,00
	U 18 (⅝")		578376	342,00
	U 20 (¾")		578378	342,00
	U 25 (7/8")		578380	342,00
	U 32 (1⅝")		578382	400,00
Geberit FlowFit	GFFb 16-40		578670 R	1.010,00
Geberit Mapress CuNiFe	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Geberit Mapress C-STAHl	M 12		578310	303,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Geberit Mapress C-STAHl Sprinkler nass	M 22		578316	303,00
	M 28		578318	303,00
Geberit Mapress Edelstahl	M 12		578310	303,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
Geberit Mapress Edelstahl Gas	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Geberit Mapress Edelstahl Sprinkler	M 22		578316	303,00
	M 28		578318	303,00
Geberit Mapress Kupfer	M 12		578310	303,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Geberit Mapress Kupfer Gas	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Geberit Mapress Therm	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Geberit Mepla	G 16		578444	365,00
	G 20		578446	365,00
	G 26		578448	389,00
	G 32		578450	414,00
	G 40		578452	537,00
Geberit Mepla Therm	G 16		578444	365,00
	G 20		578446	365,00
	G 26		578448	389,00
Geberit Volex	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
General Fittings ST00	H 16		578400	329,00	General Fittings Trident	H 16		578400	329,00
	H 20		578406	329,00		H 20		578406	329,00
	H 25		578408	329,00		H 26		578410	329,00
	H 26		578410	329,00		H 32		578412	329,00
	H 32		578412	329,00		TH 16		578352 R	365,00
	TH 16		578352 R	365,00		TH 20		578358 R	365,00
	TH 20		578358 R	365,00		TH 26		578362 R	365,00
	TH 25		578360	365,00		TH 32		578364	365,00
	TH 26		578362 R	365,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 32		578364	365,00		TH 20 S (PR-2B)**		574788 R	261,00
	TH 40		578624	485,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		U 16		578374	342,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		U 20		578378	342,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		U 32		578382	400,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 16		578374	342,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 20		578378	342,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 25		578380	342,00	General Fittings Trident Gas	H 16		578400	329,00
	U 32		578382	400,00		H 20		578406	329,00
	U 40		578386	488,00		H 26		578410	329,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		TH 16		578352 R	365,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		TH 20		578358 R	365,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		TH 26		578362 R	365,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		TH 32		578364	365,00
General Fittings Ewoprex	H 16		578400	329,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	H 20		578406	329,00		TH 20 S (PR-2B)**		574788 R	261,00
	H 26		578410	329,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	H 32		578412	329,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00		U 16		578374	342,00
	TH 20		578358 R	365,00		U 20		578378	342,00
	TH 26		578362 R	365,00		U 32		578382	400,00
	TH 32		578364	365,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	TH 40		578624	485,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00	Giacomini Raccordi RM	H 16		578400	329,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		H 20		578406	329,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		H 26		578410	329,00
	U 16		578374	342,00		H 32		578412	329,00
	U 20		578378	342,00		TH 16		578352 R	365,00
General Fittings Serie 5S00	U 32		578382	400,00	Giacomini	TH 20		578358 R	365,00
	U 40		578386	488,00		TH 26		578362 R	365,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		TH 32		578364	365,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		TH 40		578624	485,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		U 16		578374	342,00
	B 16		578468	398,00	Giacomini RM MULTIGAS	U 20		578378	342,00
	B 18		578470	398,00		U 32		578382	400,00
	B 20		578472	398,00		U 40		578386	488,00
	B 26		578474	441,00		H 16		578400	329,00
	B 32		578476	441,00		H 20		578406	329,00
	F 16		578456	348,00		H 26		578410	329,00
	F 20		578460	348,00		H 32		578412	329,00
	F 26		578462	377,00		TH 16		578352 R	365,00
	F 32		578464	377,00		TH 20		578358 R	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00		TH 26		578362 R	365,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00		TH 32		578364	365,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00		U 16		578374	342,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	286,00		U 20		578378	342,00
	H 16		578400	329,00		U 32		578382	400,00
	H 18		578404	329,00	Giacomini Valvole Giacomini serie R850V	V 15		578328	303,00
	H 20		578406	329,00		V 18		578332	303,00
	H 25		578408	329,00		V 22		578334	303,00
	H 26		578410	329,00		V 28		578336	303,00
	H 32		578412	329,00		V 35		578604	364,00
	TH 16		578352 R	365,00		SA 15		578514	364,00
	TH 18		578356	365,00		SA 18		578518	364,00
	TH 20		578358 R	365,00		SA 22		578520	364,00
	TH 25		578360	365,00		SA 28		578522	364,00
	TH 26		578362 R	365,00		M 15		578312	303,00
	TH 32		578364	365,00		M 18		578314	303,00
General Fittings Serie 5S00	TH 40		578624	485,00	Golan Pipe Systems (Scandinavia)	M 22		578316	303,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		M 28		578318	303,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00		M 35		578390	364,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		U 16		578374	342,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		U 20		578378	342,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00	Alu-Pres	U 25		578380	342,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		U 32		578382	400,00
	U 16		578374	342,00		U 40		578386	488,00
	U 18		578376	342,00	Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		578566	365,00
	U 20		578378	342,00		VUS ¾" (OD 22,2 mm)		578568	365,00
	U 25		578380	342,00		VUS 1" (OD 28,6 mm)		578570	365,00
	U 32		578382	400,00		VUS 1¼" (OD 34,9 mm)		578606	365,00
	U 40		578386	488,00					
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00					
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00					
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00					
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00					
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
GS Wärmesysteme System TH	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
GS Wärmesysteme System V	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
H				
HASTINIK Hastinik/Hitpress	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
heima24	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
HELIROMA Klimapress	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 32		578382	400,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
HELIROMA Klimapress PPSU	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
Henco	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	HE 32		578370 R	437,00
Herotec tempusPRESS PLUS	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Herotec tempusPRESS PLUS PPSU	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
HERZ PIPEFIX	TH 10		578342	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 10 S (PR-2B)**	Mini Z8	574772 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
HIDRONIX MULTIGAS	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
HIDRONIX MULTIPIPE	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	H 14		578398	329,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	U 14		578372	360,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
HIDRONIX UNICO	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	H 14		578398	329,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	U 14		578372	360,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
HITEC Sistema Multistrato	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
HITHERM-ISOTUBI NUMEPRESS	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
HITHERM-ISOTUBI HTpress	M 15		578312	303,00	ICMA Sempigas	TH 16		578352 R	365,00
	M 18		578314	303,00		TH 20		578358 R	365,00
	M 22		578316	303,00		TH 25		578360	365,00
	M 28		578318	303,00		TH 26		578362 R	365,00
	M 35		578390	364,00		TH 32		578364	365,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00	ICOOOL PACIFIC COOL PRESS	BMP ¼"		578700	362,00
HITHERM-ISOTUBI HTfire	M 15		578312	303,00		BMP ¾"		578702	362,00
	M 18		578314	303,00		BMP ½"		578704	362,00
	M 22		578316	303,00		BMP ¾"		578706	362,00
	M 28		578318	303,00		BMP ¾"		578708	362,00
	M 35		578390	364,00		VUS ¾" (OD ¾", 22.2 mm)		578568	365,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		BMP 1½"		578714	362,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		BMP ¼" S (PR-2B)	Mini Z8	574810 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		BMP ¾" S (PR-2B)	Mini Z8	574812 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		BMP ½" S (PR-2B)	Mini Z8	574814 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		BMP ⅝" S (PR-2B)	Mini Z8	574816 R	261,00
HITHERM-ISOTUBI HTair	M 15		578312	303,00		BMP ¾" S (PR-2B)	Mini Z8	574818 R	261,00
	M 18		578314	303,00		VUS ¾" S (PR-2B) (OD ¾", 22.2 mm)	Mini Z8	574766 R	261,00
	M 22		578316	303,00		BMP 1 ⅝" S (PR-2B)	Mini Z8	574824 R	261,00
	M 28		578318	303,00	Idrosanitaria Bonomi	TH 16		578352 R	365,00
	M 35		578390	364,00		TH 20		578358 R	365,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		TH 26		578362 R	365,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00	Idropress	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
Hopewell press fit system	M 15		578312	303,00		TH 16		578352 R	365,00
	M 18		578314	303,00		TH 18		578356	365,00
	M 22		578316	303,00		TH 20		578358 R	365,00
	M 28		578318	303,00		TH 26		578362 R	365,00
	M 35		578390	364,00		TH 32		578364	365,00
hp praski BAVARIA-press	TH 10		578342	365,00		TH 40		578624	485,00
	TH 12		578346	365,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 14		578348	365,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 16		578352 R	365,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 17		578354	365,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 20		578358 R	365,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 25		578360	365,00	IDROSISTEMI Ta-Press	F 16		578456	348,00
	TH 26		578362 R	365,00		F 20		578460	348,00
	TH 32		578364	365,00		F 26		578462	377,00
	TH 40		578624	485,00		F 32		578464	377,00
	TH 10 S (PR-2B)**	Mini Z8	574772 R	261,00		F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	TH 12 S (PR-2B)**	Mini Z8	574776 R	261,00		F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00		F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00		Fz 40		578478	503,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		H 16		578400	329,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		H 20		578406	329,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		H 26		578410	329,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		H 32		578412	329,00
ICMA Sempiter	H 16		578400	329,00		U 16		578374	342,00
	H 20		578406	329,00		U 20		578378	342,00
	H 25		578408	329,00		U 25		578380	342,00
	H 26		578410	329,00		U 26 ⁷⁾		578392	400,00
	H 32		578412	329,00		U 32		578382	400,00
	TH 16		578352 R	365,00		U 40		578386	488,00
	TH 20		578358 R	365,00					
	TH 25		578360	365,00					
	TH 26		578362 R	365,00					
	TH 32		578364	365,00					
	TH 40		578624	485,00					
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00					
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00					
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00					
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00					
	U 16		578374	342,00					
	U 20		578378	342,00					
	U 25		578380	342,00					
	U 26 ⁷⁾		578392	400,00					
	U 32		578382	400,00					
	U 40		578386	488,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
IDROTRADE Storm Multipinza	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	THL 32		578368	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
IDROTRADE StormPRES ¹⁾	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
IDROTRADE StormSTEEL ¹⁾	M 12		578310	303,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Instantor Press System	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
Instantor Copper Press Imperial	VI ½" (OD 14,7 mm)		578716	362,00
	VI ¾" (OD 21,0 mm)		578718	362,00
	VI 1" (OD 27,4 mm)		578720	362,00
	VI ½" S (PR-2B)	Mini Z8	574850 R	261,00
	VI ¾" S (PR-2B)	Mini Z8	574852 R	261,00
	VI 1" S (PR-2B)	Mini Z8	574854 R	261,00
Instantor Copper Press Metric	M 15		578312	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
INVENA PROV	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	B 16		578468	398,00
	B 20		578472	398,00
IPA IPANA Press	TH 10		578342	365,00
	TH 11,6		578344	365,00
	TH 12		578346	365,00
	TH 14		578348	365,00
	TH 15		578350	365,00
	TH 16		578352 R	365,00
	TH 17		578354	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 22		578588	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 28		578590	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 10 S (PR-2B)**	Mini Z8	574772 R	261,00
	TH 11,6 S (PR-2B)**	Mini Z8	574774 R	261,00
	TH 12 S (PR-2B)**	Mini Z8	574776 R	261,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 15 S (PR-2B)**	Mini Z8	574780 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 22 S (PR-2B)**	Mini Z8	574790 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 28 S (PR-2B)**	Mini Z8	574796 R	286,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
IPA THu IPANA Press	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 40		578624	485,00
IPALPEX (Industrie du Plastique et Accessoires)	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	THL 32		578368	365,00
	TH 40		578624	485,00
	K16/P18		578592	381,00
	K/20		578594	381,00
	K/25		578596	381,00
	K32		578598	381,00
	K1/40		578600	381,00
	K16/P18		578592	381,00
	K/20		578594	381,00
	K/25		578596	381,00
ISOTUBI NUMEPRESS	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
IVAR ALPEX-GAS	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
IVAR Ivar-Press	B 14		578466	398,00
	B 16		578468	398,00
	B 18		578470	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
	Fz 40		578478	503,00
IVAR MULTI PRESS GAS ITALIA	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	U 16		578374	342,00
	U 20		578378	342,00
IVAR Multi Press MP	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	F 16		578456	348,00
	F 18		578458	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	Fz 40		578478	503,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	B 16		578468	398,00
	B 18		578470	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
IVAR Multi Press Leak (MPL)	TH 16		578352 R	365,00	IVAR Plastic Multi Press Leak (PMPL)	TH 16		578352 R	365,00
	TH 20		578358 R	365,00		TH 20		578358 R	365,00
	TH 26		578362 R	365,00		TH 26		578362 R	365,00
	TH 32		578364	365,00		TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	F 16		578456	348,00		F 16		578456	348,00
	F 20		578460	348,00		F 20		578460	348,00
	F 26		578462	377,00		F 26		578462	377,00
	F 32		578464	377,00		F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00		F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00		F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00		F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00		F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	H 16		578400	329,00		H 16		578400	329,00
	H 20		578406	329,00		H 20		578406	329,00
	H 26		578410	329,00		H 26		578410	329,00
	H 32		578412	329,00		H 32		578412	329,00
	U 16		578374	342,00		U 16		578374	342,00
	U 20		578378	342,00		U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00		U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00		U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	B 16		578468	398,00		B 16		578468	398,00
	B 20		578472	398,00		B 20		578472	398,00
	B 26		578474	441,00		B 26		578474	441,00
	B 32		578476	441,00		B 32		578476	441,00
IVAR Plastic Multi Press PMP	TH 16		578352 R	365,00	IVT Edelstahl- Presssystem	M 15		578312	303,00
	TH 20		578358 R	365,00		M 18		578314	303,00
	TH 25		578360	365,00		M 22		578316	303,00
	TH 26		578362 R	365,00		M 28		578318	303,00
	TH 32		578364	365,00		M 35		578390	364,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	F 16		578456	348,00	IVT PRIPRESS	TH 16		578352 R	365,00
	F 20		578460	348,00		TH 20		578358 R	365,00
	F 26		578462	377,00		TH 26		578362 R	365,00
	F 32		578464	377,00		TH 32		578364	365,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00		TH 40		578624	485,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	H 16		578400	329,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	H 20		578406	329,00	J				
	H 25		578408	329,00	Jäger - Aquatec Aquapress H	H 14		578398	329,00
	H 26		578410	329,00		H 16		578400	329,00
	H 32		578412	329,00		H 17		578402	329,00
	U 16		578374	342,00		H 18		578404	329,00
	U 20		578378	342,00		H 20		578406	329,00
	U 25		578380	342,00		H 26		578410	329,00
IVAR Plastic Multi Press PMP	U 26 ⁷⁾		578392	400,00	Jäger - Aquatec C-Stahl Press Typ M	H 32		578412	329,00
	U 32		578382	400,00		U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		M 15		578312	303,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		M 18		578314	303,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		M 22		578316	303,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00		M 28		578318	303,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		M 35		578390	364,00
	B 16		578468	398,00	Jäger - Aquatec C-Stahl Press Typ M	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	B 20		578472	398,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	B 26		578474	441,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	B 32		578476	441,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
						M 35 S (PR-2B)	Mini Z8	574746 R	286,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
Jäger - Aquatec Edelstahl Press Typ M	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
Jäger - Aquatec Kupfer Press Typ V	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
Jansen AG JANSEN COMISA	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
Jaraflex- Presssystem	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 17		578354	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
JUNGWOO JWPress	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
K	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	VUS ½" (OD 15,9 mm)		578566	365,00
	VUS ¾" (OD 22,2 mm)		578568	365,00
	VUS 1" (OD 28,6 mm)		578570	365,00
	VUS 1½" (OD 34,9 mm)		578606	365,00
KAN KAN-therm Press LBP	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
KAN	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 14		578372	360,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁷⁾		578392	400,00
KAN-therm Inox	U 32		578382	400,00
	U 40		578386	488,00
	U 14 S (PR-2B)**	Mini Z8	574858 R	261,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
KAN KAN-therm Steel	M 12		578310	303,00
	M 15		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22		578316	303,00
	M 28 ¹⁾		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
KAN KAN-therm UltraPRESS	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
KE KELIT COPPERFIX Kupfer	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 14		578372	360,00
	U 16		578374	342,00
KE KELIT KELIT KELOX	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 14 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
KE KELIT KELOX-PPSU-W	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
KE KELIT KELOX-ULTRAX	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
KE KELIT KELOX-ULTRAX-W	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
KE KELIT	U 16		578374	342,00	KISAN	U 20		578378	342,00
KELOX-WINDOW-U	U 18		578376	342,00	Kisan WR	U 25		578380	342,00
	U 20		578378	342,00		U 32		578382	400,00
	U 25		578380	342,00		U 40		578386	488,00
	U 32		578382	400,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 40		578386	488,00		U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		TH 20		578358 R	365,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		TH 25		578360	365,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		TH 32		578364	365,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
KE KELIT	U 16		578374	342,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
KELOX-WINDOW-W	U 18		578376	342,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 20		578378	342,00	KISAN	M 15		578312	303,00
	U 25		578380	342,00	Kistal C	M 18		578314	303,00
	U 32		578382	400,00		M 22		578316	303,00
	U 40		578386	488,00		M 28		578318	303,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		M 35		578390	364,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
KE KELIT	M 15		578312	303,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
steelFIX	M 18		578314	303,00	KISAN	M 15		578312	303,00
C-Stahl	M 22		578316	303,00	Kistal Inox	M 18		578314	303,00
	M 28		578318	303,00		M 22		578316	303,00
	M 35		578390	364,00		M 28		578318	303,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		M 35		578390	364,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
						M 35 S (PR-2B)	Mini Z8	574746 R	286,00
KE KELIT	M 15		578312	303,00	L				
steelFIX	M 18		578314	303,00	LEGEND-PRESS	VUS ½" (OD 15,9 mm)		578566	365,00
Edelstahl	M 22		578316	303,00	press fitting system	VUS ¾" (OD 22,2 mm)		578568	365,00
	M 28		578318	303,00		VUS 1" (OD 28,6 mm)		578570	365,00
	M 35		578390	364,00		VUS 1¼" (OD 34,9 mm)		578606	365,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00					
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00	LK Systems	V 12		578324	303,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00	LK >B-Press	V 15		578328	303,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		V 18		578332	303,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		V 22		578334	303,00
						V 28		578336	303,00
KEMBLA	VAU 15 (OD 12,7 mm)		578630	313,00		V 35		578604	364,00
KemPress (AUS)	VAU 20 (OD 19,1 mm)		578632	313,00		V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	VAU 25 (OD 25,4 mm)		578634	313,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	VAU 32 (OD 31,8 mm)		578636	329,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
						V 22 S (PR-2B)	Mini Z8	574758 R	261,00
KEMBLA	VAU 15 (OD 12,7 mm)		578630	313,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
KemPress Gas (AUS)	VAU 20 (OD 19,1 mm)		578632	313,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	VAU 25 (OD 25,4 mm)		578634	313,00	LK Systems	V 12		578324	303,00
	VAU 32 (OD 31,8 mm)		578636	329,00	LK >B-Press Elförzinkat	V 15		578328	303,00
						V 18		578332	303,00
KISAN	KI 16		578524	387,00		V 22		578334	303,00
Kisan KD	KI 20		578526	387,00		V 28		578336	303,00
	KI 25		578528	387,00		V 35		578604	364,00
	TH 16		578352 R	365,00		V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	TH 20		578358 R	365,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	TH 25		578360	365,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
					LK Systems	V 15		578328	303,00
KISAN	KI 16		578524	387,00	LK >B-Press Gas	V 18		578332	303,00
Kisan WL/WP	KI 20		578526	387,00		V 22		578334	303,00
	KI 25		578528	387,00		V 28		578336	303,00
	KI 32		578530	521,00		V 35		578604	364,00
	TH 16		578352 R	365,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	TH 20		578358 R	365,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	TH 25		578360	365,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	TH 32		578364	365,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00					
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00					
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
LK Systems	TH 16		578352 R	365,00
LK Universal	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
M				
MAINCOR	U 16		578374	342,00
MAINPRESS	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
MAINCOR	U 16		578374	342,00
MAINFLOR	U 20		578378	342,00
Mair Heiotechnik	H 11,5		578394	329,00
M-Press	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
Ma.s.ter System	TH 14		578348	365,00
PRESSMASTER	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	H 14		578398	329,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	U 14		578372	360,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
Meier Tobler	H 16		578400	329,00
metalplast - Stramax	H 20		578406	329,00
Serie XPRT	H 25		578408	329,00
	H 32		578412	329,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
METALGRUP	U 16		578374	342,00
Permatubo	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
METALGRUP	RFz 16		578492	381,00
PexGrup	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
METALGRUP	U 16		578374	342,00
MultiGrup	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00
M-Press Fittings Ltd	M 15		578312	303,00
M-Press Carbon Steel	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
M-Press Fittings Ltd	M 15		578312	303,00
M-Press Copper	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
M-Press Fittings Ltd	M 15		578312	303,00
M-Press Stainless Steel	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Mueller Streamline	VUS ½" (OD 15,9 mm)		578566	365,00
PRS Copper Press	VUS ¾" (OD 22,2 mm)		578568	365,00
	VUS 1" (OD 28,6 mm)		578570	365,00
	VUS 1¼" (OD 34,9 mm)		578606	365,00
MULTITHERM	TH 16		578352 R	365,00
PRESSSYSTEM	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
Multicapas Industrial	RFz 16		578492	381,00
AIS PEX	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00
Multicapas Industrial	H 16		578400	329,00
AIS PPSU	H 20		578406	329,00
	H 25		578408	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
Multicap Industrial AIS XPRT	H 16		578400	329,00	N				
	H 20		578406	329,00					
	H 25		578408	329,00					
	H 26		578410	329,00					
	H 32		578412	329,00	NEUTHERM	H 16		578400	329,00
	RFz 16		578492	381,00	MEKUPRESS-HT	H 20		578406	329,00
	RFz 20		578494	381,00		H 26		578410	329,00
	RFz 25		578496	381,00		H 32		578412	329,00
	RFz 32		578498	381,00					
	TH 16		578352 R	365,00	NIBCO	VUS ½" (OD 15,9 mm)		578566	365,00
	TH 20		578358 R	365,00	Press System	VUS ¾" (OD 22,2 mm)		578568	365,00
	TH 25		578360	365,00		VUS 1" (OD 28,6 mm)		578570	365,00
	TH 26		578362 R	365,00	Copper	VUS 1¼" (OD 34,9 mm)		578606	365,00
	TH 32		578364	365,00					
	TH 40		578624	485,00	NICOLL FLUXO	TH 16		578352 R	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		TH 20		578358 R	365,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		TH 25		578360	365,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		TH 26		578362 R	365,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		TH 32		578364	365,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		TH 40		578624	485,00
	U 16		578374	342,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	U 20		578378	342,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	U 25		578380	342,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	U 26 ⁷⁾		578392	400,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 32		578382	400,00	NUPI Industrie Italianae Multinupi	B 16		578468	398,00
	U 40		578386	488,00		B 18		578470	398,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		B 20		578472	398,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		B 26		578474	441,00
Multicap Industrial multitubo systems MC	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		B 32		578476	441,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00		F 16		578456	348,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00		F 18		578458	348,00
						F 20		578460	348,00
	U 16		578374	342,00		F 26		578462	377,00
	U 18		578376	342,00		F 32		578464	377,00
	U 20		578378	342,00		F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	U 25		578380	342,00		F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	U 32		578382	400,00		F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	U 40		578386	488,00		F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		H 16		578400	329,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		H 18		578404	329,00
Multicap Industrial multitubo systems MM	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		H 20		578406	329,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		H 25		578408	329,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		H 26		578410	329,00
						H 32		578412	329,00
	H 16		578400	329,00		TH 16		578352 R	365,00
	H 20		578406	329,00		TH 18		578356	365,00
	H 25		578408	329,00		TH 20		578358 R	365,00
	H 26		578410	329,00		TH 25		578360	365,00
	H 32		578412	329,00		TH 26		578362 R	365,00
	RFz 16		578492	381,00		TH 32		578364	365,00
	RFz 20		578494	381,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	RFz 25		578496	381,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
multiple Deutschland multiple mp	RFz 32		578498	381,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 16		578352 R	365,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 20		578358 R	365,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 25		578360	365,00		TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 26		578362 R	365,00		U 14		578372	360,00
	TH 32		578364	365,00		U 16		578374	342,00
	TH 40		578624	485,00		U 18		578376	342,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		U 20		578378	342,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		U 25		578380	342,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		U 26 ⁷⁾		578392	400,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		U 32		578382	400,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		U 40		578386	488,00
	U 16		578374	342,00	Nussbaum	U 14 S (PR-2B)**	Mini Z8	574858 R	261,00
	U 20		578378	342,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 25		578380	342,00		U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 26 ⁷⁾		578392	400,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 32		578382	400,00		U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 40		578386	488,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00	Optifitt-Press	VMP ¾" (OD 17,2 mm)		578660	421,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		VMP ½" G (OD 21,3 mm)		578666 R	421,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00		VMPz ¾" (OD 26,9 mm)		578664	421,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00					
	TH 16		578352 R	365,00	Nussbaum	VRX 16		578640	383,00
	TH 20		578358 R	365,00	Optiflex-Flowpress	VRX 20		578642	383,00
	TH 26		578362 R	365,00		VRX 25		578644	421,00
	TH 32		578364	365,00		VRX 32		578646	421,00
	TH 40		578624	485,00					
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00					
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00					
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00					
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Nussbaum Optipress Aquaplus	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
Nussbaum Optipress Gaz	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
Nussbaum Optipress-Therm	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
Oventrop Cofit P	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	H 16 A		578420	425,00
	H 20 A		578426	425,00
Oventrop Cofit PD	H 26 A		578430	425,00
	H 32 A		578432	425,00
	H 16 A		578420	425,00
	H 20 A		578426	425,00
Oventrop Cofit PDK	H 26 A		578430	425,00
	H 32 A		578432	425,00
	H 16 A		578420	425,00
	H 20 A		578426	425,00
Oventrop Cofit PD-HT	H 26 A		578430	425,00
	H 32 A		578432	425,00
	H 16 A		578420	425,00
	H 20 A		578426	425,00
Oventrop Cofit PDK-HT	H 26 A		578430	425,00
	H 32 A		578432	425,00
	H 16 A		578420	425,00
	H 20 A		578426	425,00
O				
PBTub SERTIPRESS	RFz 12		578490	381,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
PBTub SERTI-STEEL ¹⁾	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
Pegler Yorkshire	> Aalberts integrated piping systems			
PERFEXIM PERFEKT SYSTEM	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00
PERFEXIM PERFEKT SYSTEM PLUS	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
PERFILTUBO PERFILALUPEX	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	M 15		578312	303,00
PERFILTUBO PERFILPRESS	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	M 15		578328	303,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
PEXTUBE PexTube	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
Pipelife C-PRESS	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Pipelife Edelstahl	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
Pipelife RADOPRESS	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
Pipetec Connect	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
PLASTICA ALFA Multypex	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
PLASTICA ALFA Multypex Air	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
PLASTICA ALFA Multypexalfa Gas	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
PLASTICA ALFA Multypexalfa Gas protek	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
PLASTICA ALFA Multypex Plus	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
PLASTICA ALFA Multypex Thermo	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
PLASTICA ALFA Multypex Thermo Plus	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
PLÁSTICOS FERRO	U 16		578374	342,00	POLYSAN	M 15		578312	303,00
FERROPLAST	U 20		578378	342,00	Handelsoges.	M 18		578314	303,00
GPf MULT Pressfitting	U 25		578380	342,00	m.b.H. & Co KG	M 22		578316	303,00
MULTICAPA	U 32		578382	400,00	(Krems/Öster- reich)	M 28		578318	303,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		M 35		578390	364,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00	POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00	Edelstahl	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00	Press-System Gas	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
						M 28 S (PR-2B)	Mini Z8	574744 R	261,00
						M 35 S (PR-2B)	Mini Z8	574746 R	286,00
PLÁSTICOS FERRO	U 16		578374	342,00	POLYSAN	M 15		578312	303,00
FERROPLAST	U 20		578378	342,00	Handelsoges.	M 18		578314	303,00
GPf PPSU	U 25		578380	342,00	m.b.H. & Co KG	M 22		578316	303,00
Pressfitting PEX	U 32		578382	400,00	(Krems/Öster- reich)	M 28		578318	303,00
y MULTICAPA	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		M 35		578390	364,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00	POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00	Edelstahl	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00	Press-System	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
					Wasser	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
						M 35 S (PR-2B)	Mini Z8	574746 R	286,00
PLÁSTICOS FERRO	RFz 16		578492	381,00	POLYSAN	TH 14		578348	365,00
FERROPLAST	RFz 20		578494	381,00	Handelsoges.	TH 16		578352 R	365,00
GPf PRESS	RFz 25		578496	381,00	m.b.H. & Co KG	TH 17		578354	365,00
Pressfitting PEX	RFz 32		578498	381,00	(Krems/Öster- reich)	TH 18		578356	365,00
						TH 20		578358 R	365,00
PLUMBING PLUS	K16/P18		578592	381,00	POLYSAN-	TH 26		578362 R	365,00
EZiPEX Crimp	K/20		578594	381,00	Press-System	TH 32		578364	365,00
(AUS)	K/25		578596	381,00		TH 40		578624	485,00
	K32		578598	381,00		TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	K1/40		578600	381,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
PLUMBING PLUS	K16/P18		578592	381,00		TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
EZiPEX Gas	K/20		578594	381,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
(AUS)	K/25		578596	381,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	K32		578598	381,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	K1/40		578600	381,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
PLUMBING PLUS	Yz 16 UNI		578756 R	381,00	POLYSAN	TH 14		578348	365,00
UNIPEX	Yz 20 UNI		578758 R	381,00	Handelsoges.	TH 16		578352 R	365,00
Water & Gas (AUS)	Yz 25 UNI		578760 R	381,00	m.b.H. & Co KG	TH 17		578354	365,00
	Yz 32 UNI		578762 R	381,00	(Krems/Öster- reich)	TH 18		578356	365,00
						TH 20		578358 R	365,00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		578630	313,00	POLYSAN-Henco-	TH 26		578362 R	365,00
EZiPRESS Gas	VAU 20 (OD 19,1 mm)		578632	313,00	Press-System	HE 32		578370 R	437,00
(AUS)	VAU 25 (OD 25,4 mm)		578634	313,00		TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	VAU 32 (OD 31,8 mm)		578636	329,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	261,00		TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	261,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	286,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
						TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		578630	313,00	Prandelli	H 14		578398	329,00
EZiPRESS Solar	VAU 20 (OD 19,1 mm)		578632	313,00	Multyrama Pf	H 16		578400	329,00
(AUS)	VAU 25 (OD 25,4 mm)		578634	313,00		H 18		578404	329,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	261,00		H 20		578406	329,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	261,00		H 26		578410	329,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	286,00		H 32		578412	329,00
						U 40		578386	488,00
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		578630	313,00	Prandelli	H 16		578400	329,00
EZiPRESS Water	VAU 20 (OD 19,1 mm)		578632	313,00	Multyrama Pfm	H 18		578404	329,00
(AUS)	VAU 25 (OD 25,4 mm)		578634	313,00		H 20		578406	329,00
	VAU 32 (OD 31,8 mm)		578636	329,00		H 26		578410	329,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	261,00		H 32		578412	329,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	261,00		TH 16		578352 R	365,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	286,00		TH 18		578356	365,00
						TH 20		578358 R	365,00
POLYPIPE	TH 10		578342	365,00		TH 26		578362 R	365,00
POLYSURE	TH 15		578350	365,00		TH 32		578364	365,00
	TH 22		578588	365,00		TH 40		578624	485,00
	TH 28		578590	365,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
POLYSAN	M 15		578312	303,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
Handelsoges.	M 18		578314	303,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
m.b.H. & Co KG	M 22		578316	303,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
(Krems/Öster- reich)	M 28		578318	303,00		TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	M 35		578390	364,00		U 16		578374	342,00
POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		U 18		578376	342,00
C Stahl-Press-	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		U 20		578378	342,00
System M	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		U 40		578386	488,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00					
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00					
POLYSAN	M 15		578312	303,00					
Handelsoges.	M 18		578314	303,00					
m.b.H. & Co KG	M 22		578316	303,00					
(Krems/Öster- reich)	M 28		578318	303,00					
	M 35		578390	364,00					
POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	261,00					
Edelstahl	M 18 S (PR-2B)	Mini Z8	574740 R	261,00					
Press-System	M 22 S (PR-2B)	Mini Z8	574742 R	261,00					
1.4520	M 28 S (PR-2B)	Mini Z8	574744 R	261,00					
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
PURMO Cleverfit Radial	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)**	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 17		578354	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	VP 16		578482	364,00
	VP 20		578484	364,00
	VP 32		578488	402,00
R				
Raccorderie Metalliche aesPRES ¹⁾	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Raccorderie Metalliche inoxPRES ¹⁾	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Raccorderie Metalliche MARINEPRES ¹⁾	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Raccorderie Metalliche steelPRES ¹⁾	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
RBM Tita-fix	B 14		578466	398,00
	B 16		578468	398,00
	B 18		578470	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	F 16		578456	348,00
	F 18		578458	348,00
	F 20		578460	348,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	H 14		578398	329,00
	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00
	U 14		578372	360,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
RBM Tita-gas	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
Redi Nicoll Fluxo	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
Redi Nicoll Fluxo Gas	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	LD 16		578652	379,00
	LD 20		578654	379,00
	LD 25		578656	379,00
	U 14		578372	360,00
	U 16		578374	342,00
RIFENG LD PRESS FITTING (F8)	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
RIFENG U PRESS FITTING (F5)	TH 40		578624	485,00
	RFz 12		578490	381,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
RIQUIER A SERTIR	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
RIQUIER Système multicouche	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 32		578382	400,00
Roth PressCheck	U 40		578386	488,00
	RN 14		578434	342,00
	RN 16		578454	342,00
	RN 17		578436	342,00
	RN 20		578438	342,00
	RN 25/26		578440	342,00
	RN 32		578442	400,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS M	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 GAS V	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
Rubinetterie Bresciane Bonomi FRABOPRESS 316 M	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
Rubinetteria Bresciane Bonomi FRABOPRESS 316 V	V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578324 578328 578332 578334 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	303,00 303,00 303,00 303,00 303,00 364,00 261,00 261,00 261,00 261,00 261,00 286,00	Rubinetteria Bresciane Bonomi FRABOPRESS SOLAR	V 15 V 18 V 22 V 28 V 35 V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578328 578332 578334 578336 578604 574752 R 574756 R 574758 R 574760 R 574762 R	303,00 303,00 303,00 303,00 364,00 261,00 261,00 261,00 261,00 286,00
Rubinetteria Bresciane Bonomi FRABO CHROME	V 12 V 15 V 18 V 22 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578324 578328 578332 578334 574748 R 574752 R 574756 R 574758 R	303,00 303,00 303,00 303,00 261,00 261,00 261,00 261,00	Rubinetteria Bresciane Bonomi TURBO CuNi	V 12 V 15 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578324 578328 578332 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	303,00 303,00 303,00 303,00 364,00 261,00 261,00 261,00 261,00 286,00
Rubinetteria Bresciane Bonomi FRABOPRESS C-STEEL M	M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R	303,00 303,00 303,00 303,00 364,00 261,00 261,00 261,00 261,00 286,00	Rubinetteria Bresciane Bonomi TURBO PRESS	M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R	303,00 303,00 303,00 303,00 364,00 261,00 261,00 261,00 261,00 286,00
Rubinetteria Bresciane Bonomi FRABOPRESS C-STEEL V	V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578324 578328 578332 578334 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	303,00 303,00 303,00 303,00 303,00 364,00 261,00 261,00 261,00 261,00 261,00 286,00	Rubinetteria Bresciane Bonomi TURBO PRESS	B 14 B 16 B 18 B 20 B 26 B 32 H 14 H 16 H 18 H 20 H 26 H 32 TH 14 TH 16 TH 18 TH 20 TH 26 TH 32 U 14 U 16 U 18 U 20 U 26 ⁷⁾ U 32 U 14 S (PR-2B)** U 16 S (PR-2B)** U 18 S (PR-2B)** U 20 S (PR-2B)** U 26 S (PR-2B)** U 32 S (PR-2B)**	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578466 578468 578470 578472 578474 578476 578398 578400 578404 578406 578410 578412 578348 578352 R 578356 578358 R 578362 R 578364 578624 574778 R 574782 R 574786 R 574788 R 574794 R 574798 R 578372 578374 578376 578378 578392 578382 574858 R 574860 R 574870 R 574862 R 574866 R 574868 R	398,00 398,00 398,00 398,00 441,00 441,00 329,00 329,00 329,00 329,00 329,00 329,00 365,00 365,00 365,00 365,00 485,00 261,00 261,00 261,00 261,00 261,00 286,00 360,00 342,00 342,00 342,00 400,00 400,00 261,00 261,00 261,00 261,00 261,00 286,00
Rubinetteria Bresciane Bonomi FRABOPRESS GAS M	M 12 M 15 M 18 M 22 M 28 M 35 M 12 S (PR-2B) M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578310 578312 578314 578316 578318 578390 574736 R 574738 R 574740 R 574742 R 574744 R 574746 R	303,00 303,00 303,00 303,00 303,00 364,00 261,00 261,00 261,00 261,00 261,00 286,00	Rubinetteria Bresciane Bonomi FRABOPRESS GAS V	V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578324 578328 578332 578334 578336 578604 574748 R 574752 R 574756 R 574758 R 574760 R 574762 R	303

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacture.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- ¹ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ² For taking suitable pressing inserts.
- ³ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- ⁴ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁶ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- ⁷ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
SA.MI PLASTIC Multistrato Gas	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
SANHA 3fit-Press Pb-free Serie 25000	B 16		578468	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	Fz 40		578478	503,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 40		578386	488,00
SANHA 3fit-Press PPSU Serie 35000	B 16		578468	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
SANHA Heavy Steel Press	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
SANHA Heavy Steel Press Gas	VMP ½" G (OD 21,3 mm) ⁴⁾		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15		578514	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15 ¹⁾		578328	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
SANHA NiroTherm Serie 91000	SA 15		578514	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15 ¹⁾		578328	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		578514	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15 ¹⁾		578328	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
SANHA-NiroSan- Presssystem Serie 9000	SA 15		578514	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15 ¹⁾		578328	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
SANHA NiroTherm Serie 91000	SA 15		578514	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15 ¹⁾		578328	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
SANHA NiroTherm Industry Serie 98000	SA 15		578514	364,00	SANHA-Press Pressfittings Serie 6000	SA 12		578510	529,00
	SA 18		578518	364,00		SA 14		578512	529,00
	SA 22		578520	364,00		SA 15		578514	364,00
	SA 28		578522	364,00		SA 16		578516	364,00
	M 15 ¹⁾		578312	303,00		SA 18		578518	364,00
	M 18 ¹⁾		578314	303,00		SA 22		578520	364,00
	M 22 ¹⁾		578316	303,00		SA 28		578522	364,00
	M 28		578318	303,00		M 12		578310	303,00
	M 35		578390	364,00		M 15 ¹⁾		578312	303,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		M 18 ¹⁾		578314	303,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		M 22 ¹⁾		578316	303,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		M 28		578318	303,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		M 35		578390	364,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	V 15 ¹⁾		578328	303,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	V 18 ¹⁾		578332	303,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	V 22 ¹⁾		578334	303,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	V 28		578336	303,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	V 35		578604	364,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		V 12		578324	303,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00		V 14		578326	303,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		VG 14		578338	303,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		V 15 ¹⁾		578328	303,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00		V 16		578330	303,00
SANHA-Press Chrom Serie 16000	SA 12		578510	529,00	SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		578510	529,00
	SA 15		578514	364,00		SA 15		578514	364,00
	SA 18		578518	364,00		SA 18		578518	364,00
	SA 22		578520	364,00		SA 22		578520	364,00
	SA 28		578522	364,00		SA 28		578522	364,00
	M 12		578310	303,00		M 12		578310	303,00
	M 15 ¹⁾		578312	303,00		M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00		M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00		M 22 ¹⁾		578316	303,00
	M 28		578318	303,00		M 28		578318	303,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00		M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	V 12		578324	303,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	V 15 ¹⁾		578328	303,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 18 ¹⁾		578332	303,00		V 12		578324	303,00
	V 22 ¹⁾		578334	303,00		V 14		578326	303,00
	V 28		578336	303,00		VG 14		578338	303,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		V 15 ¹⁾		578328	303,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00		V 16		578330	303,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00		VG 16		578340	303,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00		V 18 ¹⁾		578332	303,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00		V 22 ¹⁾		578334	303,00
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		578510	529,00	SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		578510	529,00
	SA 14		578512	529,00		SA 14		578512	529,00
	SA 15		578514	364,00		SA 15		578514	364,00
	SA 16		578516	364,00		SA 16		578516	364,00
	SA 18		578518	364,00		SA 18		578518	364,00
	SA 22		578520	364,00		SA 22		578520	364,00
	SA 28		578522	364,00		SA 28		578522	364,00
	M 12		578310	303,00		M 12		578310	303,00
	M 15 ¹⁾		578312	303,00		M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00		M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00		M 22 ¹⁾		578316	303,00
	M 28		578318	303,00		M 28		578318	303,00
	M 35		578390	364,00		M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00		M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 12		578324	303,00		V 12		578324	303,00
	V 14		578326	303,00		V 15 ¹⁾		578328	303,00
	VG 14		578338	303,00		V 18 ¹⁾		578332	303,00
	V 15 ¹⁾		578328	303,00		V 22 ¹⁾		578334	303,00
	V 16		578330	303,00		V 28		578336	303,00
	VG 16		578340	303,00		V 35		578604	364,00
	V 18 ¹⁾		578332	303,00		V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 22 ¹⁾		578334	303,00		V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 28		578336	303,00		V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 35		578604	364,00		V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00		V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	261,00		V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00					
	VG 16 S (PR-2B)	Mini Z8	574754 R	261,00					
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00					
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00					
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00					
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00					

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- 4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- 6) Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- 7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
SANHA PURAPRESS Serie 8000	SA 12		578510	529,00
	SA 14		578512	529,00
	SA 15		578514	364,00
	SA 16		578516	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 12 ¹⁾		578310	303,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28 ¹⁾		578318	303,00
	M 35 ¹⁾		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 12		578324	303,00
	V 14		578326	303,00
	VG 14		578338	303,00
	V 15 ¹⁾		578328	303,00
	V 16		578330	303,00
	VG 16		578340	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
SANHA-Therm Serie 24000	SA 12		578510	529,00
	SA 15		578514	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 12		578310	303,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 12		578324	303,00
	V 15 ¹⁾		578328	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
SANHA-Therm Industry Serie 28000	SA 12		578510	529,00
	SA 15		578514	364,00
	SA 18		578518	364,00
	SA 22		578520	364,00
	SA 28		578522	364,00
	M 12		578310	303,00
	M 15 ¹⁾		578312	303,00
	M 18 ¹⁾		578314	303,00
	M 22 ¹⁾		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	V 12		578324	303,00
	V 15 ¹⁾		578328	303,00
	V 18 ¹⁾		578332	303,00
	V 22 ¹⁾		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
SANITOP PERMATUBO INOX	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
SANPRO THPRESS	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
SATEC SK ViTerm	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	U 40		578386	488,00
SAVEUR REFLEX PEX Water	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
SAVEUR REFLEX PEX-AL-PEX Gas	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
Schütz duo-flex tri-o-flex	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 17		578354	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
Schwer Fittings AQUApress	M 12		578310	303,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
Sestapress	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	> Aalberts integrated piping systems			
SESTA SESTA GAS	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
SESTA sistema multistrato	H 16		578400	329,00
	H 20		578406	329,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	U 16		578374	342,00
SIGMA LI Premium	U 20		578378	342,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
SLOVARM PEX-THERM	U 20		578378	342,00
	H 26		578410	329,00
	U 32		578382	400,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
STANDARD HIDRAULICA MultiStandard	RFz 16		578492	381,00	STH Westco COPPER PRESS	M 15		578312	303,00
	RFz 20		578494	381,00		M 22		578316	303,00
	RFz 25		578496	381,00		M 28		578318	303,00
	RFz 32		578498	381,00		M 35		578390	364,00
	U 16		578374	342,00		M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	U 18		578376	342,00		M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	U 20		578378	342,00		M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	U 25		578380	342,00		M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	U 32		578382	400,00	T				
	U 40		578386	488,00	TDM BRASS Serie 1600	H 16		578400	329,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		H 18		578404	329,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		H 20		578406	329,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00		H 25		578408	329,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		H 26		578410	329,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		H 32		578412	329,00
STANDARD HIDRAULICA MultiStandard PLUS	H 16		578400	329,00		TH 16		578352 R	365,00
	H 20		578406	329,00		TH 18		578356	365,00
	H 25		578408	329,00		TH 20		578358 R	365,00
	H 32		578412	329,00		TH 25		578360	365,00
	RFz 16		578492	381,00		TH 26		578362 R	365,00
	RFz 20		578494	381,00		THL 32		578368	365,00
	RFz 25		578496	381,00		TH 40		578624	485,00
	RFz 32		578498	381,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 16		578352 R	365,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20		578358 R	365,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25		578360	365,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32		578364	365,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		U 16		578374	342,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		U 18		578376	342,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00		U 20		578378	342,00
steeltrade Pressssystem Edelstahl Kontur M	TH 32 S (PR-2B)**	Mini Z8	574798 R	286,00		U 25		578380	342,00
	U 16		578374	342,00		U 26 ⁷⁾		578392	400,00
	U 18		578376	342,00		U 32		578382	400,00
	U 20		578378	342,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 25		578380	342,00		U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 32		578382	400,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 40		578386	488,00		U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00	TDM BRASS Serie 2600	H 16		578400	329,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00		H 18		578404	329,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00		H 20		578406	329,00
steeltrade Pressssystem Edelstahl Kontur M	M 15		578312	303,00		H 25		578408	329,00
	M 18 ¹⁾		578314	303,00		H 26		578410	329,00
	M 22		578316	303,00		H 32		578412	329,00
	M 28 ¹⁾		578318	303,00		TH 16		578352 R	365,00
	M 35		578390	364,00		TH 18		578356	365,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00		TH 20		578358 R	365,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00		TH 25		578360	365,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00		TH 26		578362 R	365,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00		THL 32		578368	365,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
STELBI Polikraft	H 16		578400	329,00		TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	H 20		578406	329,00		TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	H 26		578410	329,00		TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 16		578352 R	365,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 20		578358 R	365,00		U 16		578374	342,00
	TH 26		578362 R	365,00		U 18		578376	342,00
	TH 32		578364	365,00		U 20		578378	342,00
	TH 40		578624	485,00		U 25		578380	342,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00		U 26 ⁷⁾		578392	400,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		U 32		578382	400,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00		U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 16		578374	342,00		U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 20		578378	342,00		U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 26 ⁷⁾		578392	400,00		U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
STELBI Stelgas	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00		U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00	TDM BRASS Serie 1700 gas	TH 16		578352 R	365,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00		TH 20		578358 R	365,00
	TH 16		578352 R	365,00		TH 26		578362 R	365,00
	TH 20		578358 R	365,00		THL 32		578368	365,00
	TH 26		578362 R	365,00		TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00	TermoConcept TC-PRESS	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00		TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00		Basic E 01 ²⁾		578618	640,00
					THERMOLUTZ	H 14		578398	329,00
						H 16		578400	329,00
						TH 20		578358 R	365,00
						TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
TE-SA TE-SA press serie 800	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
THERMACOME ACOPEX ALU	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 32		578382	400,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
TIEMME Serie 1650 AL-COBRAPEX	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	THL 32		578368	365,00
	TH 40		578624	485,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16		578352 R	365,00
TIEMME Serie 1650CT Serie COMPACT	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	THL 32		578368	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	THL 32		578368	365,00
TIEMME Serie 1650CTSN Serie COMPACT	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	RFz 12		578490	381,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
	RFz 32		578498	381,00
	TH 40		578624	485,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
TIEMME Serie 2650 GAS	TH 26		578362 R	365,00
	THL 32		578368	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
TKM Systemtechnik	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
TRA Multi TRA+	TH 40		578624	485,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
TRA MULTITRAPRESS	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
TRA TRAPRESS	H 12		578396	329,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	RFz 12		578490	381,00
	RFz 16		578492	381,00
	RFz 20		578494	381,00
	RFz 25		578496	381,00
RFz 32		578498	381,00	
Tradelink TradePex Crimp Water	K16/P18		578592	381,00
	K/20		578594	381,00
	K/25		578596	381,00
	K32		578598	381,00
K1/40		578600	381,00	
Tradelink TradePex Crimp Gas	K16/P18		578592	381,00
	K/20		578594	381,00
	K/25		578596	381,00
	K32		578598	381,00
K1/40		578600	381,00	
TUBIPLAST ITALY MULTILAYER PIPE	H 16		578400	329,00
	H 18		578404	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16		578352 R	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
TH 32 S (PR-2B)	Mini Z8	574798 R	286,00	
TWEETOP	U 16		578374	342,00
	U 18		578376	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 18 S (PR-2B)**	Mini Z8	574870 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
U 25 S (PR-2B)**	Mini Z8	574864 R	261,00	
U 32 S (PR-2B)	Mini Z8	574868 R	286,00	
U				
UNICAL AG MAX-MULTIPEX	U 16		578374	342,00
	U 20		578378	342,00
	H 26		578410	329,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
UNIDELTA DELTA PRESS	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 32		578382	400,00
U 40		578386	488,00	
UNIDELTA DELTA PRESS GAS	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	U 16		578374	342,00
U 20		578378	342,00	
U 32		578382	400,00	

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
Uponor	UP 14		578576	342,00
	UP 16		578578	342,00
	UP 20		578582	342,00
	UP 25		578584	342,00
	UP 32		578586	400,00
	U 40		578386	488,00
V				
Valsir Bravopress	B 16		578468	398,00
	B 20		578472	398,00
	B 26		578474	441,00
	B 32		578476	441,00
	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	H 32 V		578602	425,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
Valsir PEXAL	H 14		578398	329,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	H 32 V		578602	425,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
Van Marcke NV SYSTEMPEX	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
Van Marcke NV Tubipress	M 12		578310	303,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 12 S (PR-2B)	Mini Z8	574736 R	261,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
Variotherm System TH	TH 11,6		578344	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 11,6 S (PR-2B)**	Mini Z8	574774 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
VESBO CARBON	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
VESBO INOX	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
VESBO MULTIPRESS TH-U	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 26 ⁷⁾		578392	400,00
	U 32		578382	400,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 26 S (PR-2B)**	Mini Z8	574866 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
VESBO VPREMIUM	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
Viega Fonterra	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)**	Mini Z8	574868 R	286,00
	VX 12		578550	421,00
	VP 14/15		578480	364,00
Viega MegaPress (ASTM) ⁵⁾	VP 16/17		578482	364,00
	VP 20		578484	364,00
	VP 25		578486	364,00
Viega MegaPress 304 FKM (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega MegaPress 316 (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega MegaPress 316 FKM (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega MegaPress CuNi (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega MegaPress FKM (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega MegaPresG (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega Megapress (EN) ⁴⁾	VMP ¾" (OD 17,2 mm)		578660	421,00
	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega MegapressS (EN) ⁴⁾	VMP ¾" (OD 17,2 mm)		578660	421,00
	VMP ½" G (OD 21,3 mm)		578666 R	421,00
	VMPz ¾" (OD 26,9 mm)		578664	421,00
Viega Pexfit	VX 16		578552	421,00
	VX 20		578554	421,00
	VX 25		578556	421,00
Viega Pexfit G	VX 16		578552	421,00
	VX 20		578554	421,00
	VX 25		578556	421,00
Viega Prestabo	V 12		578324	303,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
Viega Profipress	V 12		578324	303,00
	VG 14		578338	303,00
	V 15		578328	303,00
	VG 16		578340	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

⁶⁾ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini
REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Viega Profipress G	V 12		578324	303,00
	VG 14		578338	303,00
	V 15		578328	303,00
	VG 16		578340	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	VG 14 S (PR-2B)	Mini Z8	574750 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	VG 16 S (PR-2B)	Mini Z8	574754 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Viega Profipress S	V 12		578324	303,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Viega Profipress Therm	V 12		578324	303,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
Viega ProPress (ASTM) ⁵⁾	VUS ½" (OD 15,9 mm)		578566	365,00
	VUS ¾" (OD 22,2 mm)		578568	365,00
	VUS 1" (OD 28,6 mm)		578570	365,00
	VUS 1¼" (OD 34,9 mm)		578606	365,00
	VUS ½" S (PR-2B) (OD 15,9 mm)	Mini Z8	574764 R	261,00
	VUS ¾" S (PR-2B) (OD 22,2 mm)	Mini Z8	574766 R	261,00
	VUS 1" S (PR-2B) (OD 28,6 mm)	Mini Z8	574768 R	261,00
	VUS 1¼" S (PR-2B) (OD 34,9 mm)	Mini Z8	574770 R	261,00
Viega ProPress 304 FKM (ASTM) ⁵⁾	VUS ½" (OD 15,9 mm)		578566	365,00
	VUS ¾" (OD 22,2 mm)		578568	365,00
	VUS 1" (OD 28,6 mm)		578570	365,00
	VUS 1¼" (OD 34,9 mm)		578606	365,00
	VUS ½" (OD 15,9 mm)		578566	365,00
Viega ProPress 316 (ASTM) ⁵⁾	VUS ¾" (OD 22,2 mm)		578568	365,00
	VUS 1" (OD 28,6 mm)		578570	365,00
	VUS 1¼" (OD 34,9 mm)		578606	365,00
	VAU 15 (OD 12,7 mm)		578630	313,00
	VAU 20 (OD 19,1 mm)		578632	313,00
Viega Propress WATER System AUS	VAU 25 (OD 25,4 mm)		578634	313,00
	VAU 32 (OD 31,8 mm)		578636	329,00
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	261,00
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	261,00
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	286,00
	VAU 32 S (PR-2B) (OD 31,8 mm)	Mini Z8	574856 R	286,00
	VAU 15 (OD 12,7 mm)		578630	313,00
	VAU 20 (OD 19,1 mm)		578632	313,00
Viega ProPressG GAS System AUS	VAU 25 (OD 25,4 mm)		578634	313,00
	VAU 32 (OD 31,8 mm)		578636	329,00
Viega Raxinox	VRX 16		578640	383,00
	VRX 20		578642	383,00
Viega Raxofix	VRX 16		578640	383,00
	VRX 20		578642	383,00
	VRX 25		578644	421,00
	VRX 32		578646	421,00
Viega Sanfix	VP 16/17		578482	364,00
	VP 20		578484	364,00
	VP 25		578486	364,00
	VP 32		578488	402,00
Viega Sanfix Fosta	VP 16/17		578482	364,00
	VP 20		578484	364,00
	VP 25		578486	364,00
	VP 32		578488	402,00
Viega Sanpress	V 12		578324	303,00
	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 12 S (PR-2B)	Mini Z8	574748 R	261,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Viega Sanpress Inox	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	Art.-No.	KM
Viega Sanpress Inox G	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
Viega Smartpress	VX 16		578552	421,00
	VX 20		578554	421,00
	VX 25		578556	421,00
Viega Temponox	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
Viessmann	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
Vogel & Noot EASYTEC	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
VSH	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	> Aalberts integrated piping systems			

W				
Watts MTR Art press	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
WATTS RADIANT Watts WaterPEX	US ¾"		578534	415,00
	US ½"		578536	415,00
	US ¾"		578538	415,00
	US 1"		578540	415,00
WATTS RADIANT Watts RadiantPEX	US ¾"		578534	415,00
	US ½"		578536	415,00
	US ¾"		578538	415,00
	US 1"		578540	415,00
WATTS RADIANT Watts RadiantPEX-AL	U 16 (½")		578374	342,00
	U 20 (¾")		578378	342,00
	U 25 (¾")		578380	342,00
	U 32 (1")		578382	400,00
Wavin Tigris K5/M5	B 16		578468	398,00
	B 20		578472	398,00
	B 32		578476	441,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 25		578408	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 25		578360	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 25 S (PR-2B)**	Mini Z8	574792 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	U 25		578380	342,00
	U 32		578382	400,00
WEECON PRESS-C-Stahl	U 40		578386	488,00
	U 16 S (PR-2B)**	Mini Z8	574860 R	261,00
	U 20 S (PR-2B)**	Mini Z8	574862 R	261,00
	U 25 S (PR-2B)**	Mini Z8	574864 R	261,00
	U 32 S (PR-2B)	Mini Z8	574868 R	286,00
	UP 16		578578	342,00
	UP 20		578582	342,00
	UP 25		578584	342,00
	UP 32		578586	400,00
	M 15		578312	303,00
WEECON PRESS-Edelstahl	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00
	M 15		578312	303,00
	M 18		578314	303,00
	M 22		578316	303,00
	M 28		578318	303,00
	M 35		578390	364,00
	M 15 S (PR-2B)	Mini Z8	574738 R	261,00
	M 18 S (PR-2B)	Mini Z8	574740 R	261,00
	M 22 S (PR-2B)	Mini Z8	574742 R	261,00
	M 28 S (PR-2B)	Mini Z8	574744 R	261,00
	M 35 S (PR-2B)	Mini Z8	574746 R	286,00

REMS pressing tongs Mini

REMS pressing rings

Accessories for REMS radial presses 22 kN

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
WEECON PRESS-Kupfer	V 15		578328	303,00
	V 18		578332	303,00
	V 22		578334	303,00
	V 28		578336	303,00
	V 35		578604	364,00
	V 15 S (PR-2B)	Mini Z8	574752 R	261,00
	V 18 S (PR-2B)	Mini Z8	574756 R	261,00
	V 22 S (PR-2B)	Mini Z8	574758 R	261,00
	V 28 S (PR-2B)	Mini Z8	574760 R	261,00
	V 35 S (PR-2B)	Mini Z8	574762 R	286,00
WEM	U 16		578374	342,00
WIELAND-WERKE cuprotherm CTX	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 14 S (PR-2B)**	Mini Z8	574778 R	261,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
WKS-Press	TH 14		578348	365,00
	TH 16		578352 R	365,00
	TH 17		578354	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
WÜRTH Würth	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	HE 32		578370 R	437,00
X				
XtraConnect	F 16		578456	348,00
	F 20		578460	348,00
	F 26		578462	377,00
	F 32		578464	377,00
	F 16 S (PR-2B)**	Mini Z8	574728 R	261,00
	F 20 S (PR-2B)**	Mini Z8	574730 R	261,00
	F 26 S (PR-2B)**	Mini Z8	574732 R	261,00
	F 32 S (PR-2B)	Mini Z8	574734 R	286,00
	H 16		578400	329,00
	H 20		578406	329,00
	H 26		578410	329,00
	H 32		578412	329,00
	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	U 16		578374	342,00
	U 20		578378	342,00
	(DN 26) U 25		578380	342,00
	U 32		578382	400,00
	VP 16		578482	364,00
	VP 20		578484	364,00
	VP 32		578488	402,00

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	Art.-No.	KM
Y				
YX COPPER	Yz 16 UNI		578756 R	381,00
UNIPEX Water & Gas (AUS)	Yz 20 UNI		578758 R	381,00
	Yz 25 UNI		578760 R	381,00
	Yz 32 UNI		578762 R	381,00
Z				
ZEWO THERM Zewo Press Premium	TH 12		578346	365,00
	TH 16		578352 R	365,00
	TH 17		578354	365,00
	TH 18		578356	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 40		578624	485,00
	TH 12 S (PR-2B)**	Mini Z8	574776 R	261,00
	TH 16 S (PR-2B)**		574782 R	261,00
	TH 17 S (PR-2B)**	Mini Z8	574784 R	261,00
	TH 18 S (PR-2B)**	Mini Z8	574786 R	261,00
	TH 20 S (PR-2B)**		574788 R	261,00
	TH 26 S (PR-2B)**		574794 R	261,00
ZEWO THERM Zewo Press PPSU	TH 16		578352 R	365,00
	TH 20		578358 R	365,00
	TH 26		578362 R	365,00
	TH 32		578364	365,00
	TH 16 S (PR-2B)**	Mini Z8	574782 R	261,00
	TH 20 S (PR-2B)**	Mini Z8	574788 R	261,00
	TH 26 S (PR-2B)**	Mini Z8	574794 R	261,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	286,00
	US ¾"		578534	415,00
	US ½"		578536	415,00
ZURN INDUSTRIES	US ¾"		578538	415,00
ZURN PEX	US 1"		578540	415,00

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 199. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For taking suitable pressing inserts.

3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

4) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

5) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

6) Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.

7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2024. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 195 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

Accessories

Description	Art.-No.	KM
Adapter tongs Mini Z8 for driving REMS pressing rings S (PR-2B)	574700R	300,00
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516R	203,00
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704R	302,00
Steel case with insert for 8 pressing tongs Mini/ cropping tongs Mini and compartment for pipe cutter up to 42 mm	578295R	203,00
L-Boxx system case with insert for 11 pressing tongs Mini and 6 pressing rings S (PR-2B)	578659R	302,00



REMS pressing tongs Mini Set

Accessories for REMS radial presses 22 kN



Supply format

REMS pressing tongs Mini Set. REMS Mini pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**). Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Driven by all REMS radial presses 22 kN. In L-Boxx system case.

Description	Art.-No.	KM
Set ACz 12 + 16 + 20	578081R	1.450,00
Set B 16 + 20 + 26	578074R	1.540,00
Set BMP $\frac{1}{4} + \frac{3}{8} + \frac{1}{2} + \frac{5}{8}$"	578090R	1.750,00
Set BMP $\frac{1}{4} + \frac{3}{8} + \frac{1}{2} + \frac{5}{8} + \frac{3}{4} + \frac{7}{8} + 1 + 1\frac{1}{8}$"	578091R	3.200,00
Set F 16 + 20 + 26	578072R	1.380,00
Set G 16 + 20 + 26	578073R	1.420,00
Set H 16 + 20 + 26	578077R	1.290,00
Set HA 16 + 20 + 26	578078R	1.580,00
Set M 15 + 18 + 22 + 28	578059R	1.520,00
Set M 15 + 18 + 22 + 28 + 35	578055R	1.880,00
Set M 15 + 22 + 28 + 35	578057R	1.580,00
Set RFz 12 + 16 + 20	578079R	1.450,00
Set RFz 16 + 20 + 25	578075R	1.450,00
Set RN 16 + 20 + 25	578076R	1.330,00
Set TH 16 + 20 + 26	578069R	1.400,00
Set U 16 + 20 + 25	578070R	1.330,00
Set UP 16 + 20 + 25	578071R	1.330,00
Set V 14 + 16 + 22 + 28	578067R	1.520,00
Set V 15 + 18 + 22 + 28	578060R	1.520,00
Set V 15 + 18 + 22 + 28 + 35	578056R	1.880,00
Set V 15 + 22 + 28 + 35	578058R	1.580,00
Set VG 14 + 16, V 22 + 28	578068R	1.520,00
Set VMP $\frac{3}{8} + \frac{1}{2} + \frac{3}{4}$"	578901R	1.570,00
Set VP 16 + 20 + 25	578095R	1.400,00
Set VRX 16 + 20 + 25	578094R	1.490,00

REMS pressing rings S Set

Accessories for REMS radial presses 22 kN



Supply format

REMS pressing rings S Set Mini Z8. REMS pressing rings S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Highly durable, made of tenacious, specially hardened special steel. The pressing contours are system-specific and correspond to the pressing contours of the respective press fitting systems. Thus perfect system-conformity, safe press jointing. Adapter tongs Mini Z8 for driving by all REMS radial presses 22 kN.

Description	Art.-No.	KM
REMS pressing rings S Set Mini Z8 in sturdy steel case		
F 16 + 20 + 26	574620R	1.290,00
M 15 + 18 + 22	574614R	1.290,00
M 15 + 22 + 28	574618R	1.290,00
TH 16 + 20 + 26	574622R	1.290,00
U 16 + 20 + 25	574634R	1.290,00
U 16 + 20 + 26	574636R	1.290,00
V 15 + 18 + 22	574612R	1.290,00
V 15 + 22 + 28	574616R	1.290,00
REMS pressing rings S Set Mini Z8 in L-Boxx system case		
BMP 6 + 8 + 10 + 12 + 15 + 16 + 18 + 22 + 28	574624R	2.950,00
BMP $\frac{1}{4} + \frac{3}{8} + \frac{1}{2} + \frac{5}{8} + \frac{3}{4} + \frac{7}{8}$ "	574632R	2.070,00
M 12 + 15 + 18 + 22 + 28 + 35	574626R	2.190,00
V 12 + 15 + 18 + 22 + 28 + 35	574628R	2.190,00
V 12 + 14 + 15 + 16 + 18 + 22 + 28 + 35	574630R	2.720,00

Robust, universal pressing tongs Mini Basic E01 for interchangeable pressing inserts, for pressing connection material for electric cables.

Pipe pressing joints	≤ 300 mm ²
For Klauke pressing inserts Series 22, narrow pressing	

REMS pressing tongs Mini Basic E01 – universal up to 300 mm².


Highly durable pressing tongs made of tenacious, specially hardened special steel. Locating pin integrated into the pressing jaws and additional snap positioning for secure seating and fast, easy changing of the pressing inserts.

Driven by all REMS radial presses 22 kN

For pressing connection material for electric cables, in connection with suitable, interchangeable Klauke pressing inserts Series 22, narrow pressing:

R 22 (6–300 mm²), IS 22 (10–150 mm²), F 22 (10–70 mm²), M 22 (1.5–16 mm²), N 22 (10–50 mm²), D 22 (6–300 mm²), DP 22 (2 × 70 mm²), Q 22 (10–70 mm²), ISQ 22 (10–70 mm²), RU 22 (10–300 mm²), A 22 (10–300 mm²), C 22/MC 22 (16–70 mm²), H 22 (70 mm²), AE 2213 (25–240 mm²).

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

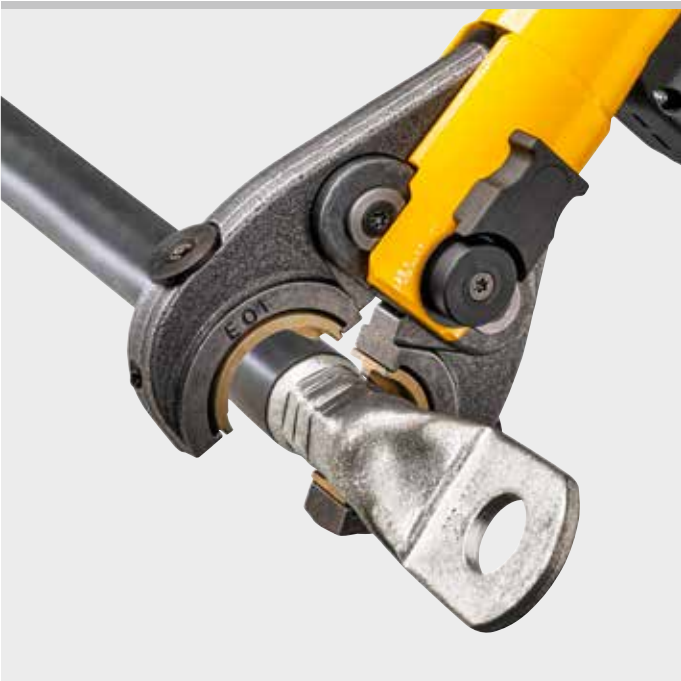

German Quality Product



Supply format

REMS pressing tongs Mini Basic E01. Robust, universal pressing tongs for pressing connection material for electric cables. For Klauke pressing inserts Series 22, narrow pressing. Without pressing inserts. In a carton.

	Art.-No.	KM
	578618	640,00

