

Robust quality tools for cutting tubes.  
Particularly suited for cutting stainless steel tubes.

Copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes  
Ø 3 – 120 mm  
Ø 1/8 – 4"

### REMS RAS Cu-INOX – for places with difficult access.

Small, handy, specially for use in restricted spaces.

Robust design and hardened back pressure rollers provide exact alignment to the tube and a long service life.

Large operating knob in metal for easy in-feed and cutting.

Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 3–28 S Mini with needle bearing cutter wheel and needle bearing counter-pressure rollers for very easy cutting.



### Supply format

**REMS RAS Cu-INOX.** Pipe cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	Din.
<b>Cu-INOX 3–16</b>	3–16 1/8–5/8"	4	113200R	<b>3 650,00</b>
<b>Cu-INOX 3–25</b>	3–25 1/8–1"	4	113230R	<b>4 410,00</b>
<b>Cu-INOX 3–28 Mini</b>	3–28 1/8–1 1/8"	4	113240R	<b>5 050,00</b>
<b>Cu-INOX 3–28 S Mini</b> on needle bearings	3–28 1/8–1 1/8"	4	113241R	<b>7 100,00</b>



Info



### REMS RAS Cu-INOX – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.


Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 3–35 S with needle bearing cutter wheel and needle bearing counter-pressure rollers for very easy cutting.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.

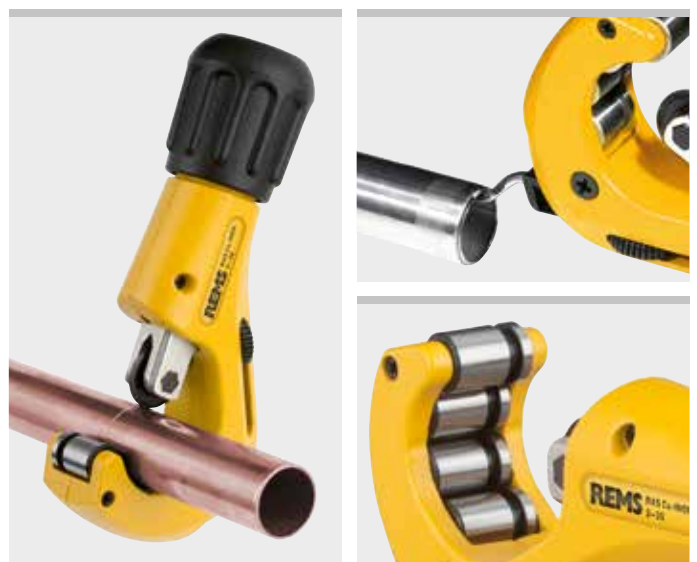

### Supply format

**REMS RAS Cu-INOX.** Pipe cutting machine for copper pipes, thin-walled stainless steel pipes, thin-walled steel-aluminium pipes, brass pipes, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	Din.
<b>Cu-INOX 3–35</b>	3–35 1/8–1 3/8"	4	113350R	<b>7 740,00</b>
<b>Cu-INOX 3–35 S</b> on needle bearings	3–35 1/8–1 3/8"	4	113351R	<b>10 200,00</b>
<b>Cu-INOX 3–42</b>	3–42 1/8–1 3/4"	4	113330R	<b>9 770,00</b>



### REMS RAS Cu-INOX – quality pipe cutter.

Robust, solid design for heavy-duty application.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 8–64 S and REMS RAS Cu-INOX 8–42 S with needle bearing cutter wheel and needle bearing counter-pressure rollers for very easy cutting. Quick adjustment of the engagement spindle in both directions.

Only 1 cutter wheel for the complete working capacity Ø 3–120 mm.




### Supply format

**REMS RAS Cu-INOX.** Pipe cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack/in box.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.	Din.
<b>Cu-INOX 3–28</b>	3–28 1/8–1 1/8"	4	113300R	<b>4 300,00</b>
<b>Cu-INOX 6–42</b>	6–42 1/4–1 5/8"	4	113380R	<b>20 300,00</b>
<b>Cu-INOX 8–42 S</b> on needle bearings, with quick adjustment	8–42 3/8–1 5/8"	4	113385R	<b>20 910,00</b>
<b>Cu-INOX 6–64</b>	6–64 1/4–2 1/2"	4	113400R	<b>23 740,00</b>
<b>Cu-INOX 8–64 S</b> on needle bearings, with quick adjustment	8–64 3/8–2 1/2"	4	113401R	<b>26 330,00</b>
<b>Cu-INOX 64–120</b>	64–120 2 1/2–4"	4	113500R	<b>34 320,00</b>

### Accessories

Description	Wall thick- ness s ≤ mm	Art.-No.	Din.
<b>Cutter wheel Cu-INOX 3–120, s 4</b>	4	113210R	<b>1 540,00</b>
<b>Cutter wheel Cu-INOX 3–120 S, s 4, on needle bearings</b>	4	113213R	<b>2 700,00</b>
<b>Universal deburring blade, ground</b>		113360	<b>1 010,00</b>



German Quality Products

